
DAY 4

Recap

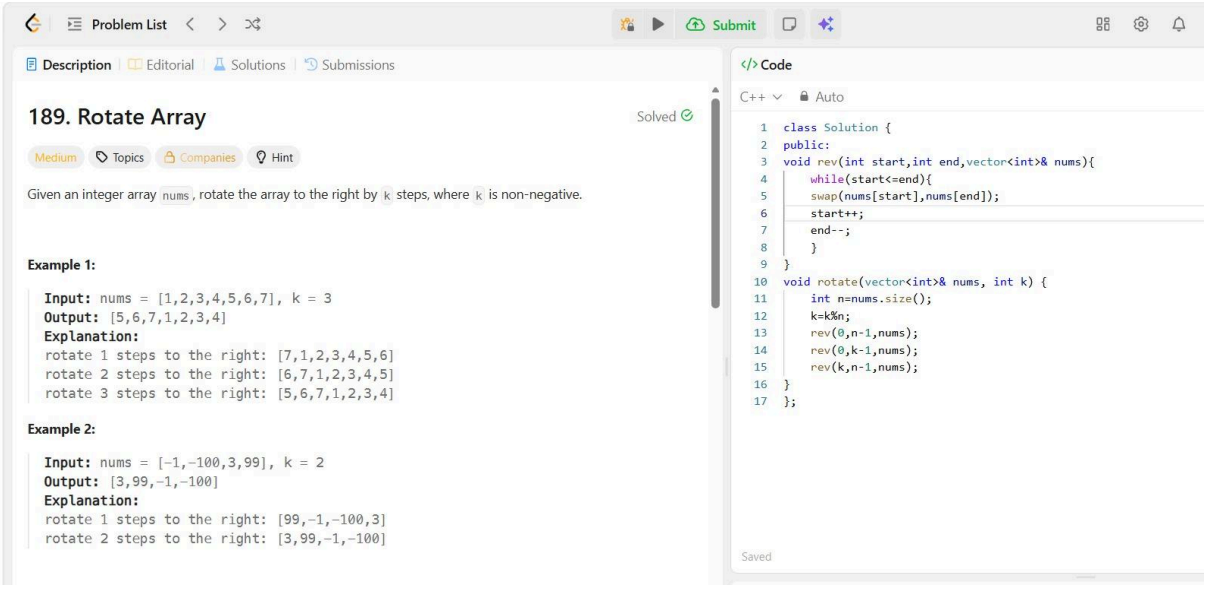

Problem List | Submit

Description | Editorial | Solutions | Submissions

189. Rotate Array

Solved

Medium | Topics | Companies | Hint

Given an integer array `nums`, rotate the array to the right by `k` steps, where `k` is non-negative.

Example 1:

```
Input: nums = [1,2,3,4,5,6,7], k = 3
Output: [5,6,7,1,2,3,4]
Explanation:
rotate 1 steps to the right: [7,1,2,3,4,5,6]
rotate 2 steps to the right: [6,7,1,2,3,4,5]
rotate 3 steps to the right: [5,6,7,1,2,3,4]
```

Example 2:

```
Input: nums = [-1,-100,3,99], k = 2
Output: [3,99,-1,-100]
Explanation:
rotate 1 steps to the right: [99,-1,-100,3]
rotate 2 steps to the right: [3,99,-1,-100]
```


Code


C++ | Auto


```cpp
class Solution {
public:
void rev(int start,int end,vector<int>& nums){
    while(start<=end){
    swap(nums[start],nums[end]);
    start++;
    end--;
    }
}
void rotate(vector<int>& nums, int k) {
    int n=nums.size();
    k=k%n;
    rev(0,n-1,nums);
    rev(0,k-1,nums);
    rev(k,n-1,nums);
}
};
```

Saved

TWO POINTERS

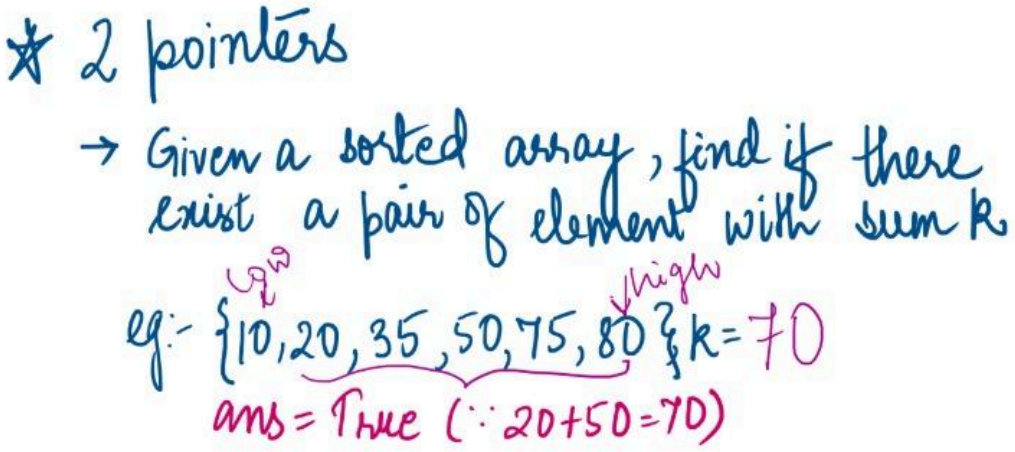

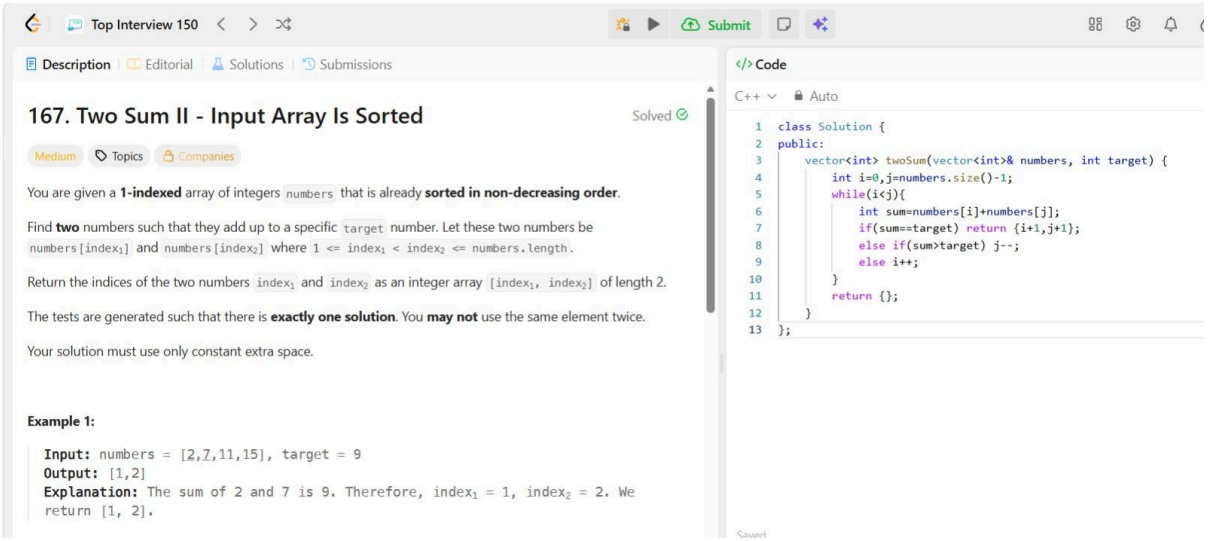
Top Interview 150
Submit
Description
Editorial
Solutions
Submissions
Code
C++
Auto
167. Two Sum II - Input Array Is Sorted
Solved
Medium
Topics
Companies
You are given a 1-indexed array of integers numbers that is already sorted in non-decreasing order.
Find two numbers such that they add up to a specific target number. Let these two numbers be numbers[index1] and numbers[index2] where 1 <= index1 < index2 <= numbers.length.
Return the indices of the two numbers index1 and index2 as an integer array [index1, index2] of length 2.
The tests are generated such that there is exactly one solution. You may not use the same element twice.
Your solution must use only constant extra space.
Example 1:
Input: numbers = [2,7,11,15], target = 9
Output: [1,2]
Explanation: The sum of 2 and 7 is 9. Therefore, index1 = 1, index2 = 2. We return [1, 2].
class Solution {
public:
vector<int> twoSum(vector<int>& numbers, int target) {
int i=0,j=numbers.size()-1;
while(i<j){
int sum=numbers[i]+numbers[j];
if(sum==target) return {i+1,j+1};
else if(sum>target) j--;
else i++;
}
return {};
}
};

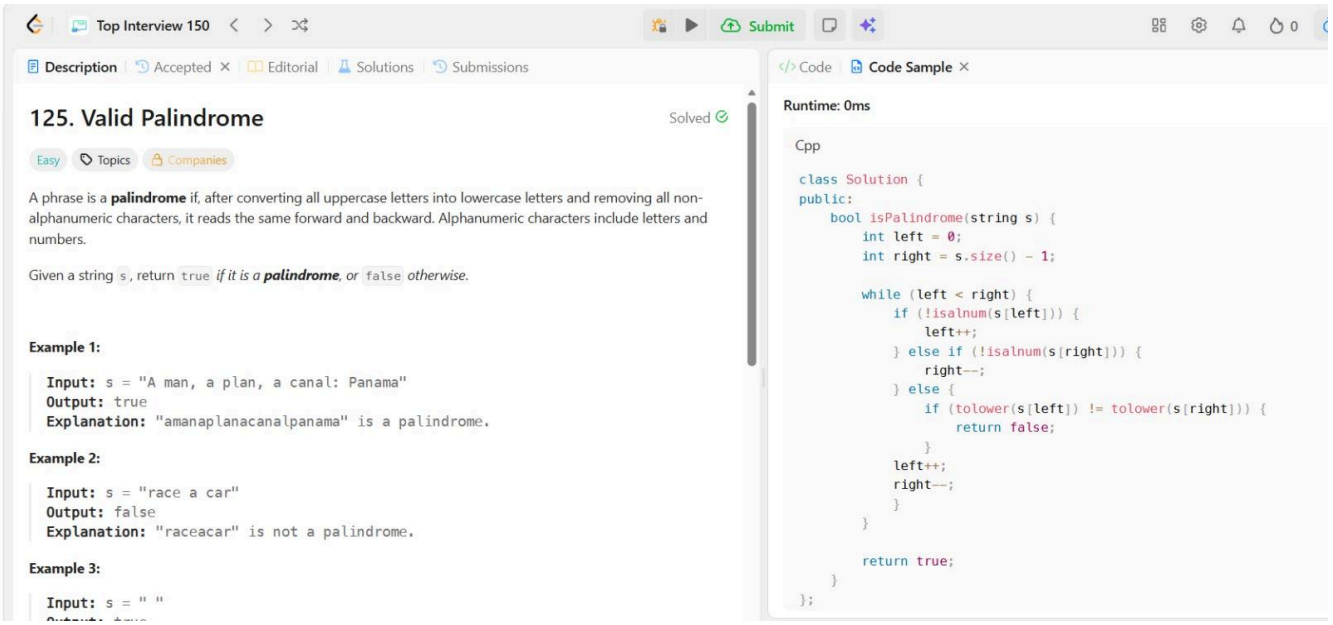
Top Interview 150
Submit
Description
Accepted
Editorial
Solutions
Submissions
Code
Code Sample
Runtime: 0ms
Cpp
125. Valid Palindrome
Solved
Easy
Topics
Companies
A phrase is a palindrome if, after converting all uppercase letters into lowercase letters and removing all non-alphanumeric characters, it reads the same forward and backward. Alphanumeric characters include letters and numbers.
Given a string s, return true if it is a palindrome, or false otherwise.
Example 1:
Input: s = "A man, a plan, a canal: Panama"
Output: true
Explanation: "amanaplanacanalpanama" is a palindrome.
Example 2:
Input: s = "race a car"
Output: false
Explanation: "raceacar" is not a palindrome.
Example 3:
Input: s = " "
class Solution {
public:
bool isPalindrome(string s) {
int left = 0;
int right = s.size() - 1;
while (left < right) {
if (!isalnum(s[left])) {
left++;
} else if (!isalnum(s[right])) {
right--;
} else {
if (tolower(s[left]) != tolower(s[right])) {
return false;
}
left++;
right--;
}
}
return true;
}
};