

XML-RPC communication


XML-RPC is a Remote Procedure Call method that uses XML to transfer data between programs over sockets. With it, the UR controller can call methods/functions (with parameters) on a remote program/server and get back structured data. The UR controller handles writing the XML-RPC client messages, i.e. it handles all the details of translating between UR types and XML on the wire.

For many programming languages free XML-RPC servers are available, among others for: Python, Java, C++ and C. In here we provide a simple example where we want to make the robot move using a pose retrieved from a fake remote camera. The remote “camera” program, providing the next target pose, is exemplified in both Python and C++.

Please also consult the UR script manual for more information on the XML-RPC.

PolyScope program

PolyScope program xmlrpc_example.urp:

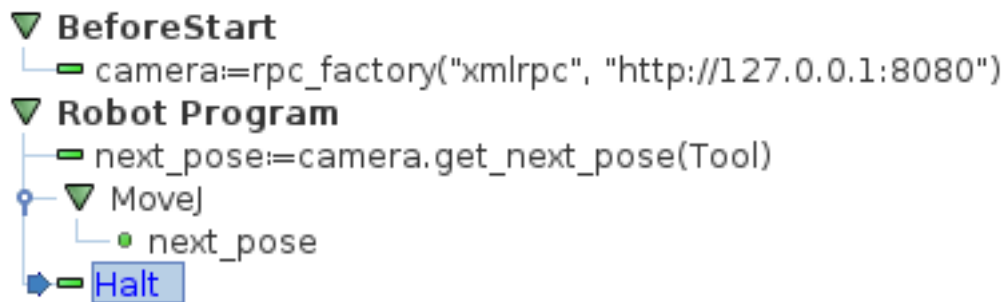

In the **BeforeStart** sequence we make the connection to the external program and give it the name “camera”. In the **Robot Program** body we ask for the next pose by calling the function `get_next_pose` on the camera, with the current `Tool` pose as an argument. The `get_next_pose` is implemented by the remote program and requires in this example one pose as an input argument. The UR controller will automatically make all of the necessary conversions to communicate over XML-RPC with the remote program (including conversion of the pose). During the execution of the `get_next_pose` function the PolyScope program waits. When the `get_next_pose` returns with a pose, the `MoveJ` moves the robot to the `next_pose`.

Some attention points:

- It is important that connections to the remote program are built-up in the **BeforeStart** sequence, since it takes a relatively long time to build up the connection compared to performing the function call. When the “camera” is not used it causes no overhead.
- XML-RPC function calls are transferred to remote programs. Depending on the computing power & network speed the reaction time for the `get_next_pose` might vary.
- When the program stops, the XML-RPC connection will be automatically cleaned up.

Python

The example Python “camera” program receives a pose and sends a fixed pose back. The PolyScope program is in charge of moving the actual robot.

Python 2.7 code, xmlrpc_camera.py:

```
import xmlrpclib
from SimpleXMLRPCServer import SimpleXMLRPCServer
import urllib

def get_next_pose(p):
    pose = urllib.poseToList(p)
    print "Received pose: " , pose
    pose = [-0.18, -0.61, 0.23, 0, 3.12, 0.04];
    return urllib.listToPose(pose);

server = SimpleXMLRPCServer("", 8080), allow_none=True)
print "Listening on port 8080..."
server.register_function(get_next_pose, "get_next_pose")
server.serve_forever()
```

Running the example

This example uses a Linux PC (for example Ubuntu 14.04).

- 0) Download the xmlrpc_camera.py and urllib.py
- 1) Open a terminal
- 2) Navigate to the downloaded file
- 3) Type in the following command and press enter: python xmlrpc_camera.py
- 4) Now the server runs and can be contacted
- 5) Download the xmlrpc_example.urp and transfer it to the robot
- 6) Replace the IP-address in the “http://127.0.0.1:8080” string with the one from the Linux PC, for example: “http://192.168.1.10:8080”.
- 7) Press play to run the PolyScope program

If everything works well the robot moves to the fixed pose. The Python “camera” server will give an output that will be similar to:

```
127.0.0.1 - - [26/Jan/2015 15:50:21] "POST / HTTP/1.1" 200 -
Received pose: [-0.18, -0.61, 0.23, 0, 3.12, 0.04]
```

Note, the “Received pose” will be equal to the robot's Tool pose when it was started.

C++

This example shows the same functionality as for Python. For C++ the free library XMLRPC-C [<http://xmlrpc-c.sourceforge.net/>] can be used and is available in most standard Linux distributions by default. Furthermore, its website also features a lot of useful examples and hints to make the C++ programming easier. To install on Ubuntu 14.04 type:

```
sudo apt-get update
```

```
sudo apt-get install libxmlrpc-c++8 g++
```

Running the example

0) Download the xmlrpc_cpp.tar.gz

1) Open a terminal and unpack the tar.gz with: `tar xf xmlrpc_cpp.tar.gz`

2) Compile the code using g++: `make`

3) Start the executable with: `./xmlrpc_camera`

4) Now the server runs and can be contacted

5) Download the xmlrpc_example.urp and transfer it to the robot

6) Remove the “http://” and replace the IP-address in the “http://127.0.0.1:8080” string with the one from the Linux PC, for example: “129.168.1.10:8080”.

7) Press play to run the PolyScope program

If everything works well the robot moves to the fixed pose. The C++ “camera” server will give an output that will be similar to:

```
Received pose: p[-0.18, -0.610001, 0.368829, 0, 3.12, 0.04]
```

Note, the “Received pose” will be equal to the robot's Tool pose when it was started.