Prompts for AI roast generator

First: -

Develop a basic C++ console application that generates humorous roast messages.

The program should:

1. Prompt the user to enter their name
2. Maintain a collection of at least 10 roast messages
3. Randomly select a different roast each time the program is executed
4. Replace the placeholder {name} in the selected message with the user's input
5. Display the final roast message on the screen
6. Include clear and simple comments in the code to explain each step

Ensure that the output varies on each run and the code remains easy to understand.

Output by this prompt….

```
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT> cd "c:\Users\Laxmi\OneDrive\Desktop\FOC
P2-ASSIGNMENT\" ; if ($?) { g++ roast_generator.cpp -o roast_generator } ; if ($?) { .\roast
_generator }
Enter your name: xyz

 Roast Incoming
xyz, if effort were money, you'd be broke.
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT>
```

Second: -

Where I suggested some changes….

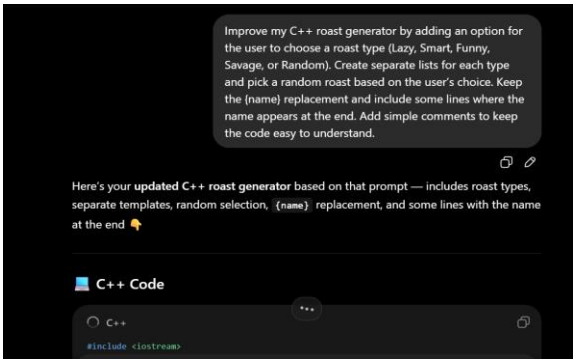

Output by this prompt….

```
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT> cd "c:\Users\Laxmi\OneDrive\Desktop\FOC
P2-ASSIGNMENT\" ; if ($?) { g++ roast_generator.cpp -o roast_generator } ; if ($?) { .\roast
_generator }
Enter your name: xyz

Choose roast type:
1. Lazy Roast
2. Smart Roast
3. Funny Roast
4. Savage Roast
5. Random Roast
Enter your choice (1-5): 2

 Roast Result
Even Google can't decode your thinking, xyz.
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT>
```

Third: -

Final code generated….

Make the roast messages in my C++ program sharper and more like real roasts. Replace the current lines with more direct and impactful ones using better wording, while keeping them appropriate. Also vary the structure by adding some lines where the name comes at the end. Do not change the program logic.

o logic changes, just **stronger, sharper roast lines** with better wording and some where the **name comes at the end**.

e your existing roast vectors with these:

Final Output…

```
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT> cd "c:\Users\Laxmi\OneDrive\Desktop\FOC
P2-ASSIGNMENT\" ; if ($?) { g++ roast_generator.cpp -o roast_generator } ; if ($?) { .\roast
_generator }
Enter your name: rahul

Choose roast type:
1. Lazy Roast
2. Smart Roast
3. Funny Roast
4. Savage Roast
5. Random Roast
Enter your choice (1-5): 2

 Roast Result
You argue like you're right, but it never works out, rahul.
PS C:\Users\Laxmi\OneDrive\Desktop\FOCP2-ASSIGNMENT>
```