

create account

login / logout

invalidate token

forgot password ~~richiede un nuovo round di~~ ~~autenticazione~~, ~~genera~~ ~~nuovi~~ ~~token~~ ~~restituisce~~  
bulk invalidate ? e access + refresh token restituiti

Where to put the  
secret on the server?  
env variable


an access token can be requested:

- if never before for the same resource
- if expired


└ server listens to an  
event that includes the  
secret and creates a new  
└ one

# Workflows


## Authentication

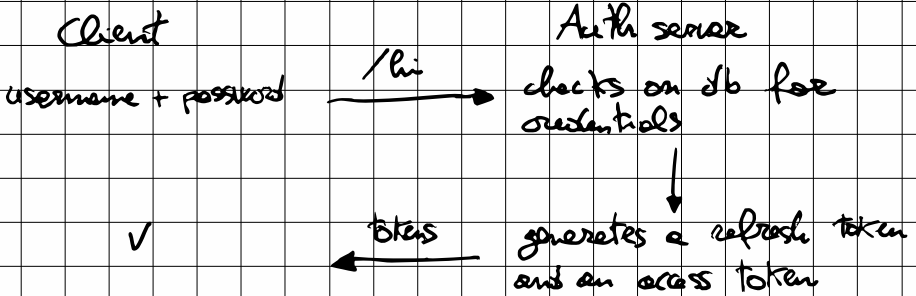

## Fetch a resource

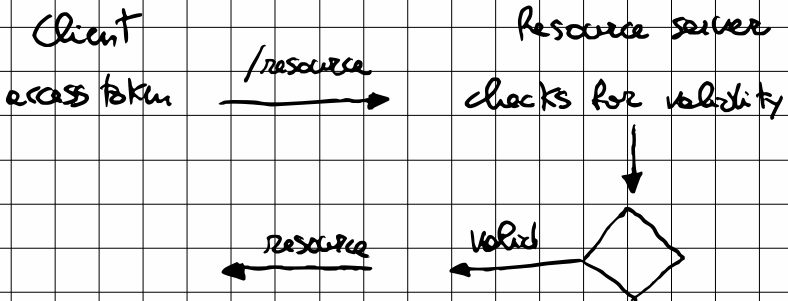


## Fetch resource

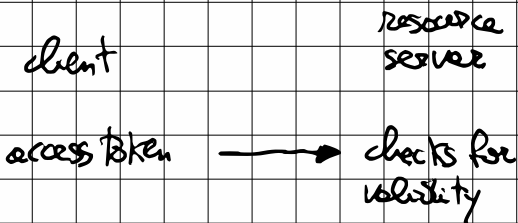


# Workflows

## login user

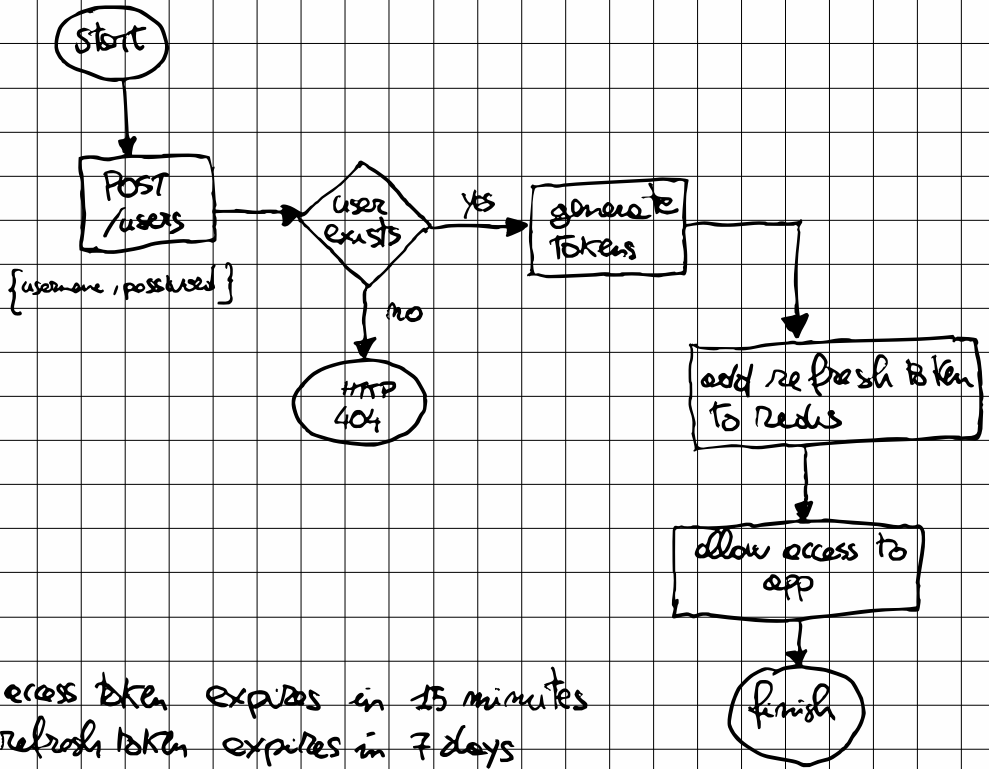


## logout user

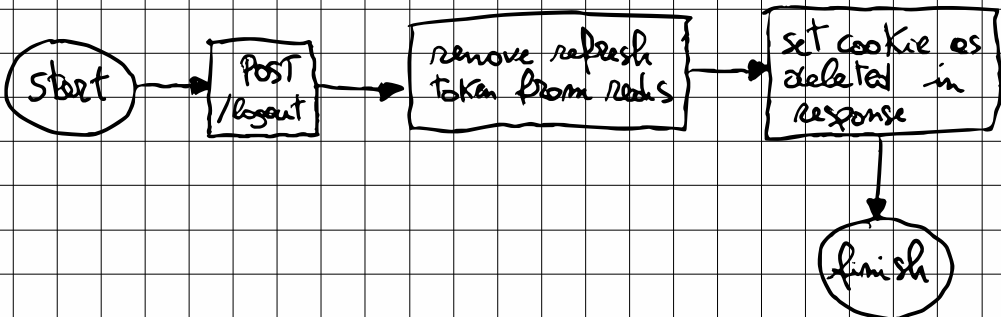

## Change roles

This is performed via a script, no route is available

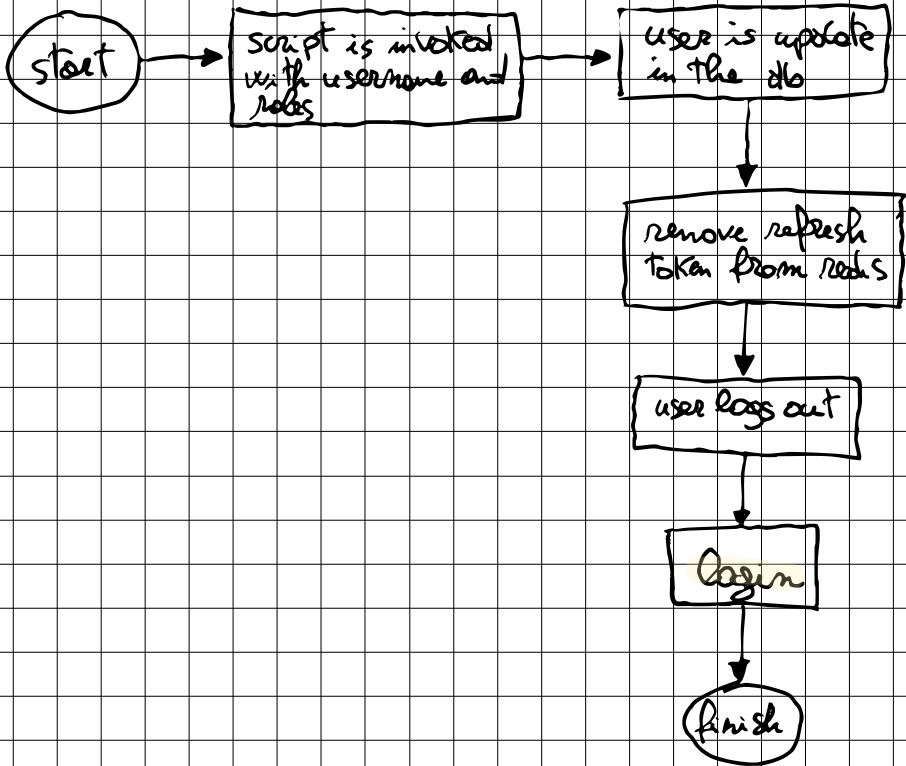

## revoke tokens up to

This is performed via a script, no route is available

