
# CORN — developer / operational architecture

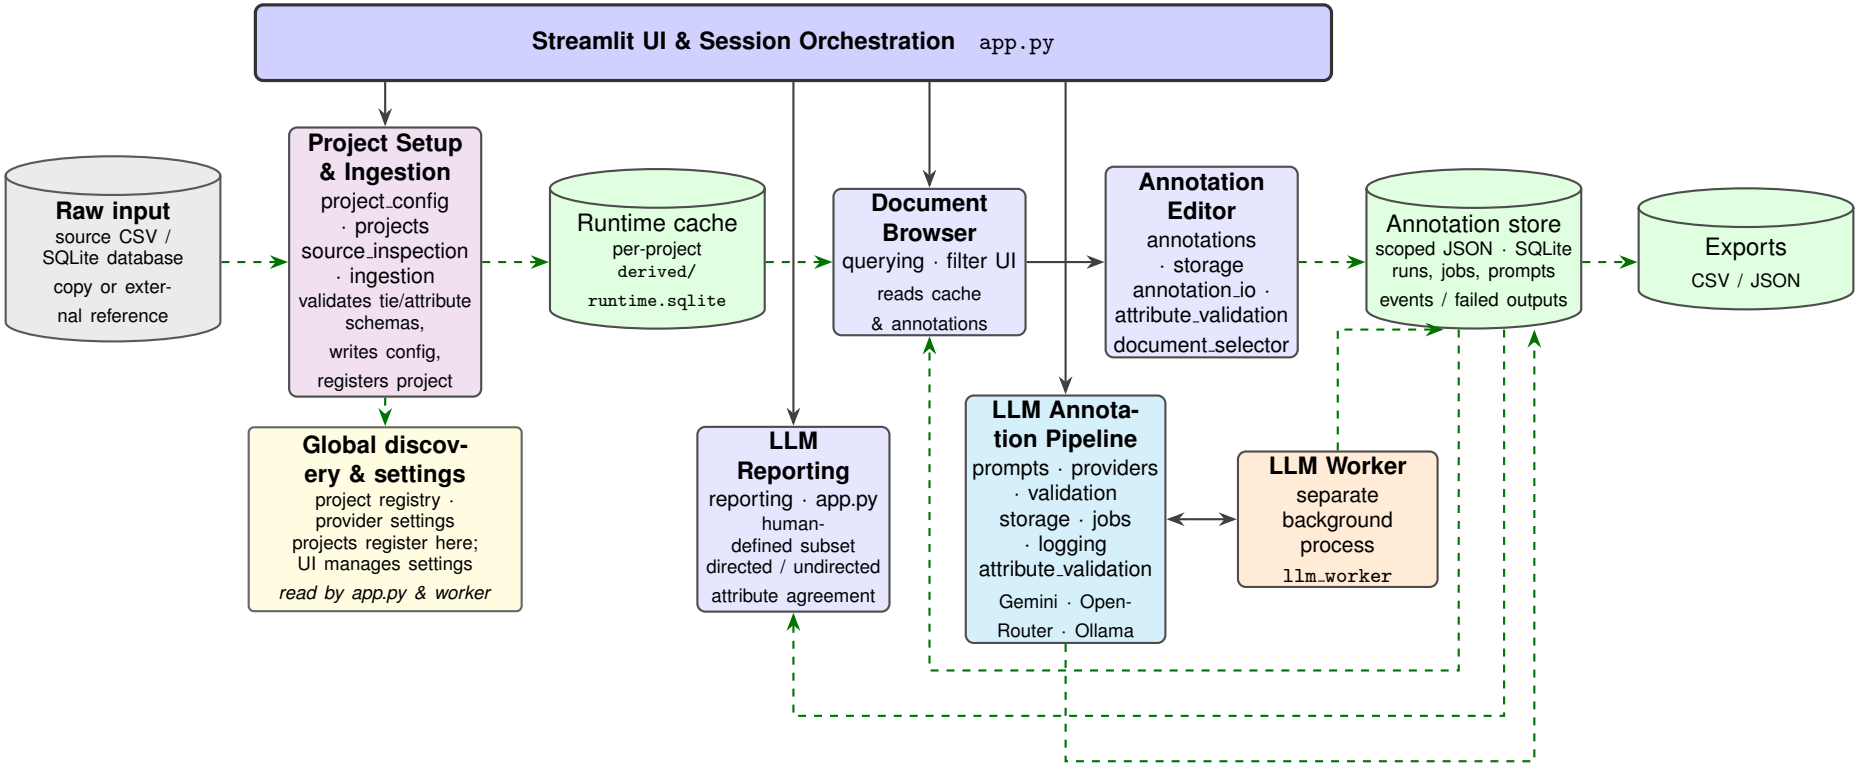


**Operational quick-start (developer onboarding)**

**Run UI:** `python -m streamlit run app.py`

**Run worker** (separate, long-lived process):

```
python -m corn.llm_worker --registry-path data/project_registry.yaml --provider-settings-path data/provider_settings.json --worker-id <id>
```

**Reporting:** computed on demand over a human-defined document set; supports directed/undirected ties, optional human-coverage filtering, and tie-attribute agreement.

The worker loops over *all* registered projects and writes runs into *each* project's own `annotations/annotations.sqlite`; there is no single global annotation DB.

**Tests:** `pytest -q`

**Project root:** `data/projects/<slug>/` — holds config, copied source (reference mode stays external), runtime cache, scoped annotation JSON, SQLite state, and LLM logs.

**Global (app-wide):** `data/project_registry.yaml`, `data/provider_settings.json`.

