

Dataset Destinations

Contents

- Dataset Destinations..... 3**
 - View Dataset Destinations.....3
 - Create a Dataset Destination.....4
 - View Dataset Destination Information.....6
 - Modify Dataset Destination Information..... 8
 - Delete a Dataset Destination..... 11

Dataset Destinations


Datasets can be exported to consuming database systems. You define each destination database as a separate dataset destination.

View Dataset Destinations


View dataset destinations on the **Dataset Destinations** screen of the **System Configuration** page.

To view defined dataset destinations:

1.

Open the **System Configuration** screen, by clicking the **System Configuration** icon.  in the left navigation bar.

The **System Configuration** page opens on the Password Policy screen.

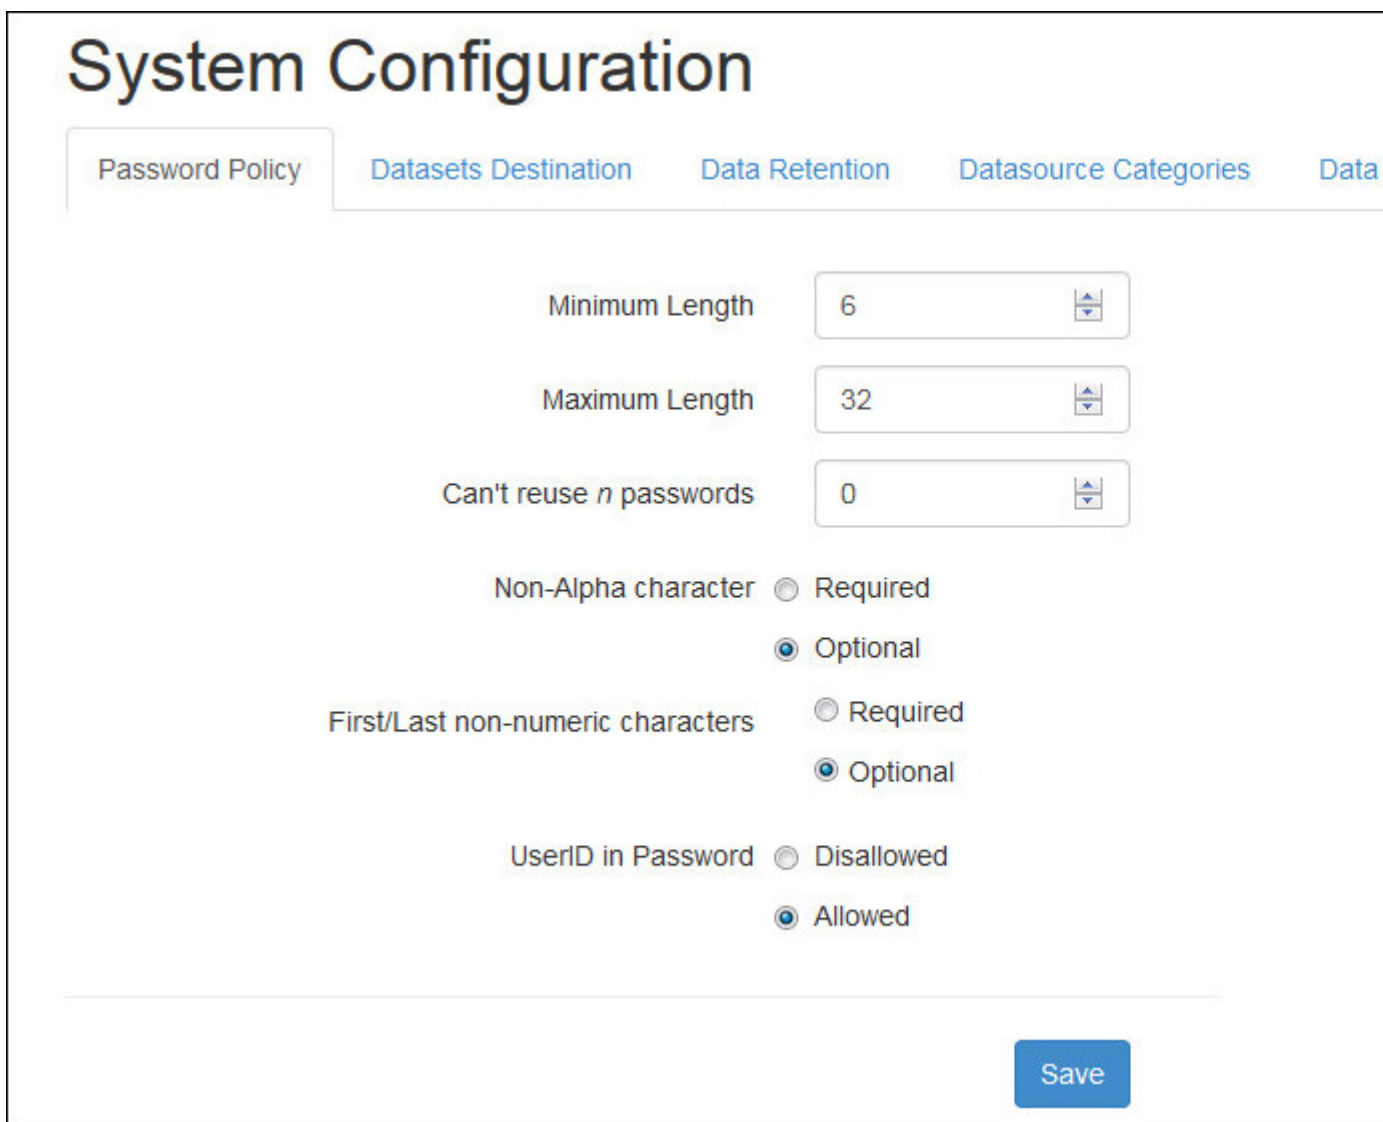

System Configuration

[Password Policy](#)
[Datasets Destination](#)
[Data Retention](#)
[Datasource Categories](#)
[Data](#)

Minimum Length

Maximum Length

Can't reuse *n* passwords

Non-Alpha character ☐ Required ☒ Optional


First/Last non-numeric characters ☐ Required ☒ Optional

UserID in Password ☐ Disallowed ☒ Allowed


[Save](#)

2. Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.

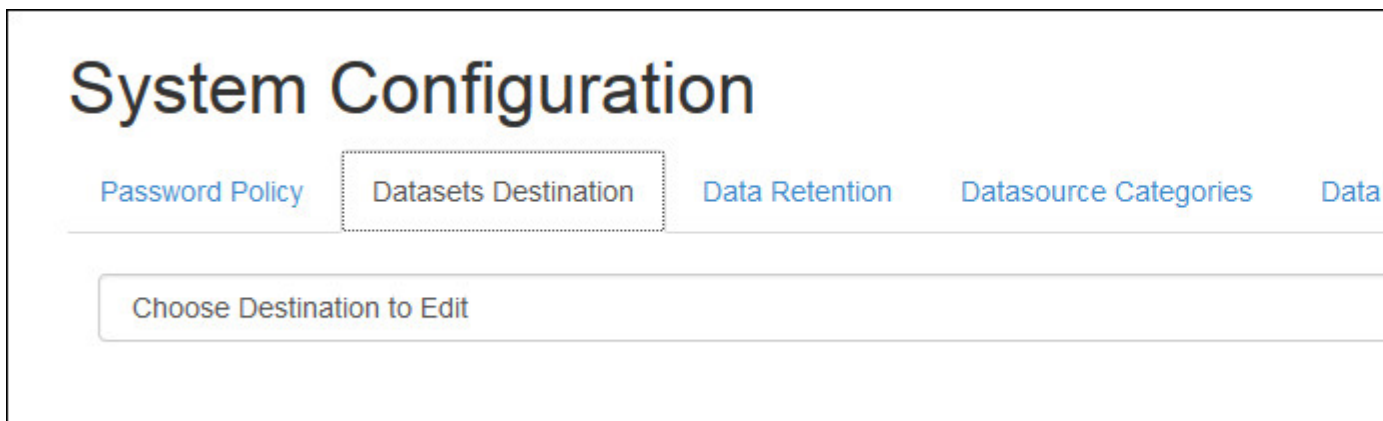

3. At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations.

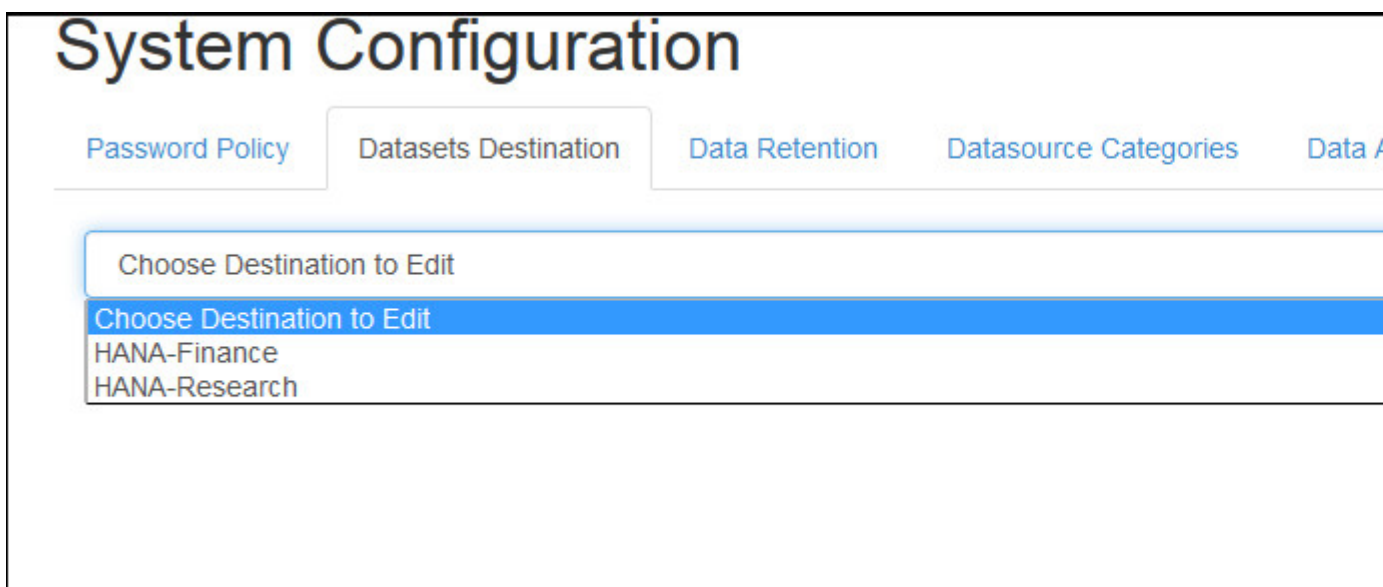


Create a Dataset Destination

Define a new dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To create a new dataset destination:

- 1.

Open the **System Configuration** screen, by clicking the **System Configuration** icon,  in the left navigation bar.

The **System Configuration** page opens on the **Password Policy** screen.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Minimum Length
6

Maximum Length
32

Can't reuse *n* passwords
0

Non-Alpha character
☐ Required
☒ Optional

First/Last non-numeric characters
☐ Required
☒ Optional

UserID in Password
☐ Disallowed
☒ Allowed

Save

- Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Choose Destination to Edit

- To the right of the **Choose Destination to Edit** field, click the **New Destination** button.

The **Destination Details** screen opens.

4. Enter the destination details.

Option	Description
Name	Mandatory. The name of the destination.
Type	Mandatory. The destination type. Supported values are as follows: <ul style="list-style-type: none"> • MySQL. The destination is a MySQL database. • HANA. The destination is a SAP HANA database.
Host	Mandatory. The IP address of the destination, in dotted decimal format.
Port	Mandatory. The port on the destination to send data to.
Database Name	Mandatory. The name of the destination database.
Schema	Mandatory. The schema being used in the destination database.
User Name	Mandatory. The user name to be used to log on to the database.
Password	Mandatory. The password to be used to log on to the database.
Confirm Password	Mandatory. Re-enter the password to ensure it is correct.


5. Click the **Save Destination** button to save the new destination.

View Dataset Destination Information

View the information configured for a given dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To view information for a dataset destination:

1.

Open the **System Configuration** screen, by clicking the **System Configuration** icon.  in the left navigation bar.

The **System Configuration** page opens on the **Password Policy** screen.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Minimum Length
6

Maximum Length
32

Can't reuse *n* passwords
0

Non-Alpha character
☐ Required
☒ Optional

First/Last non-numeric characters
☐ Required
☒ Optional

UserID in Password
☐ Disallowed
☒ Allowed

Save

- Click the **Dataset Destinations** tab.


The **Dataset Destinations** screen opens.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Choose Destination to Edit

- At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to view.

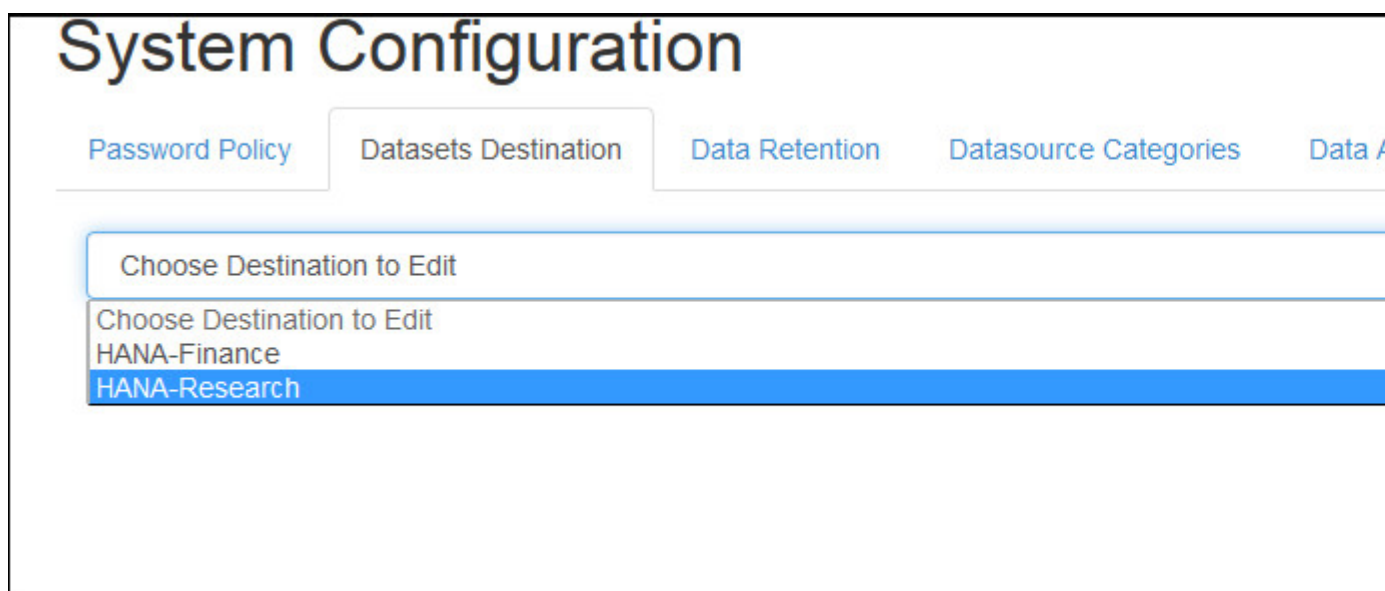


The screen for the selected destination opens, showing the information configured for it.

Modify Dataset Destination Information

Modify the information configured for a given dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To modify information for a dataset destination:

1.

Open the **System Configuration** screen, by clicking the **System Configuration** icon.  in the left navigation bar.

The **System Configuration** page opens on the **Password Policy** screen.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Minimum Length
6

Maximum Length
32

Can't reuse n passwords
0

Non-Alpha character
☐ Required
☒ Optional

First/Last non-numeric characters
☐ Required
☒ Optional

UserID in Password
☐ Disallowed
☒ Allowed

Save

- Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Choose Destination to Edit

- At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to modify.

System Configuration

[Password Policy](#)
[Datasets Destination](#)
[Data Retention](#)
[Datasource Categories](#)
[Data A](#)

The **Destination Details** screen for the destination opens, showing configured information.

System Configuration

[Password Policy](#)
[Datasets Destination](#)
[Data Retention](#)
[Datasource Categories](#)
[Data Attribute](#)

Destination Details

Name

Type

Host

Port

Database Name

Schema

User Name

- Click the **Edit Destination** button. Enter the destination details.

Option	Description
Name	Mandatory. The name of the destination.
Type	Mandatory. The destination type. Supported values are as follows: <ul style="list-style-type: none"> MySQL. The destination is a MySQL database. HANA. The destination is a SAP HANA database.
Host	Mandatory. The IP address of the destination, in dotted decimal format.
Port	Mandatory. The port on the destination to send data to.
Database Name	Mandatory. The name of the destination database.
Schema	Mandatory. The schema being used in the destination database.
User Name	Mandatory. The user name to be used to log on to the database.


- If you need to modify the connection password, click the **Modify Connection Password** button. Enter the password in the **Password** field, then re-enter in the **Confirm Password** field.
- Click the **Save Destination** button to save the information.

Delete a Dataset Destination

Delete a dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To delete a dataset destination:

-

Open the **System Configuration** screen, by clicking the **System Configuration** icon.  in the left navigation bar.

The **System Configuration** page opens on the **Password Policy** screen.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Minimum Length
6

Maximum Length
32

Can't reuse *n* passwords
0

Non-Alpha character
☐ Required
☒ Optional

First/Last non-numeric characters
☐ Required
☒ Optional

UserID in Password
☐ Disallowed
☒ Allowed

Save

- Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.

System Configuration

Password Policy
Datasets Destination
Data Retention
Datasource Categories
Data

Choose Destination to Edit

- At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to delete.

System Configuration

[Password Policy](#)
[Datasets Destination](#)
[Data Retention](#)
[Datasource Categories](#)
[Data A](#)

The **Destination Details** screen for the destination opens.

System Configuration

[Password Policy](#)
[Datasets Destination](#)
[Data Retention](#)
[Datasource Categories](#)
[Data Attribute](#)

Destination Details

Name

Type

Host

Port

Database Name

Schema

User Name

4. Click the **Edit Destination** button. The **Delete Destination** and **Save Destination** buttons appear as options on the screen.
5. Click the **Delete Destination** button to delete the destination.
The system asks you to confirm that you want to permanently delete the destination. Click the **Delete** button.