

# **Contents**

Dataset Destinations	
View Dataset Destinations.	
Create a Dataset Destination.	
View Dataset Destination Information.	
Modify Dataset Destination Information.	
Delete a Dataset Destination	

## **Dataset Destinations**

Datasets can be exported to consuming applications and tools.

Tell me about datasets.

Datasets can be consumed by querying them through the PHEMI Central RESTful API or by configuring a "destination" in the Management and Governance Console.

Dataset destinations are configured by the PHEMI Administrator. The destination is characterized in terms of the connection type, the network parameters, the destination database and schema names, and the user credentials for logging on to the destination.

#### **View Dataset Destinations**


View dataset destinations on the **Dataset Destinations** screen of the **System Configuration** page.

To view defined dataset destinations:

1. Open the **System Configuration** page, by clicking the **System Configuration** icon in the left navigation bar.



The System Configuration page opens on the Password Policy screen.

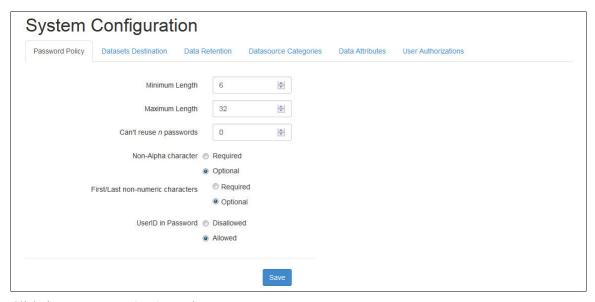

2. Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.



At the right of the Choose Destination to Edit field, click the drop-down arrow to see configured dataset destinations.



#### **Create a Dataset Destination**


Define a new dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To create a new dataset destination:

1. Open the **System Configuration** page, by clicking the **System Configuration** icon in the left navigation bar.



The System Configuration page opens on the Password Policy screen.

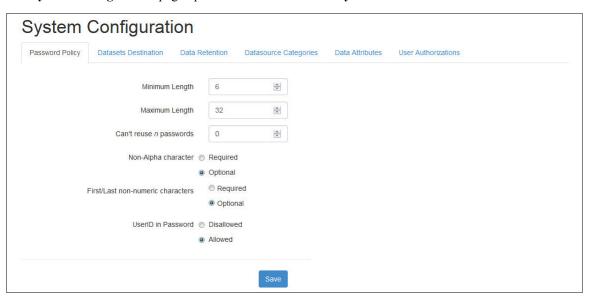


2. Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.



3. To the right of the Choose Destination to Edit field, click the New Destination button.

The **Destination Details** screen opens.

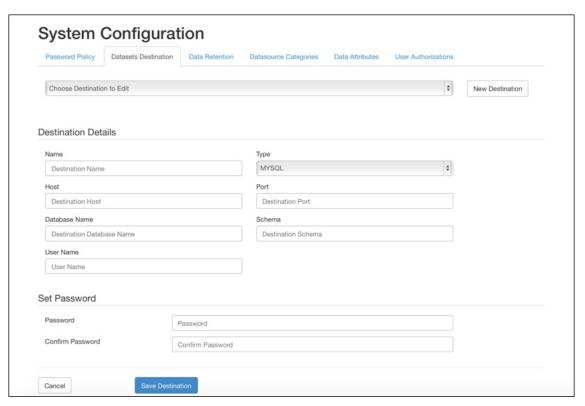

4. Enter the destination details.

Option	Description
Name	Mandatory. Provide a name for the destination.
Type	Mandatory. The destination type. Supported values are as follows:
	<ul> <li>MySQL. The destination is a MySQL database. Both ODBC and JDBC connection types are supported.</li> <li>HANA. The destination is a SAP HANA database.</li> </ul>
Host	Mandatory. The IP address of the destination, in dotted decimal format.
Port	Mandatory. The destination TCP port.
<b>Database Name</b>	Mandatory. The name of the destination database.
Schema	Mandatory. The name of the schema being used in the destination database.
User Name	Mandatory. The user name for logging on to the destination.
Password	Mandatory. The password for logging on to the destination.
Confirm Password	Mandatory. Re-enter the password to ensure it is correct.

5. Click the Save Destination button to save the new destination.

### **View Dataset Destination Information**


View information about a dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To view information for a dataset destination:

1. Open the System Configuration page, by clicking the System Configuration icon in the left navigation bar.



The System Configuration page opens on the Password Policy screen.

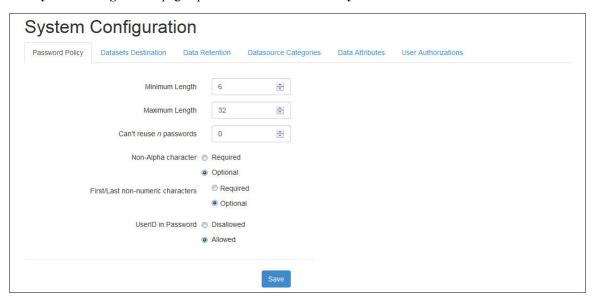


2. Click the **Dataset Destinations** tab.


The **Dataset Destinations** screen opens.



**3.** At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to view.

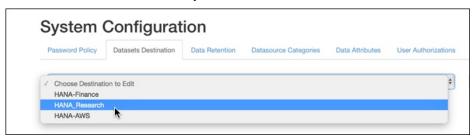

4. The **Destination Details** screen opens, showing information for the selected dataset.

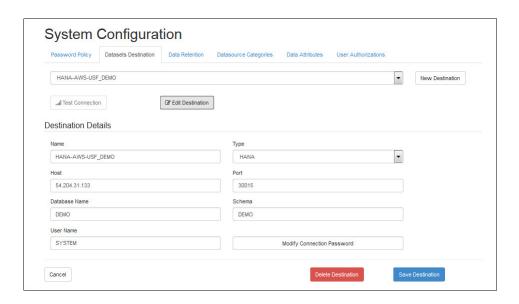

## **Modify Dataset Destination Information**


Modify information for a dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To modify information for a dataset destination:

1. Open the System Configuration page, by clicking the System Configuration icon in the left navigation bar.



The System Configuration page opens on the Password Policy screen.

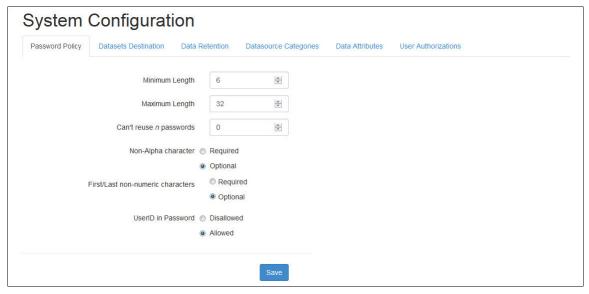

2. Click the Dataset Destinations tab.


The **Dataset Destinations** screen opens.




**3.** At the right of the **Choose Destination to Edit** field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to modify.



4. The **Destination Details** screen opens, showing information for the selected dataset. What do these fields mean?

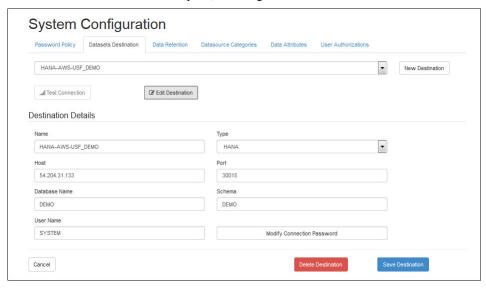


5. Click the **Edit Destination** button. The fields on the **Destination Details** screen become editable, and the **Delete Destination** buttons and **Save Destination** buttons appear.

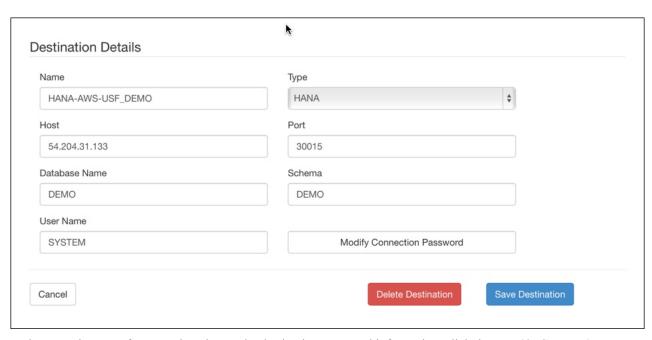

**6.** Make your changes. If you need to change the destination password information, click the **Modify Connection Password** button.

The **Set Password** pane opens underneath the other destination information.

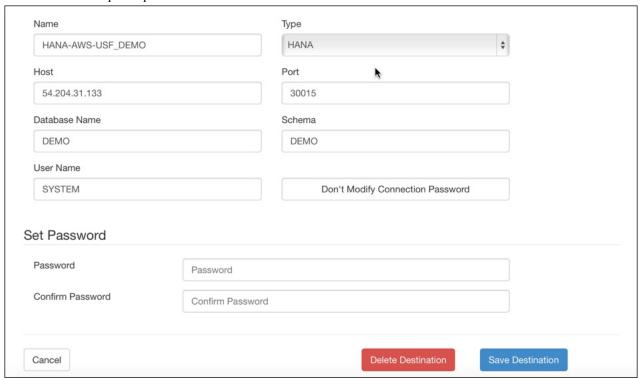

7. Complete your changes, then click the Save Destination button to save the changed information.


#### **Delete a Dataset Destination**

Delete a dataset destination on the **Dataset Destinations** screen of the **System Configuration** page.

To delete a dataset destination:



The System Configuration page opens on the Password Policy screen.

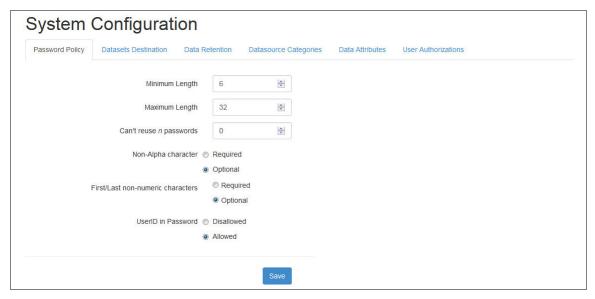

2. Click the **Dataset Destinations** tab.

The **Dataset Destinations** screen opens.

- 3. At the right of the Choose Destination to Edit field, click the drop-down arrow to see configured dataset destinations. Select the destination you want to delete.
- **4.** The **Destination Details** screen opens, showing information for the selected dataset.
- 5. Click the **Edit Destination** button. The fields on the **Destination Details** screen become editable, and the **Delete Destination** buttons and **Save Destination** buttons appear.
- 6. Click the **Delete Destination** button. The system asks you to confirm permanent deletion. Click **Delete**.