

Argus: A General-Purpose Agentic Runtime for Long-Horizon Reasoning

Compounding Intelligence through Persistent State, Experimentation, and Review



Shanghai Jiao Tong University



Abstract. Long-horizon reasoning requires more than extending a single model session. A research system must preserve objectives across restarts, turn decisions into real experiments, separate execution from acceptance, and retain useful lessons for later work. We present Argus, a persistent runtime organized around four model-driven roles—Manager, Planner, Engineer, and Reviewer—that operate over bounded missions and durable project state. The runtime records an append-only experiment trace, maintains curated cross-session memory, and updates reusable skills, procedures, verifiers, and routing while holding the underlying model parameters fixed. We formalize this process as dense intelligence and review-gated runtime evolution, and give a decision-theoretic account of how typed process data can become reviewed, reusable capability. Using GPT-5.5, we report task-native outcomes across seven benchmark arenas. On SWE-Bench Pro, Direct Copilot with GPT-5.5/xhigh reaches approximately 59% accuracy; Argus reaches approximately 78% while using $1.41\times$ the aggregate Tokens. The same run enables deeper analyses of self-evolution and Reviewer intervention. Copilot per-wave resource traces are unavailable, so the longitudinal analysis concerns Argus alone. Relative to the W1–6 startup window, the mature W19–22 window uses 21% fewer solve input tokens and 15% less active workflow time per task. The trajectory is not monotone: task-mix shifts and the final hard-tail waves produce visible reversals. Reviewer feedback requests revision on 43 tasks; 34 later pass the official verifier and 22 complete the strict review-loop rescue. A complementary mathematical trace follows one objective across recovery, route rejection, proof production, revision, acceptance, and the next mission. Together, the benchmark trajectory and vertical case connect runtime organization to measured long-horizon behavior. The retained trajectories also form structured training data for future supervised and reinforcement learning.


Keywords: general-purpose agentic runtime; long-horizon reasoning; compounding intelligence; persistent state; experimentation; review.

Code: github.com/lbx154/argus-skill

This is a living technical report. Public result cards were retrieved on July 14, 2026; the SWE-Bench Pro experiment record was frozen on July 18, 2026.

Dense-intelligence research

Continuous proposal—execution—verification over durable state

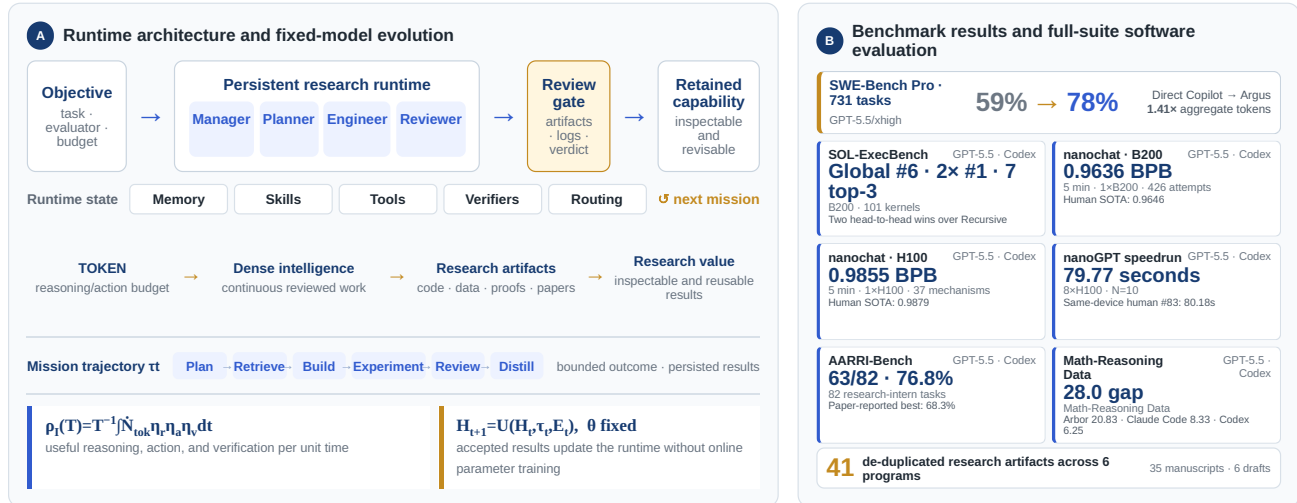

Architecture is schematic; result cards retain task-native units and are not cross-normalized.

Public arenas: GPT-5.5 · Codex | SWE-Bench Pro: GPT-5.5/xhigh

Figure 1. Argus at a glance. (A) A dense-intelligence objective enters a role-separated runtime; artifacts and run results pass through a review gate before updating reusable state around a fixed model. (B) The result panel retains six heterogeneous public arenas and 41 research artifacts, and adds the unified SWE-Bench Pro result: approximately 59% for Direct Copilot versus 78% for Argus at $1.41\times$ aggregate tokens. Task-native public values are not cross-normalized.

1 Introduction

Scientific research is a long-horizon activity. A useful result usually emerges from a sequence of dependent decisions: selecting a direction, modifying an artifact, running an experiment, interpreting the measurements, and deciding what to try next. The difficulty is therefore not only whether a model can solve an isolated reasoning problem, but whether a system can preserve the state of inquiry across many model calls, tool invocations, failures, restarts, and delayed measurements.

Large language model agents have progressed from tool use and software execution to complete research loops. ReAct, SWE-agent, and OpenHands established practical interfaces between models and external environments (Yao et al., 2023; Yang et al., 2024; Wang et al., 2024a). The AI Scientist, CycleResearcher, AutoSci, FARS, and Arbor extend this interaction into iterative research programs spanning planning, experiments, review, memory, and scientific communication (Lu et al., 2024; Weng et al., 2025; Qian et al., 2026; Tang et al., 2026; Jin et al., 2026). Their progress makes the central systems problem clear: long execution becomes research capability only when results accumulate across iterations and remain usable by later work.

In practice, long-running agents fail in three recurrent ways, consistent with results showing that agent success declines as software-task horizons grow (Kwa et al., 2025). First, *continuity* is fragile: a growing transcript is eventually compacted or dropped, and later calls spend time reconstructing decisions that were already made. Second, *acceptance* is ambiguous when the component that performs the work also declares it complete. Third, *experience* is lost when only the final artifact survives; failed branches, contaminated measurements, and useful procedures disappear with the session that produced them. Hierarchical and workflow-oriented memory systems address parts of this problem (Packer et al., 2023; Wang et al., 2024b; Xu et al., 2025). A larger context window extends session continuity; durable institutional memory additionally requires explicit state, ownership, and update rules.

We present Argus (Autonomous Research Generation and Understanding System), a general-purpose agentic runtime for long-horizon reasoning. Its central abstraction is a sequence of *bounded missions* executed against a durable project state. Four model-driven roles divide authority: a Manager anchors the objective and campaign state, a Planner selects the next units of work, an Engineer implements and evaluates them, and a Reviewer inspects artifacts and run outputs before issuing the completion verdict. These roles operate across three planes—control, execution, and records—so that scheduling, work, and record keeping remain separable even though they participate in one continuous loop.

The runtime is designed to accumulate useful experience without updating the base model. Each mission emits a trajectory and a set of reviewer-approved results. The system uses these records to update persistent memory, reusable skills, procedures, verifiers, routing, and evaluations while holding the model parameters fixed. We call this mechanism *review-gated runtime evolution*. The term *dense intelligence* describes the corresponding design goal: keep decision, execution, and verification connected over the research horizon rather than concentrating useful reasoning into isolated bursts. Section 3 formalizes this conversion and the experiments measure its operating factors.

We sharpen this design language into a process-to-capability theory. The final artifact is a projection of a richer typed trajectory; reviewed compression retains the parts needed for later decisions; and an accepted update counts as compounding only when it reduces future task risk or resource cost. This separates three claims that are often conflated: more process information is available, a review gate improves admission quality, and retained state actually helps later work.

We evaluate the resulting system across seven benchmark arenas covering software repair, GPU kernels, language-model training, training speed, research-assistant tasks, and data synthesis. SWE-Bench Pro is one row in this benchmark suite; its 731-task trajectory additionally enables analyses of Skill/Wiki evolution and Reviewer intervention. A de-duplicated inventory records 41 research artifacts across six programs as a separate breadth measure. We additionally freeze one mathematical campaign as a representative vertical trace, showing how the four roles hand off the same objective through recovery, route testing, proof production, revision, acceptance, and retained state.

This report makes five contributions:

- C1.** We formulate long-horizon reasoning as bounded missions over persistent state and derive a process-to-capability model: process-data dominance, selective review correction, counterfactual reuse value, and verified reusable yield per Token.
- C2.** We introduce a general-purpose, role-separated agentic runtime that combines durable objectives, bounded context, independent review, append-only run records, and fixed-model runtime evolution in one operational system.
- C3.** We report one unified table across seven benchmark arenas, preserving each benchmark’s backbone, backend, protocol, native metric, and reference.
- C4.** We analyze the SWE-Bench Pro row in depth: Argus reaches approximately 78% accuracy versus 59% for Direct Copilot at $1.41 \times$ aggregate Tokens; mature Waves are more efficient, and Reviewer intervention yields 34 verifier recoveries and 22 strict review-loop rescues.
- C5.** We reconstruct one mathematical campaign as a role-resolved Agent trace, making the Manager, Planner, Engineer, and Reviewer actions visible across multiple bounded missions and six accepted theorem-frontier updates.

The remainder of the report follows a conventional research-paper organization. Section 2 positions the system against prior agent and autonomous research work. Section 3 formalizes the operating problem; Section 4 presents the runtime; Sections 5 and 6 describe the evaluation protocol and results; and Sections 7–9 discuss interpretation, limitations, and conclusions. The appendix contains detailed experimental tables and notation.

2 Related Work

2.1 Autonomous Research Systems

Autonomous research systems range from tightly scoped experiment loops to complete research lifecycles. Karpathy’s *autoresearch* repeatedly modifies, trains, and evaluates a model under a fixed compute budget (Karpathy, 2026); AIDE organizes iterative code search for machine-learning improvements (Jiang et al., 2025). FunSearch and AlphaEvolve extend evaluator-guided program search to mathematical, algorithmic, and systems problems (Romera-Paredes et al., 2024; Novikov et al., 2025). These systems show how a clear objective and an executable evaluator can turn model calls into sustained search.

Full-lifecycle systems add problem selection, planning, experimentation, review, and scientific communication. The AI Scientist introduced an end-to-end research pipeline, while AI Scientist-v2 added agentic tree search and produced a workshop-accepted paper (Lu et al., 2024; Yamada et al., 2025). Agent Laboratory organizes specialized roles across the research process (Schmidgall et al., 2025), and CycleResearcher closes the loop between automated research and automated review (Weng et al., 2025). More recently, AutoSci proposed a memory-centric system spanning the complete scientific lifecycle, and FARS reported large-scale deployment of fully automated research workflows across multiple fields (Qian et al., 2026; Tang et al., 2026).

A complementary line focuses on scientific ideation and collaboration. ResearchAgent iteratively generates and reviews ideas grounded in the literature (Baek et al., 2024); SciAgents combines knowledge graphs with multi-agent reasoning for materials discovery (Ghafarollahi and Buehler, 2024); and Co-Scientist uses a multi-agent generate–debate–evolve loop for biomedical hypothesis discovery (Gottweis et al., 2025). AgentRxiv studies cumulative research through a shared repository of prior work (Schmidgall and Moor, 2025), while Arbor uses a persistent hypothesis tree and isolated executors to refine long-running research programs (Jin et al., 2026).

Argus belongs to this autonomous-research family but targets the runtime layer beneath any single scientific workflow. It maintains a durable campaign, assigns separate authority to Manager, Planner, Engineer, and Reviewer, and carries accepted results, failed routes, tools, skills, and task definitions across bounded missions. The same runtime is evaluated in software engineering, GPU optimization, model training, research tasks, data synthesis, and mathematical proof.

2.2 Long-Horizon Agent Runtimes and Memory

Tool-using agents established the basic interaction loop. Toolformer learns when to invoke external tools (Schick et al., 2023), ReAct interleaves reasoning with environment actions (Yao et al., 2023), and SWE-agent and OpenHands expose repository-scale execution through agent–computer interfaces (Yang et al., 2024; Wang et al., 2024a). These systems provide the execution substrate for long tasks; autonomous research additionally requires continuity across many sessions, experiments, and changes of direction.

Persistent-memory systems address this continuity from several angles. Generative Agents combine stored observations with reflection and retrieval (Park et al., 2023); Reflexion retains feedback across attempts (Shinn et al., 2023); Voyager accumulates executable skills (Wang et al., 2023); and MemGPT manages multiple memory tiers (Packer et al., 2023). Agent Workflow Memory induces reusable procedures from past trajectories (Wang et al., 2024b), while A-MEM organizes memories through agentic linking and retrieval (Xu et al., 2025). Argus combines these ideas with explicit ownership: execution produces candidate updates, review commits the retained form, and the complete event stream remains separate from the bounded working checkpoint.

2.3 Learning from Research Trajectories

Intermediate trajectories are also valuable training material. Process supervision can train stronger mathematical verifiers than outcome-only supervision (Lightman et al., 2023). AgentInstruct generates post-training corpora through agentic flows, Agent-FLAN studies data and tuning strategies for agent behavior, and Agent Lightning converts existing agent trajectories into reinforcement-learning transitions (Mitra et al., 2024; Chen et al., 2024; Luo et al., 2025). Test-time-compute studies further show that search and verification should be allocated according to task difficulty rather than by a fixed sampling rule (Snell et al., 2024).

The trajectories retained by Argus connect model outputs to concrete states, tool actions, measurements, artifacts, review decisions, and runtime updates. They therefore serve two purposes: coordinating the next mission online and forming a structured corpus for later supervised, preference-based, or reinforcement learning.

2.4 Evaluation of Research Agents

Software and general-agent benchmarks established repository-level issue repair and multi-environment analytical evaluation as core Agent capabilities (Jimenez et al., 2024; Liu et al., 2023; Ma et al., 2024). Research-agent benchmarks increasingly test complete research behavior rather than isolated question answering. MLE-bench packages Kaggle competitions as machine-learning engineering tasks (Chan et al., 2024); RE-Bench compares AI agents with human experts in open-ended research engineering (Wijk et al., 2024); AARRI-Bench evaluates granular tasks from the research lifecycle (Wang et al., 2026); and AIRS-Bench targets frontier research-science agents across multiple disciplines (Lupidi et al., 2026). Together they motivate evaluation in task-native units, with explicit resource accounting and trajectory-level analysis.

This report combines that benchmark view with a continuous system trace. The benchmark suite measures outcomes across seven arenas, while the SWE-Bench Pro and mathematical studies expose runtime evolution, review-driven correction, and

cross-mission research progress.

3 Problem Formulation

3.1 Dense-Intelligence Tasks

The public Argus formulation defines a *dense-intelligence task* as one that sustains high-frequency reasoning, tool use, verification, and iteration across a continuous time window until it produces a measurable result (Argus Team, 2026b). Three conditions determine whether a task has this shape:

- T1. Invention.** The answer is not directly retrievable from a manual or database; it must be discovered through search and feedback.
- T2. Long horizon.** One pass is insufficient. Progress requires many dependent iterations over hours or days.
- T3. Verifiability.** A task-native evaluator can distinguish genuine improvement from a persuasive but incorrect claim.

The defining loop is therefore proposal → execution → measurement → revised proposal. Performance engineering, security research, scientific search, and quantitative research differ in domain but share this operational structure. The task definition excludes both open-ended ideation without an evaluator and fixed workflows that require time but no new decisions.

We model a campaign by an objective o , an initial artifact y_0 , an evaluation procedure f , and a resource budget B . The artifact may be code, a model, a dataset, an experimental harness, a proof, or a manuscript. The campaign is divided into bounded missions indexed by t , each producing

$$\tau_t = (s_t, a_t, y_t, e_t, r_t), \quad (1)$$

where s_t is the mission state, a_t the actions taken, y_t the resulting artifact state, e_t the observed measurements, and r_t the review outcome. A mission must terminate, pause, or transfer control explicitly; continuity belongs to the persistent campaign state rather than an unbounded model session.

Figure 2 visualizes both horizon and density. A session-limited agent follows one sparse route and eventually spends its budget on reconstruction and repeated work. Argus instead instantiates a recurrent Manager–Planner–Engineer–Reviewer state machine inside each campaign stage. Manager-controlled holds and rollbacks reopen earlier work, while rejected branches remain available to later cycles. The resulting trajectory is therefore a spiral with local regressions rather than a one-pass or monotonically rising pipeline.

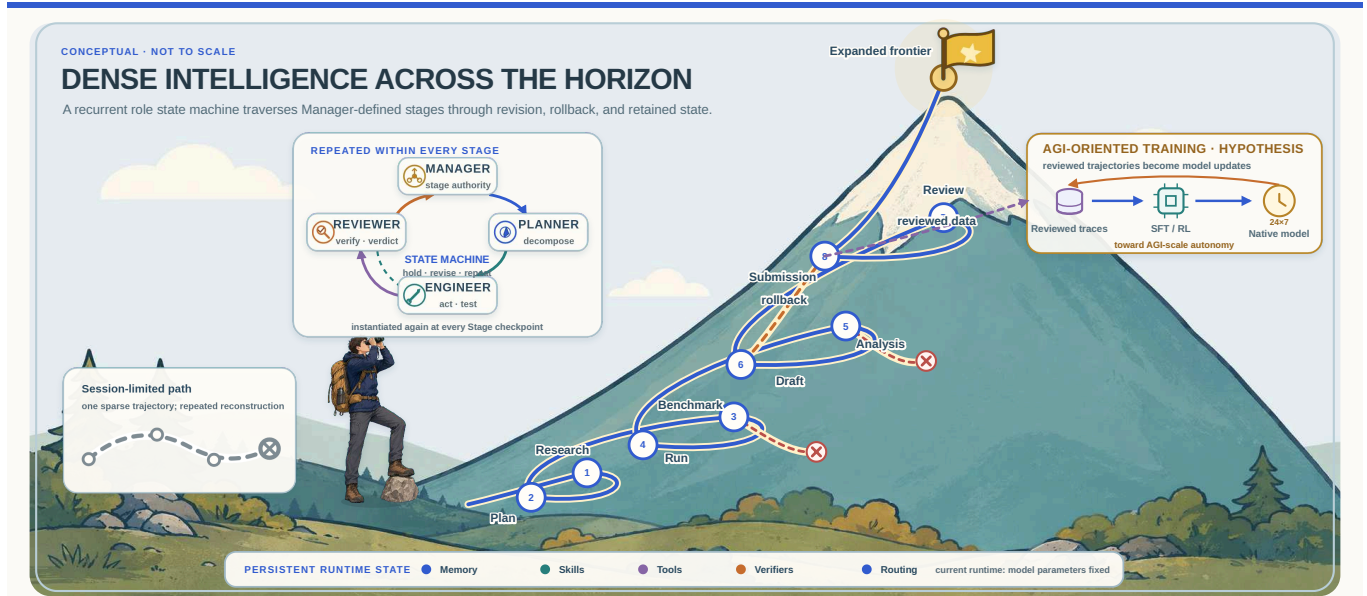


Figure 2. Conceptual view of Dense Intelligence across the effective task horizon. The four roles form a recurrent state machine instantiated inside every stage: Manager owns stage transitions, Planner decomposes work, Engineer acts and tests, and Reviewer returns a verdict that can trigger revision. The research vertical is shown with eight stages—research, plan, benchmark, run, analysis, draft, review, and submission. A binocular-equipped researcher stands on the connected foreground ridge and looks toward the golden summit flag. The sand-backed blue route follows mountain switchbacks, rising overall while including local descents; the orange dashed arrow is a rollback, and red crosses are rejected branches. The purple flow sends reviewed trajectories to a future SFT/RL flywheel whose target is native long-horizon behavior. That parameter-training panel is a research hypothesis; the current runtime keeps model parameters fixed. Geometry and height are schematic rather than empirical scales.

3.2 Role-State and Stage Dynamics

The roles are not four sequential stations that execute once. Within a stage, the campaign repeatedly applies the transition relation

$$M \rightarrow P \rightarrow E \rightleftharpoons R \rightarrow M, \quad (2)$$

where M , P , E , and R denote Manager, Planner, Engineer, and Reviewer. Reviewer continuation returns work to Engineer; an accepted or blocked verdict returns control to Manager; and a Manager hold or rollback reopens planning. The relation is an explanatory state-machine model of the implemented control flow, not a claim that every transition must invoke a fresh model session.

Let g_n be the current stage after the n th Manager decision. Legal transitions are

$$g_{n+1} \in \{g_n, \text{next}(g_n)\} \cup \text{prev}(g_n), \quad (3)$$

corresponding to hold, advance to the immediate next stage, or rollback to an earlier stage. For the research vertical, the ordered stages are research, plan, benchmark, run, analysis, draft, review, and submission. Stage index and task-native quality need not improve on every cycle: experiments can fail, review can reject a branch, and later measurements can invalidate earlier assumptions. The intended ascent is progress in the accepted frontier over many cycles, not monotonic improvement at each transition.

3.3 Dense-Intelligence Density

The website expresses useful intelligence per unit wall-clock time as

$$\rho_I(T) = \frac{1}{T} \int_0^T \dot{N}_{\text{tok}}(t) \eta_r(t) \eta_a(t) \eta_v(t) dt. \quad (4)$$

$\dot{N}_{\text{tok}}(t)$ is the instantaneous rate of token-mediated reasoning and action. The factors $\eta_r(t)$, $\eta_a(t)$, and $\eta_v(t)$ represent the fractions converted into relevant reasoning, effective action, and valid verification. The product is intentionally stricter than token throughput: a run that repeatedly reads the same state, emits activity without changing an artifact, or accepts unchecked claims can consume many tokens while contributing little to ρ_I .

Operational efficiency factors. The three factors describe how work is distributed within an audit window. For W , let $\mathcal{U}_k(W)$ be the attributable units for $k \in \{r, a, v\}$: observable reasoning segments, executed actions, or verification segments. We define

$$\eta_k(W) = \frac{\sum_{u \in \mathcal{U}_k(W)} w(u) q_k(u)}{\sum_{u \in \mathcal{U}_k(W)} w(u)}, \quad 0 \leq q_k(u) \leq 1, \quad (5)$$

where $w(u)$ is the attributable Token count for reasoning and verification, and either one action or its measured cost for action efficiency. The attribution label $q_k(u)$ records conversion into the intended function:

- **Reasoning efficiency η_r .** A direct unit derives, revises, or rules out a named claim, lemma, blocker, or decision. Repeated context, narrative transitions, and notation-only rewriting are transition cost.
- **Action efficiency η_a .** A direct action changes an artifact, result set, accepted decision, or explored branch. A falsification action is productive when it certifies a dead branch; retries and interrupted no-op work are tracked separately. State synchronization and packaging form the auxiliary action category.
- **Verification efficiency η_v .** A direct verification unit compares a named claim with an explicit criterion or artifact, reruns an independent check, identifies a concrete defect, or issues a scoped verdict. Schema repair, reformatting, and checkpoint canonicalization enable review but belong to verification overhead rather than direct checking.

We report a direct-work value and an inclusive value that also counts successful coordination and state maintenance. Equation 4 uses the three factors as a multiplicative bottleneck model. Section 6.5 measures them in the mathematical campaign, and Appendix D gives the full calculation.

3.4 Online Life and Runtime Evolution

The second website object separates model parameters from the operating state around the model:

$$\begin{aligned} H_{t+1} &= U(H_t, \tau_t, E_t), \\ \theta_{t+1} &= \theta_t. \end{aligned} \quad (6)$$

with the public state definition

$$H_t = \{\text{Memory, Skills, Tools, Verifiers, Routing}\}. \quad (7)$$

E_t is the subset of results admitted from mission t . The equality for θ is a scope condition: online evolution does not require a gradient update to the underlying model. Section 4 refines H_t into named ownership surfaces and tracks task/evaluation definitions as an additional component Q_t . The update U is partial; many missions change only memory, and some change no reusable component.

3.5 Capability-Set Expansion

Let C_t denote the effective capability set available at time t . The website writes review-gated admission and the desired breadth/depth behavior as

$$\begin{aligned} C_{t+1} &= C_t \cup \{c : \text{Verify}(c, E_t) \geq \varepsilon\}, \\ W_{t+1} &\geq W_t, & D_{t+1}(d) &\geq D_t(d). \end{aligned} \quad (8)$$

where W_t is frontier width across domains and $D_t(d)$ is depth within domain d . The inequalities define retention desiderata over validated capability. Skills can become stale, verifiers can be revised, and performance can regress on harder instances. A negative result can still add value by excluding a failed branch even when the effective capability set does not grow.

3.6 Research Value

Dense activity matters only when it produces new, valid, reusable information. The website therefore defines the accumulated research value over horizon T as

$$V_R(T) = \int_0^T \rho_I(t) \Delta I(t) p_{\text{valid}}(t) \eta_{\text{reuse}}(t) dt, \quad (9)$$

where $\Delta I(t)$ is information gain, $p_{\text{valid}}(t)$ is the probability that the claimed increment survives review, and $\eta_{\text{reuse}}(t)$ is the fraction that remains useful for later work. Equation 9 separates Token volume from the properties that make a result useful: information gain, validity, and reuse. The experiments measure these components in their native task units.

3.7 The Information Advantage of Process Data

Finally, the public formalization distinguishes the accepted artifact from the trajectory that produced it:

$$D_{\text{process}} = \{(s_k, a_k, e_k, r_k, \Delta H_k)\}_{k=1}^N \supsetneq D_{\text{final}} = \{y^*\}. \quad (10)$$

The process record contains states, actions, measurements, review feedback, and runtime-state changes, including failed branches omitted from y^* . This additional information can reduce repeated search, guide later analysis, and provide grounded material for later skill construction or evaluation. Argus retains typed, credential-redacted observations and verdicts, not private chain-of-thought transcripts.

The set inclusion in Equation 10 can be strengthened into a decision-theoretic statement. Let P denote a typed process record and let $Y = g(P)$ be its final-artifact projection. For a downstream task q with target Z_q , loss ℓ_q , and decision policy π , define the minimum achievable risk

$$\mathcal{R}_q(X) = \inf_{\pi} \mathbb{E}[\ell_q(\pi(X), Z_q)]. \quad (11)$$

Proposition 1: process-data dominance

If $Y = g(P)$, then $\mathcal{R}_q(P) \leq \mathcal{R}_q(Y)$ for every downstream decision problem q . The inequality is strict for some q whenever two process records can yield the same final artifact while implying different optimal next actions. The proof is immediate: every policy using Y can be reproduced from P by first applying g , while the reverse simulation need not exist. This is the Blackwell-information ordering specialized to a research trajectory (Blackwell, 1953).

Dominance is informational, not computational. A raw trajectory can be too large, stale, or contradictory to use efficiently. For a context budget b , the relevant object is therefore a typed compression $\psi(P)$ that trades downstream risk against retrieval and validation cost:

$$\psi_b^* = \arg \min_{\psi: \text{size}(\psi(P)) \leq b} \mathbb{E}_{q \sim \mathcal{Q}} [\mathcal{R}_q(\psi(P)) + \lambda_c C_{\text{read}}(\psi(P))]. \quad (12)$$

Equation 12 explains why an append-only event tape and a bounded reviewed checkpoint serve different purposes. The tape preserves the more informative experiment; the checkpoint approximates a decision-useful compression under a finite context budget. Failed branches belong in the compression when they change the next optimal action, not merely because they occurred.

3.8 Reusable State and Compounding Intelligence

Process data compounds only when an admitted state update improves later work. Let $H_t \oplus \Delta H_t$ denote the state after accepting mission t , and let $q_{t+1:t+K}$ be the next K tasks. We define the discounted reuse value

$$G_K(\Delta H_t) = \sum_{j=1}^K \gamma^{j-1} [\mathcal{R}_{q_{t+j}}(H_t) - \mathcal{R}_{q_{t+j}}(H_t \oplus \Delta H_t)]. \quad (13)$$

$G_K > 0$ means that the accepted memory, skill, verifier, routing rule, or certified dead branch reduces future loss under a prespecified task distribution. $G_K < 0$ captures negative transfer. This definition turns “compounding intelligence” from monotone rhetoric into a counterfactual claim: reuse must outperform a frozen state on matched future tasks. Workflow-memory experiments show that induced reusable routines can improve success and reduce steps (Wang et al., 2024b). Section 7 connects this quantity to the current Argus traces.

The website’s density and research-value equations can then be joined into a protocol-specific *verified reusable yield*:

$$\mathcal{Y}_{\text{PRI}}(W) = \frac{\sum_{t \in W} p_{\text{valid},t} [\Delta I_t + \lambda_g G_K(\Delta H_t)]}{\sum_{t \in W} N_{\text{tok},t}}. \quad (14)$$

ΔI_t is immediate task-native information gain, such as a score improvement, theorem strengthening, or certified branch elimination; $p_{\text{valid},t}$ is estimated by an external evaluator or a calibrated review procedure; and G_K measures future reuse. λ_g converts immediate and future value into one protocol-specific unit. Equation 14 connects immediate research output to future reuse. The current substitutions are reported in Appendix D.

3.9 Review as Selective Error Correction

Let C denote whether a proposed state increment is correct, A whether the Reviewer accepts it, $p = \Pr(C = 1)$ the proposal base rate, $\alpha = \Pr(A = 1 \mid C = 1)$ Reviewer sensitivity, and $\beta = \Pr(A = 1 \mid C = 0)$ false-acceptance rate. Bayes’ rule gives

$$\Pr(C = 1 \mid A = 1) = \frac{\alpha p}{\alpha p + \beta(1 - p)}. \quad (15)$$

If $\alpha > \beta$, accepted state is more precise than the proposal stream; review acts as a selective error-correction channel. Its operating point balances accepted precision, recall, and Token cost. Section 6 reports the observed repair and recovery rates.

3.10 Role-Resolved Vertical Traces

Endpoint metrics do not show how an Agent system actually conducts research. We therefore project each mission trajectory in Equation 1 onto the four role-owned actions

$$\phi(\tau_t) = (m_t, p_t, x_t, r_t, \Delta H_t), \quad (16)$$

where m_t is the Manager’s objective or stage decision, p_t is the Planner’s bounded task and dependency decision, x_t is the Engineer’s artifact-producing execution, r_t is the Reviewer’s acceptance decision, and ΔH_t is the durable state update exposed to later missions. The decomposition makes two authority constraints explicit: only the Manager changes campaign stage, and only the Reviewer admits a mission as complete. The Engineer may propose results and the Planner may propose future work, but neither can self-certify the resulting research state.

A vertical trace is useful when these tuples remain linked across many missions. It shows whether the objective survived failures, whether the Planner consumed previously accepted state, whether the Engineer changed real artifacts, whether the Reviewer rejected or redirected incomplete work, and which decisions became inputs to the next mission. This explanatory model organizes the Agent workflow; Section 6.5 applies it to one mathematical campaign.

4 Argus Runtime

4.1 System Overview

Argus is an open-source general-purpose agentic runtime (Argus Team, 2026a) built around four model-driven roles and three system planes. The *control plane* anchors the campaign and schedules work; the *execution plane* performs one bounded mission against real tools and artifacts; and the *record plane* stores what happened without deciding whether the work is scientifically complete. The distinction is operational: control owns scheduling, execution owns work and mission review, and the record plane owns the immutable record but no completion decision.

The four roles divide research authority as summarized in Table 1. The Manager spans the campaign rather than one execution round. The Planner authors future work, the Engineer performs it, and the Reviewer is the sole mission-level completion authority. The interfaces are structured objects rather than untyped prose, which makes ownership and recovery behavior explicit.

Role	Primary responsibility	Authoritative output
Manager	Commit the objective, lifetime, route, and campaign stage	Campaign division and stage transition
Planner	Decompose the current research state into bounded tasks and dependencies	Task specifications, plan status, and stage checklist updates
Engineer	Modify artifacts, invoke tools, and run experiments for one round	Execution result, artifacts, measurements, and a proposed handoff
Reviewer	Inspect artifacts and execution records; decide whether work is complete	done, continue, or blocked, plus grounded next action and retained-state edits

Table 1. Role separation in Argus. Execution belongs to the Engineer; completion belongs to the Reviewer.

Algorithm 1: Reviewed mission loop

```

Input: objective  $o$ , runtime state  $H_t$ , backlog  $B$ , budget  $b$ 
 $c \leftarrow \text{ManagerCommit}(o)$ ; persist campaign identity
while  $b$  remains and  $c$  is not complete do
   $q \leftarrow \text{Planner}(B, H_t, c)$ ; claim one bounded task
   $\tau_t \leftarrow []$ 
  repeat
     $(y, e) \leftarrow \text{Engineer}(q, H_t)$ 
     $r \leftarrow \text{Reviewer}(q, y, e)$ ; append  $(q, y, e, r)$  to  $\tau_t$ 
    if  $r = \text{continue}$  then  $q \leftarrow r.\text{next\_action}$ 
  until  $r \in \{\text{done}, \text{blocked}, \text{paused}\}$ 
   $E_t \leftarrow \text{AdmitResult}(e, r)$ 
   $H_{t+1} \leftarrow U(H_t, \tau_t, E_t)$ ; persist outcome, trace, and state
   $t \leftarrow t + 1$ ; refill  $B$  when required
end while
Output: accepted artifacts, inspectable trajectory, and updated runtime state

```

4.2 Bounded Missions over Durable State

The long-lived object in Argus is the campaign, not a provider transcript. A campaign has a persisted identity and objective; its work is divided into missions that have explicit outcomes. The outer supervisor claims one backlog item at a time, executes it, records the result, and advances only at a clean mission boundary. Atomic claims prevent two workers from taking the same item, while identity-checked resume prevents a restarted process from attaching to the wrong campaign.

Model sessions are treated as bounded caches. Engineer and Reviewer sessions can be resumed briefly to preserve useful local context, but they are rolled at explicit limits. Cross-session continuity comes from a curated checkpoint containing the goal, reviewed progress, failed approaches, the current blocker, and the next step. This follows the broader move from monolithic context toward managed memory tiers and reusable workflows (Packer et al., 2023; Wang et al., 2024b; Xu et al., 2025). The Engineer proposes the handoff; the Reviewer validates and writes the canonical checkpoint. Hard size limits keep this object focused on current state, while the full history remains in artifacts and the event record. Concrete storage layouts and roll thresholds are implementation choices around the core method.

This design makes restart and upgrade behavior part of the method. A daemon drains at a mission boundary, transfers campaign identity to a replacement process, and resumes only after checking that identity. After a crash, replay or re-claiming a mission begins from the persisted campaign rather than reconstructing it from a model transcript.

4.3 Review and Completion

Every provider call passes through one application-level gateway that assigns a call identifier, records timing and usage presence, and binds the call to the mission event stream. The Engineer and Reviewer share the mission worktree, so the Reviewer can inspect the actual artifacts and execution log rather than relying on the Engineer’s summary. A typed, append-only event tape is the canonical timeline; mutable status files and cockpit views are projections over that record.

The Reviewer is the sole source of a mission completion verdict. Completion comes from the structured verdict rather than filenames, Token volume, or keywords. The corresponding artifacts and execution records remain inspectable, while credential redaction and result provenance preserve the same completion rule.

4.4 Runtime-State Updates

Equation 6 separates the model from the state around it. Table 2 identifies how each component can change and who owns the committed update. The ownership model is intentionally not uniform. Memory and skills use a work-versus-certification split: the Engineer or Scientist produces a candidate, and the Reviewer commits the retained form. Tools remain operator-owned. Stage checklists are Planner-owned, with Reviewer feedback rather than a second commit gate. Routing is operator-sourced and Manager-committed, while task definitions are Planner-authored and scheduler-committed.

State	Change source	Commit owner	Persistent form
<i>M</i> : memory	Engineer trajectory	Reviewer	Curated checkpoint and event-derived journal
<i>S</i> : skills	Engineer / Scientist	Reviewer	Versioned skill library
<i>A</i> : tools and procedures	Operator / vertical implementation	Operator	Installed tools and stage procedures
<i>V</i> : verification	Planner	Planner	Stage checklist; Reviewer supplies feedback
<i>R</i> : routing and roles	Operator	Manager	Campaign configuration and knob store
<i>Q</i> : tasks and evaluations	Planner	Scheduler	Backlog task specifications and scopes

Table 2. Attributable ownership of fixed-model runtime evolution. A mission usually updates only a subset of these components.

Two knowledge surfaces carry reusable experience. Versioned skills store procedures that can be matched to later tasks. A project wiki stores immutable source cards derived from real Reviewer verdicts and may later synthesize source-cited pages. Neither surface is treated as automatically correct: entries can be revised, archived, or retired when later results contradict them.

4.5 Reliability and Resource Governance

Long-running systems fail through operational drift even when individual model calls are strong. Argus therefore wraps the mission loop with task-agnostic guards. The Reviewer labels whether a round produced a decision, measurement, setup only, artifact synchronization only, or no progress. Round-boundary guards stop or re-plan a mission after sustained non-decision behavior; in-round watchdogs are reserved for subprocesses that are idle or emitting activity without effective progress. These mechanisms bound execution; scientific correctness remains with the task evaluator and Reviewer.

The same gateway that records calls also enforces reservation-backed budgets. Spend is reserved before a call, reconciled afterward, and released on abort. Provider-side spend fences are derived from the reservation rather than role configuration, so a role cannot raise its own limit. Long-running external jobs are registered and monitored separately; the Engineer can explicitly wait for a healthy supervised job instead of repeatedly polling it. GPU leasing, sandboxing, daemon handoff, cockpit authentication, and numerical guard thresholds are implementation-level operational choices.

5 Empirical Methodology

We evaluate Argus across seven benchmark arenas spanning software repair, GPU-kernel optimization, language-model training, training-speed optimization, research-assistant tasks, and data synthesis. Each benchmark is reported in its native unit. SWE-Bench Pro is one benchmark in this suite; its sequential task log also enables deeper analyses of runtime evolution and Reviewer intervention.

5.1 Research Questions

RQ1: Benchmark performance. What task-native outcomes does Argus achieve across the seven benchmark arenas, and how do they compare with the reference reported for each arena?

RQ2: Self-evolution efficiency. Within the SWE-Bench Pro run, does the Token and active-time demand of mature Argus windows decrease as the shared Skill and Wiki state accumulates?

RQ3: Reviewer routing and recovery. Within the same SWE-Bench Pro run, how often is an independent Reviewer invoked, and how many initially rejected solutions are recovered after Reviewer feedback?

RQ4: Process-to-capability mechanisms. How do the retained traces quantify process-data advantage, review-gated correction, Token conversion, and cross-task reuse?

5.2 Benchmark Suite

SWE-Bench Pro evaluates repository-level software-engineering tasks with executable acceptance tests (Deng et al., 2025). The remaining arenas evaluate B200 kernel optimization, nanochat training on B200 and H100, the nanoGPT speedrun, AARRI-Bench,

and Math-Reasoning Data Synthesis from the Arbor suite (Lin et al., 2026; Karpathy, 2025, 2026; Jordan and contributors, 2025; Wang et al., 2026; Jin et al., 2026). Because rank, bits per byte, elapsed time, solve rate, and pass-gap are incompatible metrics, we do not average them into one score.

Benchmark	What the agent must do	Evaluation metric	Better
SWE-Bench Pro	Repair a real repository issue by editing production code; the submitted patch must satisfy task-specific executable acceptance tests.	Fraction of tasks resolved by the official verifier	Higher
SOL-ExecBench	Optimize real GPU kernels without changing their outputs, targeting execution close to an analytically derived hardware speed-of-light bound.	SOL score, global rank, and high placements after correctness checks	Higher
nanochat B200	Improve the nanochat training program under a fixed five-minute run on one B200 GPU.	Validation bits per byte (BPB), a compression-oriented language-model metric	Lower
nanochat H100	Solve the same five-minute nanochat training objective on one H100; it is a separate hardware-specific optimization problem.	Validation BPB under the H100 protocol	Lower
nanoGPT speedrun	Modify the training system so an eight-H100 run reaches validation loss 3.28 as quickly as possible.	Mean time to the target over ten verifier runs	Lower
AARRI-Bench	Complete 82 granular tasks representing the judgment, diligence, and professional practice expected from a research intern.	Number and percentage of tasks solved	Higher
Math-Reasoning Data	Build a pipeline that generates AIME-style reasoning problems that are difficult on the first attempt but solvable with additional attempts.	Mean pass@4 – pass@1 gap	Higher

Table 3. Definitions of the seven benchmark arenas. B200 and H100 nanochat runs are kept separate because hardware changes the optimization problem.

The six non-SWE arenas use GPT-5.5 through Codex. The SWE-Bench Pro evaluation uses GPT-5.5/xhigh through Copilot for both Direct Copilot and Argus. The full 731-task comparison reports approximate accuracy and the aggregate Token ratio

$$R_{\text{tok}} = \frac{N_{\text{Argus}}^{\text{total}}}{N_{\text{Copilot}}^{\text{total}}} \approx 1.41. \quad (17)$$

Raw Copilot Token totals and per-Wave resource traces were not retained; therefore the longitudinal analysis is Argus-only.

5.3 SWE-Bench Pro Self-Evolution Analysis

For a completed Argus Wave w with task set $\mathcal{T}_w$, we measure

$$\bar{I}_w^{\text{solve}} = \frac{1}{|\mathcal{T}_w|} \sum_{i \in \mathcal{T}_w} I_i^{\text{solve}}, \quad (18)$$

$$\bar{T}_w^{\text{agent}} = \frac{1}{|\mathcal{T}_w|} \sum_{i \in \mathcal{T}_w} T_i^{\text{agent}}. \quad (19)$$

I_i^{solve} contains the final valid Manager, Matcher, Adapter, Engineer, and invoked Reviewer calls. T_i^{agent} measures active workflow time. Queueing, environment preparation, verifier execution, infrastructure retries, and post-task maintenance are excluded.

Completed Waves are summarized by task-weighted windows: W1–6 (startup), W7–12 (early reuse), W13–18 (task-mix shift), W19–22 (mature operation), and W23–24 (hard tail). Waves 13 and 15 were deferred. The primary comparison is startup versus mature operation; the spike and hard tail remain visible.

5.4 SWE-Bench Pro Reviewer Analysis

A task is *Reviewer-invoked* when its final trajectory contains an independent Reviewer model call; otherwise it follows Engineer self-review. A Reviewer verdict of `continue` is a revision request. We report both subsequent official verifier success and the stricter case in which a later Reviewer verdict is `done`. The latter is called a *strict Reviewer rescue*.

Reviewer routing is adaptive rather than randomized. The analysis reports routing, revision, and recovery behavior over the observed task sequence.

The 41-artifact research portfolio is reported separately as a measure of research program breadth.

5.5 Representative Vertical-Trace Protocol

To complement endpoint and software-trajectory measurements, we freeze one Erdős–Gyárfás mathematical campaign as a representative vertical trace. The trace is role-led rather than theorem-led: it records what the Manager, Planner, Engineer, and Reviewer did during recovery, problem selection, route testing, proof production, revision, acceptance, and state retention. The frozen record contains one accepted route falsification and six proof-backed research deltas; detailed mathematical statements remain in the supplementary claim table.

The protocol tracks whether the runtime retains a falsified branch, carries named blockers across missions, and admits later work after artifact-based review. The frozen role trace, claim table, and figure provenance are released with the supplementary materials.

5.6 Theory-to-Measurement Mapping

We map the theory to four auditable quantities. Immediate information gain ΔI_t is represented only in task-native units: benchmark improvement, accepted theorem delta, or certified branch elimination. Review correction is represented by Reviewer `continue`–revise trajectories and later external-verifier outcomes. Reuse value G_K is approximated observationally by later Token/time demand as Skill and Wiki state accumulates. Token conversion is represented by the role- and mission-level attribution in the mathematical case. Appendix D records the corresponding substitutions in their native units.

6 Results

6.1 Benchmark Results

Table 4 is the primary empirical summary and reports all seven benchmarks in one comparison; Table 3 defines the task and metric for each row.

Benchmark	Backbone	Backend	Protocol	Argus result	Comparison
SWE-Bench Pro	GPT-5.5/xhigh	Copilot	731 software-repair tasks	$\approx 78\%$ accuracy	Direct Copilot $\approx 59\%$; $1.41 \times$ aggregate Tokens
SOL-ExecBench	GPT-5.5	Codex	B200; 101 kernels	Global #6; $2 \times \#1$; 7 top-3	Two head-to-head wins over Recursive
nanochat B200	GPT-5.5	Codex	5 min; $1 \times \text{B200}$	0.9636 BPB	Human SOTA 0.9646
nanochat H100	GPT-5.5	Codex	5 min; $1 \times \text{H100}$	0.9855 BPB	Human SOTA 0.9879
nanoGPT speedrun	GPT-5.5	Codex	$8 \times \text{H100}$; $N=10$	79.77 s	Same-device human 80.18 s
AARRI-Bench	GPT-5.5	Codex	82 research-intern tasks	63/82 (76.8%)	Paper best 68.3%
Math-Reasoning Data	GPT-5.5	Codex	AIME-style synthesis	28.0 gap	Arbor 20.83; Claude 8.33; Codex 6.25

Table 4. Results across seven benchmark arenas. Values remain in task-native units and are not cross-normalized. Backbone denotes the model driving the research agent; Backend denotes the execution surface.


The table shows one runtime reaching competitive outcomes across heterogeneous tasks. The remainder of this section analyzes the SWE-Bench Pro row because it provides a long sequential trajectory and Reviewer decisions.

6.2 SWE-Bench Pro Analysis: Self-Evolution Efficiency

Figure 3 shows the Argus-only longitudinal trajectory. Mature operation W19–22 uses 21% fewer solve input tokens and 15% less active workflow time per task than startup W1–6. The lowest-Token window, W13–18, reaches a 50% reduction from startup but requires more active time because its task mix contains slower executions. The final hard-tail window rebounds in both metrics.

SWE-Bench Pro: accuracy gain and runtime convergence

One continuous 731-task evaluation · GPT-5.5/xhigh · Skill and Wiki state updated throughout the run

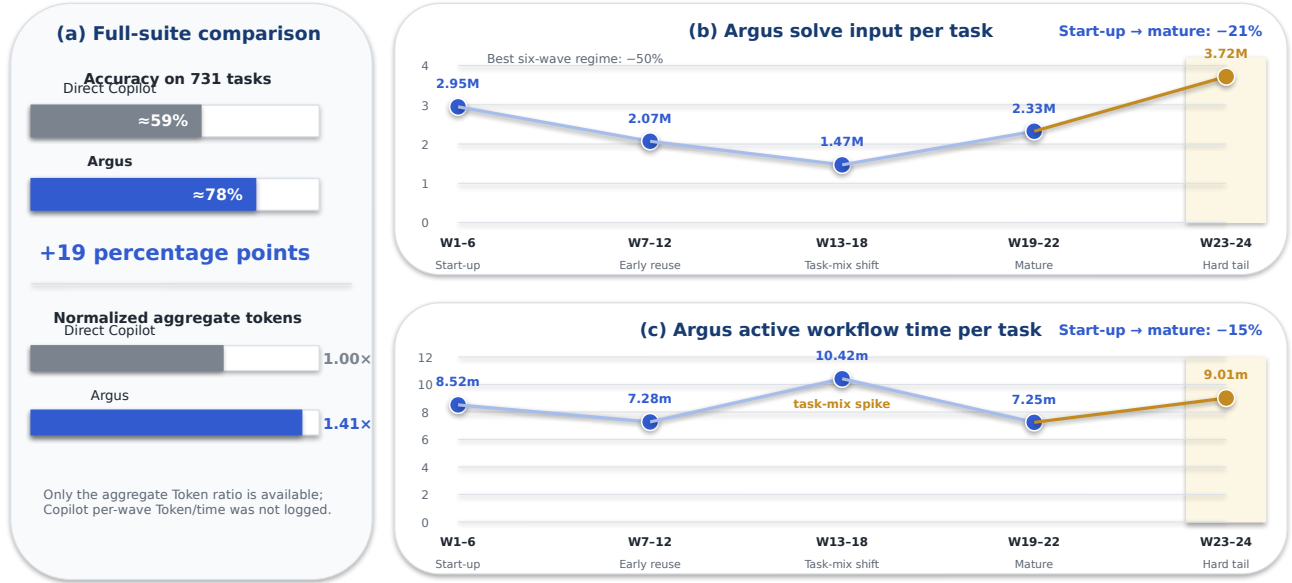

Task-weighted window means. W13 and W15 were deferred; W23-24 are retained as hard-tail stress. Queue, workspace/container, verifier, infrastructure-retry, and post-task maintenance time are excluded.

Figure 3. Analysis of the SWE-Bench Pro result. The left panel repeats the full-suite comparison; the right panels aggregate Argus Token and active time over approximately six-Wave windows. The task-mix spike and hard tail are retained. Copilot per-Wave resource traces are unavailable.


The curve shows a lower-cost mature operating window together with a visible task-mix spike and hard tail.

6.3 SWE-Bench Pro Analysis: Reviewer Ablation and Recovery

Of 731 tasks, 466 (63.7%) invoke an independent Reviewer, while 265 (36.3%) use Engineer self-review. The Reviewer requests another implementation round on 43 tasks. After revision, 34 pass the official verifier and 22 complete the strict `continue`→`revision`→`done` loop.

Reviewer routing and recovery across 731 tasks

Mechanism analysis from final-valid trajectories · adaptive routing, not randomized ablation

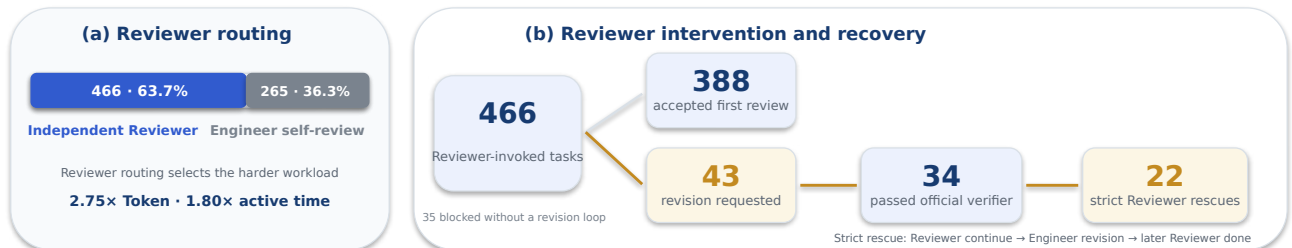

Group-level accuracy is intentionally omitted: Reviewer routing is conditional on task difficulty.

Figure 4. Reviewer routing and recovery on SWE-Bench Pro. The strict rescue count records tasks rejected after the initial Engineer attempt and later accepted after Reviewer feedback and another implementation round. Routing is adaptive rather than randomized.

Reviewer-routed tasks consume $2.75\times$ as many solve input tokens and $1.80\times$ as much active time as self-reviewed tasks on average, indicating that the routing policy selects a harder workload. The recovery funnel is therefore more interpretable than a raw group-accuracy comparison.

6.4 Measured Process Quantities

The process theory is instantiated from two complementary traces. In the mathematical campaign, direct reasoning, verification, and action each account for approximately 56% of their respective audited units. In SWE-Bench Pro, Reviewer revision requests lead to 79.1% official-verifier recovery and 51.2% strict review-loop rescue, while the mature window uses 21% fewer solve input Tokens and 15% less active time than startup. Appendix D gives the complete substitutions for the density, reuse, yield, and

compression quantities.

The public research inventory additionally contains 41 de-duplicated artifacts across six programs, illustrating the range of research programs executed by the same runtime.

6.5 Representative Vertical Agent Trace

Figure 5 shows how the four roles cooperate inside one real mathematical campaign. The case begins with an open-ended operator goal. The Manager preserves that goal through budget and process failures; the Planner turns the current reviewed state into bounded work; the Engineer retrieves sources, runs tools, and writes research artifacts; and the Reviewer decides whether the work is accepted, revised, or blocked before it can enter durable state.

REPRESENTATIVE VERTICAL RUN · REAL CAMPAIGN TRACE

How four Argus roles turn an open-ended goal into reviewed progress

The math is one output. The trace shows the Agent workflow that plans, executes, rejects, repairs, accepts, and retains it.

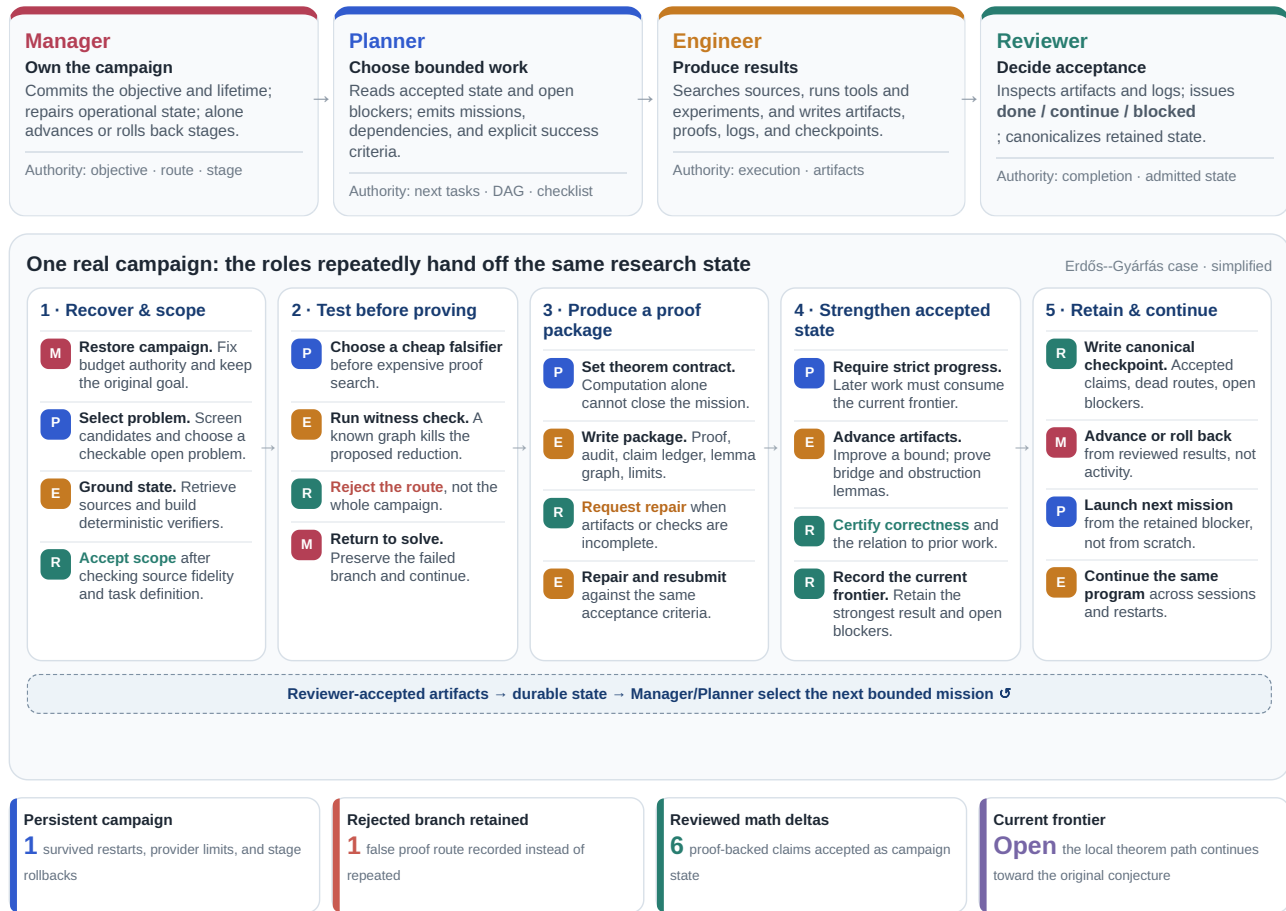


Figure 5. Role-resolved execution of one vertical research campaign. Panel A states the four authorities. Panel B follows the same campaign through recovery, scope, route testing, proof production, revision, strengthening, and retained state. Bottom cards summarize the mathematical outputs accumulated by the campaign.

The trace makes the work allocation concrete. The Manager recovers the campaign and owns stage transitions. The Planner first selects a cheap falsification test, then changes the success contract from “collect observations” to “produce a proof,” and later requires new missions to advance the retained result rather than restart from an easier fact. The Engineer performs the domain work—source retrieval, executable checks, proof writing, and result packaging. The Reviewer rejects an overstated route, requests the missing checks, and certifies the bounded theorem recorded by the artifacts.

At the frozen point, the campaign retains one falsified route and six proof-backed deltas, including one stricter bound and two bridge results. Accepted work changes the next Planner input, rejected work remains available as a dead branch, and open blockers become explicit future tasks. The trace therefore captures a continuous research path rather than a sequence of isolated answers.

6.6 Efficiency Attribution in the Mathematical Case

We apply Equation 5 to the theorem-production window covering Rounds 12–17, with telemetry cut off at July 18, 2026, 08:41 UTC. The audit contains 18 bounded missions: six changed the theorem frontier, four directly checked or re-certified mathematical results, seven synchronized review/venue state, and one overlap-audit mission was interrupted without an admitted result. Table 5 uses mission purpose as a coarse attribution rule for process allocation.

Efficiency view	Direct	Auxiliary	Failed/no-op	Unit and interpretation
Reasoning	56.0%	39.1%	4.9%	Engineer reasoning-output Tokens; direct means a frontier-changing proof mission.
Verification	55.4%	35.0%	9.6%	Reviewer reasoning-output Tokens; direct means proof comparison or re-certification.
Action	55.6%	38.9%	5.6%	Mission count; direct comprises six frontier missions and four verification missions.

Table 5. Efficiency attribution for the representative mathematical case. Auxiliary work includes result packaging, canonical state, and venue/profile synchronization.

The normalized interpretation is concrete. Of every 100 Engineer reasoning-output Tokens, approximately 56 occurred in frontier-changing proof missions, 39 in verification or state-maintenance work, and 5 in the interrupted branch. Of every 100 Reviewer reasoning-output Tokens, approximately 55 directly checked a proof package, 35 maintained formal review state, and 10 were spent in the interrupted audit. The strict action score is $10/18 = 55.6\%$; if the seven successful auxiliary missions are also credited, the inclusive score is $17/18 = 94.4\%$. Cost weighting makes the interruption more visible: the strict and inclusive action scores become 56.1% and 89.7%, respectively.

The trace also clarifies what the numerator should reward. The early witness check that killed a proposed reduction counts as an efficient action because it pruned a false route before a long proof attempt. In Round 15, selecting one internal triple, deriving the degree bounds, and closing the counting inequality are direct reasoning; rewriting the result into the claim ledger is auxiliary work. Reviewer inspection of those steps is direct verification, whereas canonicalizing the checkpoint is verification overhead. This separation prevents activity volume from being mistaken for research progress while preserving necessary coordination as a visible cost.

7 Analysis and Discussion

7.1 System-Level Performance

The seven-benchmark suite shows one runtime operating across software repair, GPU-kernel optimization, model training, research tasks, data synthesis, and mathematical proof. On SWE-Bench Pro, Argus reaches approximately 78% accuracy compared with 59% for Direct Copilot at $1.41\times$ aggregate Tokens. The comparison pairs additional computation for planning, execution, and review with a 19-point accuracy difference.

The longitudinal run shows how this cost changes with accumulated state. Mature W19–22 uses 21% fewer solve input Tokens and 15% less active time per task than startup W1–6. The curve remains non-monotone: W13–18 combines low Token use with longer execution, while W23–24 forms a hard tail. The operating profile changes over time as shared state expands, while task-dependent variation remains visible.

7.2 Reviewer as Selective Error Correction

The Reviewer requests revision on 43 SWE-Bench Pro tasks. After another Engineer round, 34 pass the official verifier and 22 complete the stricter `continue`→`revision`→`done` loop. These trajectories show the Reviewer functioning as an error-correction stage rather than a terminal commentary layer.

Reviewer routing is adaptive: Reviewer-routed tasks use more Tokens and active time than self-reviewed tasks. The observed routing concentrates independent review on the more resource-intensive part of the workload.

7.3 Persistent State and Process Data

The long-lived object in Argus is the campaign state rather than a provider transcript. Accepted results, failed routes, tools, skills, and current blockers remain available after session rolls and daemon restarts. Equation 10 formalizes the information advantage of this record, while Equation 12 explains why the runtime keeps both a complete event history and a bounded working checkpoint.

This mechanism gives concrete meaning to *compounding intelligence*. The base model remains fixed, but each accepted mission changes the starting point of later work. The SWE-Bench Pro trajectory measures the resource profile across this accumulation, and the mathematical campaign shows later theorem missions consuming earlier definitions, bounds, rejected routes, and bridge lemmas.

7.4 From Runtime Learning to Model Training

The same trajectories can be transformed into supervised examples, preference pairs, and reinforcement-learning transitions. AgentInstruct, Agent-FLAN, and Agent Lightning provide complementary mechanisms for this conversion (Mitra et al., 2024; Chen et al., 2024; Luo et al., 2025). Argus contributes a structured source stream linking objectives, tool actions, measurements,

revisions, and retained-state updates. A future training stage can use this stream to internalize recurring planning and verification patterns while the runtime continues to provide long-horizon coordination.

7.5 Vertical Research in Mathematics

The Erdős–Gyárfás campaign exposes the four-role organization at research depth. The Manager preserves the objective and stage, the Planner converts the current frontier into bounded theorem tasks, the Engineer produces proofs and computational checks, and the Reviewer controls admission into durable state.

The campaign retains one falsified route and six accepted theorem-frontier updates. Later missions improve a bound and close two graph-realizability gaps by starting from the reviewed ledger rather than restarting from the original conjecture. This is the same runtime mechanism seen in software repair, applied to a domain where progress is expressed through definitions, lemmas, counterexamples, and proofs.

7.6 Connecting Theory and Results

Table 6 connects the process-to-capability model to the measurements reported in Sections 6 and 6.5.

Theory component	Measurement	Observed result	Interpretation
Process-data dominance	Frozen mathematical trajectory	One dead route and six dependent theorem updates	The retained process changes the starting state of later missions.
Review gate	43 Reviewer revision requests	34 verifier recoveries; 22 strict rescues	Independent review redirects initially unacceptable work into another implementation round.
Reuse value G_K	Startup W1–6 versus mature W19–22	21% fewer solve input Tokens; 15% less active time	Later operation reaches a lower resource regime while shared state expands.
Token conversion	Rounds 12–17 role attribution	56.0% reasoning, 55.4% verification, and 55.6% action direct shares	The research trace separates frontier work, coordination, and interrupted work.

Table 6. Connection between the process-to-capability theory and measured system behavior. Detailed substitutions appear in Appendix D.

8 Limitations and Future Work

Attribution and task sequence. The SWE-Bench Pro experiment compares the complete Argus runtime with Direct Copilot. Reviewer routing is adaptive, the 22 Waves follow one task order, and per-Wave Direct-Copilot Token/time records are unavailable. The current results therefore characterize whole-system behavior over this sequence. Matched frozen-state runs, randomized task orders, and randomized review routing will separate the contributions of persistent state, role separation, and review.

Generality across models, domains, and evaluators. The seven benchmark arenas use different metrics, hardware, and execution protocols, while the mathematical analysis follows one vertical campaign. Results are interpreted in their native units rather than combined into a universal score. Repeated campaigns, additional backbones, and external domain review will measure how the runtime transfers across task families and research standards.

Metric calibration and model transfer. The efficiency analysis labels whole role calls by mission purpose; finer segment labels would sharpen the reasoning, action, and verification factors. Reviewer sensitivity and false-acceptance rate require randomized routing with an external verifier, and the counterfactual reuse value G_K requires paired future tasks with and without a state update. The runtime-to-model path is currently a training direction: held-out trajectory splits and scaffold-removal studies will measure how much of the long-horizon control loop can be internalized by the model.

9 Conclusion

Argus is a general-purpose agentic runtime for sustained research across bounded missions. Persistent campaign state, four-role authority separation, and review-gated updates allow one objective to continue across model calls, tool runs, revisions, and restarts. Across seven benchmark arenas, the runtime reaches strong task-native results; on SWE-Bench Pro it attains approximately 78% accuracy versus 59% for Direct Copilot at $1.41 \times$ aggregate Tokens. Mature operation uses 21% fewer solve input Tokens and 15% less active time than startup, while Reviewer intervention produces 34 verifier recoveries and 22 strict review-loop rescues.

The process-to-capability theory explains how this runtime converts Token activity into retained research progress. Typed trajectories contain more decision-relevant information than final artifacts alone, review separates proposal from admission, and reuse changes the starting point of future missions. The mathematical campaign makes this mechanism visible through one rejected route and six accepted theorem-frontier updates produced by the Manager, Planner, Engineer, and Reviewer.

These trajectories also define a natural interface to model training. Supervised, preference-based, and reinforcement-learning methods can use the accumulated objectives, actions, measurements, revisions, and state transitions to internalize parts of the long-horizon research loop.

A Detailed SWE-Bench Pro Results

The main text reports the startup-to-mature comparison. Table 7 shows every analysis window, including the task-mix spike and hard tail.

Window	Interpretation	Tasks	Input/task	Active min/task	Token index
W1–6	Startup	120	2.95M	8.52	100
W7–12	Early reuse	140	2.07M	7.28	70
W13–18	Task-mix shift	151	1.47M	10.42	50
W19–22	Mature	158	2.33M	7.25	79
W23–24	Hard tail	49	3.72M	9.01	126

Table 7. Task-weighted Argus window statistics. Token index normalizes W1–6 to 100.

Wave	Tasks	Solve input/task	Agent s/task	Skills	Wiki
1	20	2.839M	545.6	34	27
2	20	3.263M	642.6	54	41
3	20	3.609M	569.6	68	52
4	20	2.908M	490.7	89	64
5	20	2.832M	452.0	106	81
6	20	2.246M	366.8	127	94
7	20	2.564M	519.8	148	101
8	20	2.882M	465.8	168	115
9	20	2.615M	394.2	190	129
10	20	2.204M	377.1	208	143
11	20	2.041M	396.9	225	155
12	40	1.099M	451.5	260	171
14	32	1.327M	527.0	290	191
16	39	1.564M	623.1	305	206
17	40	1.537M	668.5	306	219
18	40	1.432M	662.8	333	237
19	40	2.424M	431.0	365	258
20	40	2.129M	400.5	404	284
21	39	2.165M	427.9	413	305
22	39	2.593M	481.3	434	323
23	38	3.873M	565.6	471	345
24	11	3.186M	455.4	478	352

Table 8. All completed Argus Wave summaries used in the longitudinal analysis. Waves 13 and 15 were deferred.

B Reviewer Intervention Details

Table 9 separates routing decisions from recovery outcomes. The first three rows partition the independent-Reviewer trajectories; the final two rows measure recovery after a revision request.

Reviewer mechanism event	Tasks	Interpretation
Independent Reviewer invoked	466	63.7% of 731
Engineer self-review	265	36.3% of 731
Accepted on first external review	388	terminal done
Blocked on first external review	35	terminal blocked
External Reviewer requested revision	43	at least one continue
Official verifier success after revision	34	79.1% of revision requests
Strict review-loop rescue	22	51.2% of revision requests

Table 9. Reviewer routing and recovery. Strict rescue requires an external Reviewer **continue** followed by a later Reviewer **done**.

C Representative Vertical Trace Details

Table 10 expands the role handoffs summarized in Figure 5. The table deliberately foregrounds Agent authority and durable outputs rather than the mathematical statements.

Phase	Manager / Planner	Engineer	Reviewer	Durable output
Recover and scope	Manager restores the campaign; Planner screens candidate problems.	Grounds sources and creates deterministic checks.	Verifies problem fidelity and accepts the scoped objective.	Persistent objective, selected problem, initial claim ledger.
Test a route	Planner chooses the cheapest decisive falsification mission.	Runs the witness verifier and records the failed reduction.	Accepts the negative result and fixes its scope.	Certified dead branch and revised next action.
Produce proof package	Planner requires theorem, proof, and verification artifacts.	Writes proof, audits, claim ledger, lemma graph, and checkpoint.	Returns continue when checks are incomplete, then rechecks.	Reviewer-accepted bounded result package.
Strengthen	Planner requires later work to consume and advance retained state.	Improves one result and proves bridge/obstruction lemmas.	Checks correctness, strict progress, and claim boundaries.	Updated accepted state plus named remaining blockers.
Continue	Manager advances or rolls back from the verdict; Planner selects the next blocker.	Starts the next mission from retained artifacts.	Updates the frontier status and next blockers.	Inspectable event trace and reusable cross-session state.

Table 10. Role-resolved phases in the frozen Erdős–Gyárfás campaign. The table follows how each role changes the shared research state.

The supplementary trace bundle contains the frozen role/claim table, calculation map, HTML figure source, figure brief, and provenance. The source campaign retains the complete artifacts and event stream.

Representative proof artifact (abridged)

For fixed roots x, y , let $\mathcal{P}_4(x, y)$ be the length-4 paths from x to y , and let $\mathcal{F}$ be their internal three-vertex sets. In a graph with no C_8 , any two members of $\mathcal{F}$ intersect: two paths with disjoint internal vertices would join to form an 8-cycle. A separate no- C_4 case analysis shows that any fixed pair of internal vertices occurs in at most three path sets.

Assume that the path family has no common internal blocker. Choose $E = \{a, b, c\} \in \mathcal{F}$. For each $t \in E$, some member E_t omits t . Every set containing t must meet the three vertices of E_t ; the pair-occurrence bound therefore gives $d(t) \leq 9$. Hence

$$d(a) + d(b) + d(c) \leq 27.$$

Every member of $\mathcal{F}$ meets E , while E itself contributes three incidences rather than one, so

$$|\mathcal{F}| + 2 \leq d(a) + d(b) + d(c) \leq 27.$$

Thus $|\mathcal{P}_4(x, y)| = |\mathcal{F}| \leq 25$: the paths share a common internal blocker or there are at most 25 of them. This excerpt illustrates the kind of proof artifact produced and reviewed by the workflow; the complete case analysis and computational checks remain in the source bundle.

D Process-Theory Calculations

Table 11 records the complete substitutions behind the process quantities summarized in the main text. The mathematical window contains 332,274 reasoning-output Tokens over 9,620.5 active seconds. The strict and inclusive density values use the two attribution policies defined in Equation 5. The process-compression row is a separate operational snapshot taken at 2026-07-18 10:18:56 UTC.

Theory quantity	Data substitution	Observed value	Interpretation
Strict $\hat{\rho}_I$	$332,274/9,620.5 \times 0.5598 \times 0.5556 \times 0.5538$	5.95 effective Token-eq./s	Direct reasoning, action, and verification only.
Inclusive $\hat{\rho}_I$	$332,274/9,620.5 \times 0.9512 \times 0.9444 \times 0.9043$	28.06 effective Token-eq./s	Includes successful coordination and state-maintenance work.
Reviewer correction	34/43 verifier recoveries; 22/43 strict rescues	79.1%; 51.2%	Post-revision outcomes on SWE-Bench Pro.
Reuse quantity G_K	$(2.95 - 2.33)\text{M Tokens/task}; (8.52 - 7.25) \text{ min/task}$	0.62M Tokens and 1.27 min per task	Startup–mature difference in the longitudinal run.
Immediate $\widehat{\mathcal{P}}_{\text{PRI}}$	$\lambda_g = 0; 6/332,274 \times 10^6$	18.1 accepted deltas/M reasoning Tokens	Six accepted theorem-frontier updates in Rounds 12–17.
Process compression	384,370,463/3,240 bytes	$118,633 \times$ raw-tape/checkpoint ratio	Event history relative to the active working checkpoint.

Table 11. Detailed calculation of the process-theory quantities. Values retain their task-specific units; the main text reports the corresponding system-level patterns.

E Notation

Symbol	Meaning
o, y_0, f, B	Objective, initial artifact, evaluator, and resource budget
τ_t	Mission trajectory $(s_t, a_t, y_t, e_t, r_t)$
H_t	Persistent runtime state
E_t	Results admitted after mission t
θ_t	Underlying model parameters, fixed in this report
C_t	Effective retained capability set
$\phi(\tau_t)$	Role-resolved mission trace $(m_t, p_t, x_t, r_t, \Delta H_t)$
$\rho_I(T)$	Dense-intelligence density over horizon T
η_r, η_a, η_v	Measured reasoning, action, and verification efficiency factors
$\mathcal{R}_q(X)$	Minimum downstream decision risk when observing X
Ψ_b^*	Decision-useful process compression under context budget b
$G_K(\Delta H_t)$	Discounted counterfactual reuse value over K future tasks
$\mathcal{P}_{\text{PRI}}(W)$	Verified reusable process-intelligence yield per Token
α, β	Reviewer sensitivity and false-acceptance rate
$V_R(T)$	Conceptual accumulated research value
R_{tok}	Aggregate Argus-to-Direct-Copilot Token ratio
$\bar{I}_w^{\text{solve}}$	Mean solve input tokens in Wave w
$\bar{T}_w^{\text{agent}}$	Mean active workflow time in Wave w

Table 12. Notation used in the report.

Machine-readable aggregates and editable figure sources are released with the report. They are kept outside the narrative so that implementation metadata does not obscure the scientific results.

References

- Argus Team. argus-skill: A 7×24 system for long-horizon autonomous research. GitHub repository, 2026a. URL <https://github.com/lbx154/argus-skill>.
- Argus Team. Argus: A self-evolving research agent. Project website, 2026b. URL <https://argusbot.cn/>.
- Jinheon Baek, Sujay Kumar Jauhar, Silviu Cucerzan, and Sung Ju Hwang. ResearchAgent: Iterative research idea generation over scientific literature with large language models. *arXiv preprint arXiv:2404.07738*, 2024. URL <https://arxiv.org/abs/2404.07738>.
- David Blackwell. Equivalent comparisons of experiments. *The Annals of Mathematical Statistics*, 24(2):265–272, 1953. doi: 10.1214/aoms/1177729032. URL <https://doi.org/10.1214/aoms/1177729032>.
- Jun Shern Chan, Neil Chowdhury, Oliver Jaffe, et al. MLE-bench: Evaluating machine learning agents on machine learning engineering. *arXiv preprint arXiv:2410.07095*, 2024. URL <https://arxiv.org/abs/2410.07095>.
- Zehui Chen, Kuikun Liu, Qiuchen Wang, Wenwei Zhang, Jiangning Liu, Dahua Lin, Kai Chen, and Feng Zhao. Agent-FLAN: Designing data and methods of effective agent tuning for large language models. *arXiv preprint arXiv:2403.12881*, 2024. URL <https://arxiv.org/abs/2403.12881>.

- Xiang Deng, Jeff Da, Edwin Pan, Yannis Yiming He, Charles Ide, Kanak Garg, Niklas Lauffer, Andrew Park, Nitin Pasari, Chetan Rane, Karmini Sampath, Maya Krishnan, Srivatsa Kundurthy, Sean Hendryx, Zifan Wang, Chen Bo Calvin Zhang, Noah Jacobson, Bing Liu, and Brad Kenstler. SWE-Bench Pro: Can AI agents solve long-horizon software engineering tasks? *arXiv preprint arXiv:2509.16941*, 2025.
- Alireza Ghafarollahi and Markus J. Buehler. SciAgents: Automating scientific discovery through multi-agent intelligent graph reasoning. *arXiv preprint arXiv:2409.05556*, 2024. URL <https://arxiv.org/abs/2409.05556>.
- Juraj Gottweis, Wei-Hung Weng, Alexander Daryin, et al. Accelerating scientific discovery with co-scientist. *arXiv preprint arXiv:2502.18864*, 2025. URL <https://arxiv.org/abs/2502.18864>.
- Zhengyao Jiang, Dominik Schmidt, Dhruv Srikanth, et al. AIDE: AI-driven exploration in the space of code. *arXiv preprint arXiv:2502.13138*, 2025. URL <https://arxiv.org/abs/2502.13138>.
- Carlos E. Jimenez, John Yang, Alexander Wettig, et al. SWE-bench: Can language models resolve real-world GitHub issues? *arXiv preprint arXiv:2310.06770*, 2024. URL <https://arxiv.org/abs/2310.06770>.
- Jiajie Jin, Yuyang Hu, Kai Qiu, Qi Dai, Chong Luo, et al. Toward generalist autonomous research via hypothesis-tree refinement. *arXiv preprint arXiv:2606.11926*, 2026. URL <https://arxiv.org/abs/2606.11926>.
- Keller Jordan and contributors. NanoGPT-Bench: Nanogpt training speedrun benchmark. GitHub repository, 2025. URL <https://github.com/KellerJordan/modded-nanogpt>.
- Andrej Karpathy. nanochat: The best ChatGPT that \$100 can buy. GitHub repository, 2025. URL <https://github.com/karpathy/nanochat>.
- Andrej Karpathy. autoresearch: AI agents running research on single-GPU nanochat training automatically. GitHub repository, 2026. URL <https://github.com/karpathy/autoresearch>.
- Thomas Kwa, Ben West, Joel Becker, et al. Measuring AI ability to complete long software tasks. *arXiv preprint arXiv:2503.14499*, 2025. URL <https://arxiv.org/abs/2503.14499>.
- Hunter Lightman, Vineet Kosaraju, Yura Burda, Harri Edwards, Bowen Baker, Teddy Lee, Jan Leike, John Schulman, Ilya Sutskever, and Karl Cobbe. Let’s verify step by step. *arXiv preprint arXiv:2305.20050*, 2023. URL <https://arxiv.org/abs/2305.20050>.
- Edward Lin, Sahil Modi, Siva Kumar Sastry Hari, et al. SOL-ExecBench: Speed-of-light benchmarking for real-world GPU kernels against hardware limits. *arXiv preprint arXiv:2603.19173*, 2026. URL <https://arxiv.org/abs/2603.19173>.
- Xiao Liu, Hao Yu, Hanchen Zhang, et al. AgentBench: Evaluating LLMs as agents. *arXiv preprint arXiv:2308.03688*, 2023. URL <https://arxiv.org/abs/2308.03688>.
- Chris Lu et al. The AI scientist: Towards fully automated open-ended scientific discovery. *arXiv preprint arXiv:2408.06292*, 2024. URL <https://arxiv.org/abs/2408.06292>.
- Xufang Luo, Yuge Zhang, Zhiyuan He, Zilong Wang, Siyun Zhao, Dongsheng Li, Luna K. Qiu, and Yuqing Yang. Agent lightning: Train any AI agents with reinforcement learning. *arXiv preprint arXiv:2508.03680*, 2025. URL <https://arxiv.org/abs/2508.03680>.
- Alisia Lupidi, Bhavul Gauri, Thomas Simon Foster, et al. AIRS-Bench: A suite of tasks for frontier AI research science agents. *arXiv preprint arXiv:2602.06855*, 2026. URL <https://arxiv.org/abs/2602.06855>.
- Chang Ma, Junlei Zhang, Zhihao Zhu, et al. AgentBoard: An analytical evaluation board of multi-turn LLM agents. *arXiv preprint arXiv:2401.13178*, 2024. URL <https://arxiv.org/abs/2401.13178>.
- Arindam Mitra, Luciano Del Corro, Guoqing Zheng, Shweti Mahajan, Dany Rouhana, Andres Cudas, et al. AgentInstruct: Toward generative teaching with agentic flows. *arXiv preprint arXiv:2407.03502*, 2024. URL <https://arxiv.org/abs/2407.03502>.
- Alexander Novikov, Ngan Vũ, Marvin Eisenberger, et al. AlphaEvolve: A coding agent for scientific and algorithmic discovery. *arXiv preprint arXiv:2506.13131*, 2025. URL <https://arxiv.org/abs/2506.13131>.
- Charles Packer, Sarah Wooders, Kevin Lin, et al. MemGPT: Towards LLMs as operating systems. *arXiv preprint arXiv:2310.08560*, 2023. URL <https://arxiv.org/abs/2310.08560>.
- Joon Sung Park, Joseph C. O’Brien, Carrie J. Cai, et al. Generative agents: Interactive simulacra of human behavior. *arXiv preprint arXiv:2304.03442*, 2023. URL <https://arxiv.org/abs/2304.03442>.

- Weitong Qian, Beicheng Xu, Zhongao Xie, et al. AutoSci: A memory-centric agentic system for the full scientific research lifecycle. *arXiv preprint arXiv:2605.31468*, 2026. URL <https://arxiv.org/abs/2605.31468>.
- Bernardino Romera-Paredes, Mohammadamin Barekatain, Alexander Novikov, et al. Mathematical discoveries from program search with large language models. *Nature*, 625:468–475, 2024. doi: 10.1038/s41586-023-06924-6. URL <https://doi.org/10.1038/s41586-023-06924-6>.
- Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, et al. Toolformer: Language models can teach themselves to use tools. *arXiv preprint arXiv:2302.04761*, 2023. URL <https://arxiv.org/abs/2302.04761>.
- Samuel Schmidgall and Michael Moor. AgentRxiv: Towards collaborative autonomous research. *arXiv preprint arXiv:2503.18102*, 2025. URL <https://arxiv.org/abs/2503.18102>.
- Samuel Schmidgall, Yusheng Su, Ze Wang, et al. Agent laboratory: Using LLM agents as research assistants. *arXiv preprint arXiv:2501.04227*, 2025. URL <https://arxiv.org/abs/2501.04227>.
- Noah Shinn et al. Reflexion: Language agents with verbal reinforcement learning. *arXiv preprint arXiv:2303.11366*, 2023. URL <https://arxiv.org/abs/2303.11366>.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling LLM test-time compute optimally can be more effective than scaling model parameters. *arXiv preprint arXiv:2408.03314*, 2024. URL <https://arxiv.org/abs/2408.03314>.
- Qiong Tang, Tianxiang Sun, Xiangkun Hu, et al. FARS: A fully automated research system deployed at scale. *arXiv preprint arXiv:2606.31651*, 2026. URL <https://arxiv.org/abs/2606.31651>.
- Guanzhi Wang et al. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023. URL <https://arxiv.org/abs/2305.16291>.
- Jiayu Wang, Weijiang Lv, Bowen Fu, et al. Act as a real researcher: A suite of benchmarks evaluating frontier LLMs and agentic harnesses in research lifecycle. *arXiv preprint arXiv:2606.07462*, 2026. URL <https://arxiv.org/abs/2606.07462>.
- Xingyao Wang, Boxuan Li, Yufan Song, et al. OpenHands: An open platform for AI software developers as generalist agents. *arXiv preprint arXiv:2407.16741*, 2024a. URL <https://arxiv.org/abs/2407.16741>.
- Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. *arXiv preprint arXiv:2409.07429*, 2024b. URL <https://arxiv.org/abs/2409.07429>.
- Yixuan Weng, Minjun Zhu, Guangsheng Bao, Hongbo Zhang, Jindong Wang, Yue Zhang, and Linyi Yang. CycleResearcher: Improving automated research via automated review. In *International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=bjcsVLoHYs>.
- Hjalmar Wijk, Tao Lin, Joel Becker, et al. RE-Bench: Evaluating frontier AI R&D capabilities of language model agents against human experts. *arXiv preprint arXiv:2411.15114*, 2024. URL <https://arxiv.org/abs/2411.15114>.
- Wujiang Xu, Zujie Liang, Kai Mei, et al. A-MEM: Agentic memory for LLM agents. *arXiv preprint arXiv:2502.12110*, 2025. URL <https://arxiv.org/abs/2502.12110>.
- Yutaro Yamada, Robert Tjarko Lange, Cong Lu, et al. The AI scientist-v2: Workshop-level automated scientific discovery via agentic tree search. *arXiv preprint arXiv:2504.08066*, 2025. URL <https://arxiv.org/abs/2504.08066>.
- John Yang et al. SWE-agent: Agent-computer interfaces enable automated software engineering. *arXiv preprint arXiv:2405.15793*, 2024. URL <https://arxiv.org/abs/2405.15793>.
- Shunyu Yao et al. ReAct: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*, 2023. URL <https://arxiv.org/abs/2210.03629>.