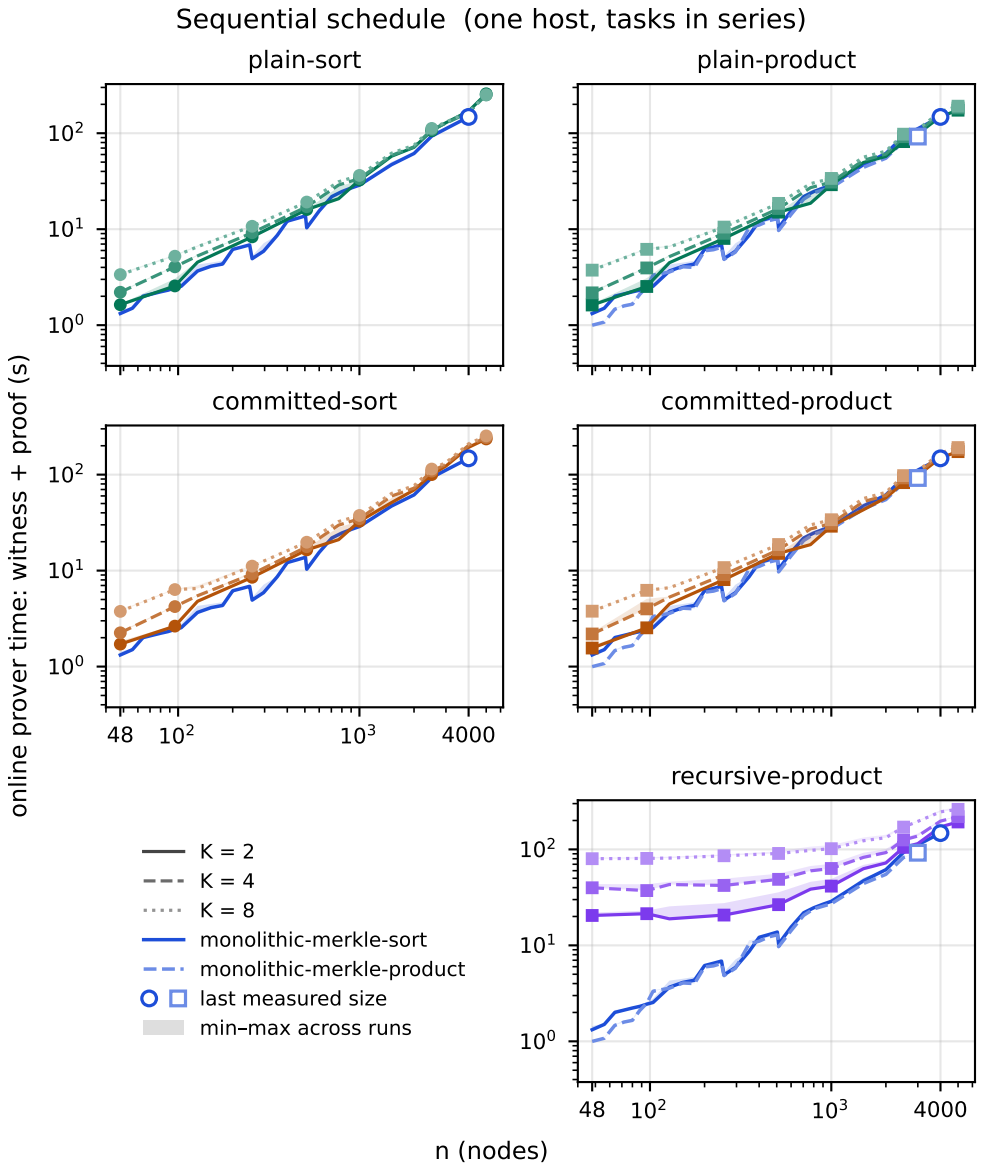
Sequential schedule (one host, tasks in series)
plain-sort
plain-product
committed-sort
committed-product
recursive-product
online prover time: witness + proof (s)
n (nodes)
K = 2
K = 4
K = 8
monolithic-merkle-sort
monolithic-merkle-product
last measured size
min–max across runs