

Z. Axl's Dig Yard — Technical Overview

Version: June 2026
Live site: <https://zaxls-dig-yard.vercel.app>
Repository: <https://github.com/lcamps88/-Z.-Axl-s-Dig-Yard>

1. What This Document Covers

This document describes how the Z. Axl's Dig Yard website is built, what each part does, and how the team manages content and deploys changes. It is written for people who are familiar with websites but not necessarily with the specific technologies used.

2. Tech Stack at a Glance

Layer	Tool	Purpose
Framework	Next.js 16 (App Router)	Pages, routing, server/client rendering
Styling	Tailwind CSS	All visual design — colors, spacing, layout
CMS	Sanity v3	Blog posts, events, FAQs, gallery, testimonials
Database / Auth	Supabase	User accounts, member portal, session management
Payments	Stripe (<i>pending setup</i>)	Membership subscriptions, event ticketing
Hosting	Vercel	Auto-deploys from GitHub on every push to main
Fonts	Google Fonts	Quicksand (UI labels, nav, buttons), Pacifico (script headings), Poppins/Nunito (body copy)

3. How the Site is Structured

app/	
├─ page.tsx	→ Homepage
├─ our-mission/	→ About / Mission page
├─ the-yard/	→ Why The Yard (with anchor sections)
├─ science-of-play/	→ The science behind the experience
├─ plan-your-visit/	→ Visit info, hours, location
├─ play-options/	→ Membership tiers & pricing
├─ programming/	→ Events calendar
│ └─ [slug]/	→ Individual event detail page
├─ celebrations/	
│ └─ special-events/	→ Ticketed special events
│ └─ birthdays/	→ Birthday party packages
│ └─ birthday-faqs/	→ Birthday-specific FAQs
└─ blog/	→ Blog post listing

└─ [slug]/	→ Individual blog post
└─ gallery/	→ Photo gallery grouped by category
└─ faqs/	→ General FAQs with category filter
└─ testimonials/	→ Family testimonials
└─ contact/	→ Contact form
└─ portal/	→ Member dashboard (Supabase auth required)
└─ login/	→ Login / sign-up page
└─ studio/[...tool]/	→ Sanity Studio (content editing)
└─ api/	
└─ contact/	→ Handles contact form submissions
└─ faqs/	→ Serves FAQ data to the FAQs page
└─ stripe/webhook/	→ Stripe webhook handler (membership events)
└─ auth/callback/	→ Supabase OAuth callback

4. Content Management (Sanity CMS)

How to Access

There are two ways to edit content:

1. **Embedded Studio** (at `/studio` on the live site or localhost)

`https://zaxls-dig-yard.vercel.app/studio`

Note: Image uploads require the Vercel domain to be whitelisted in Sanity's CORS settings.
Until that is configured, upload images from the Sanity dashboard instead.

2. **Sanity Dashboard** (always works)

`https://www.sanity.io` → sign in → Z. Axl's Dig Yard project

Content Types

Blog Post

Fields: Title, Slug, Author, Published Date, Excerpt, Main Image, Body (rich text)

Appears on: `/blog` (listing) and `/blog/[slug]` (detail)

Author

Fields: Name, Bio, Profile Image

Used by: Blog posts (referenced)

Event

Fields: Title, Slug, Short Description, Full Description (rich text), Event Date, Image, Price (USD), Max Capacity, Members Only toggle, Stripe Payment Link

Appears on: `/programming` , `/celebrations/special-events` , `/programming/[slug]`

Button logic on event pages:

- If event has a Stripe Payment Link → button links to Stripe checkout
- If event is free (price = \$0) → button says "Book Now — Free" → goes to contact form pre-filled
- If event is paid but no Stripe link yet → button says "Book Now — \$XX" → goes to contact form pre-filled

- If event is Members Only and user is NOT logged in → button is locked, shows "Become a Member" / "Sign In"

Testimonial

Fields: Name, Quote, Star Rating (1–5), Child Age

Appears on: `/testimonials`

FAQ

Fields: Question, Answer, Category (general / visit / memberships / birthdays), Sort Order

Appears on: `/faqs` with tab filter by category

Gallery

Fields: Title, Image, Caption, Category (yard / birthdays / events / art)

Appears on: `/gallery` grouped by category

5. Authentication & Members (Supabase)

Authentication is handled by **Supabase** using email/password. Google OAuth is prepared but not yet activated.

How It Works

1. User visits `/login` → enters email & password
2. Supabase creates a session cookie
3. The site checks this cookie on protected pages (e.g., `/portal`)
4. Members-only event buttons check login status server-side on every page load

Member Portal (`/portal`)

Requires login. Currently shows the member's dashboard. Full membership benefit display will be wired once Stripe is active.

How the Site Checks Auth

Server components (pages that run on the server) call:

```
const supabase = await createClient(); // lib/supabase/server.ts
const { data: { user } } = await supabase.auth.getUser();
```

This reads the session from the request cookie — no client-side JS needed for the auth check.

6. Payments (Stripe — Pending Full Setup)

Stripe is configured in the code but **not yet active** because the Stripe account has not been created.

What Needs to Happen

1. Create a Stripe account at stripe.com
2. Create the 6 membership products in Stripe and copy the price IDs
3. Add these environment variables in Vercel:
 - `NEXT_PUBLIC_STRIPE_PUBLISHABLE_KEY`

- STRIPE_SECRET_KEY
- STRIPE_WEBHOOK_SECRET
- STRIPE_PRICE_FREQUENT_FAMILY
- STRIPE_PRICE_WEEKDAY_FAMILY
- STRIPE_PRICE_WEEKEND_FAMILY
- STRIPE_PRICE_FREQUENT_SINGLE
- STRIPE_PRICE_WEEKDAY_SINGLE
- STRIPE_PRICE_WEEKEND_SINGLE
- STRIPE_PRICE_DROP_IN

4. Register the webhook at `https://zaxls-dig-yard.vercel.app/api/stripe/webhook`

Membership Tiers (defined in `/app/play-options/page.tsx`)

Tier	Audience
Frequent Family	Families, unlimited visits
Weekday Family	Families, weekday sessions
Weekend Family	Families, weekend sessions
Frequent Single	Single adult+child, unlimited
Weekday Single	Single adult+child, weekdays
Weekend Single	Single adult+child, weekends
Drop-In	No membership, pay per session

7. Navbar Structure


The navigation uses a **floating gold pill** design. Items are split left and right of a centered logo.

Left Side	Right Side
Home	Resources ▼ (Blog, Gallery, Testimonials, FAQs)
Our Mission	Memberships
Why The Yard ▼	Contact
Plan Your Visit	Membership Portal button
Play & Celebrations ▼	

The logo is always centered using a CSS 3-column grid (`1fr auto 1fr`).

8. Deployment Pipeline

```
Developer edits code locally
↓
git push origin main
```

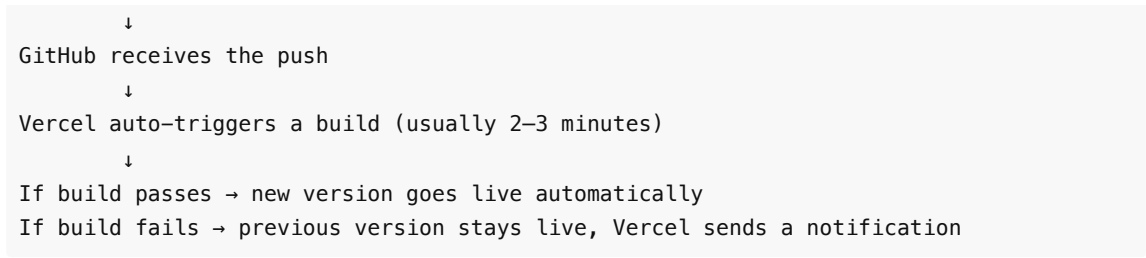

To deploy a change: simply push to the `main` branch. No manual deployment step is needed.

Environment Variables

Sensitive keys (Supabase, Stripe, Sanity tokens) are stored in:

- **Local development:** `.env.local` (never committed to git)
- **Production:** Vercel Dashboard → Project Settings → Environment Variables

9. How Each Page Gets Its Data

Page	Data Source	Fetch Method
<code>/blog</code>	Sanity	Server component — fetches at request time
<code>/blog/[slug]</code>	Sanity	Server component — fetches single post by slug
<code>/gallery</code>	Sanity	Server component
<code>/testimonials</code>	Sanity	Server component
<code>/faqs</code>	Sanity via <code>/api/faqs</code>	Client component — fetches from internal API route
<code>/programming</code>	Sanity	Server component — only shows future events
<code>/programming/[slug]</code>	Sanity	Server component — full event detail
<code>/celebrations/special-events</code>	Sanity	Server component — same event data
<code>/contact</code>	N/A (form)	Submits to <code>/api/contact</code>
<code>/portal</code>	Supabase	Server component — requires authenticated session

Important: Sanity's CDN caches responses for a few minutes. After saving content in Sanity Studio, allow 1–2 minutes before the change appears on the live site.

10. Contact Form Behavior

The contact form at `/contact` handles two types of inquiries:

1. **General inquiries** — User selects an inquiry type and writes a message freely
2. **Event registration** — When there is no Stripe payment link for a paid event, the "Book Now" button links to `/contact?type=Special+Events&event=[Event Name]` . The form pre-fills with:

- Inquiry Type: "Special Events"
- Message: "I'd like to register for: [Event Name]"

Inquiry types available: General Question, Membership Inquiry, Birthday Party Inquiry, Special Events, Private Hire, Other.

11. Pending Items (Before Launch)

Item	Status	Who / How
Stripe account setup	 Not started	Create account, add 6 price IDs to Vercel env vars
Stripe webhook registration	 Awaiting Stripe	Register at <code>/api/stripe/webhook</code> in Stripe dashboard
Google OAuth	 Not started	Google Cloud Console → Supabase Auth settings → set env var
Hero background photo	 Needs photo	Place image at <code>/public/images/hero-bg.jpg</code>
Real gallery photos	 Needs photos	Upload via Sanity Studio (after CORS fix) or sanity.io
Sanity Studio CORS fix	 2-min fix	Add <code>https://zaxls-dig-yard.vercel.app</code> to CORS at manage.sanity.io/projects/itkt3gf0/api
Custom domain	 Not connected	Connect <code>zaxlsdigyard.com</code> in Vercel → Domains settings
Social media links	 Placeholder	Update Instagram/Facebook URLs in <code>components/Footer.tsx</code>

12. Key Files Reference

File	What It Does
<code>components/Navigation.tsx</code>	The entire navbar — desktop pill + mobile drawer
<code>components/Footer.tsx</code>	Footer with links, contact info, social icons
<code>lib/sanity/client.ts</code>	Sanity client configuration
<code>lib/sanity/queries.ts</code>	All GROQ queries (getPosts, getEvents, getFAQs, etc.)
<code>lib/supabase/server.ts</code>	Supabase server-side client (used in server components)
<code>lib/supabase/client.ts</code>	Supabase client-side client (used in client components)
<code>sanity/schemas/</code>	Content type definitions (event, post, faq, gallery, etc.)
<code>sanity.config.ts</code>	Sanity Studio configuration

tailwind.config.ts	Design tokens — colors, fonts, spacing
app/layout.tsx	Root layout — fonts, global providers, navigation
middleware.ts	Supabase session refresh on every request

13. Design Tokens (Brand Colors)

Defined in `tailwind.config.ts` :

Token	Hex	Used For
nav-gold	#F1C872	Navbar pill, CTA buttons
nav-text	#4B4B4B	Navbar labels
forest	(dark green)	Primary buttons, icons
lavender	#C4B5ED	Secondary CTA, accents
dusk	(dark navy)	Headings, body text
mist	(light gray-blue)	Section backgrounds

Fonts: `font-quicksand` (navigation, labels, buttons), `font-script` (Pacifico — decorative headings), `font-body` (Nunito — paragraph text).