



Jobs

Generated by Talend Cloud Data
Integration

Project Name	Projets_Bils-Deroo	GENERATION DATE	25 mai 2021 15:37:13
AUTHOR	Caussines, Laurent	Talend Cloud VERSION	7.3.1.20200219_1130

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	Projets_Bils-Deroo
Language	java

Description	
-------------	--

Description

Properties	Values
Name	Copie_de_la_table_CNDPF_de_I_AS400
Author	Caussines, Laurent
Version	0.1
Purpose	Copie de la table sur le cloud
Status	
Description	Transfert des données de la table FSTOK9.CDNPF de l'AS400 vers la table STOCK_CDNPF de la table DEV_ODS de Snowflake
Creation	25 mai 2021 15:32:28
Modification	25 mai 2021 15:36:51

Preview Picture

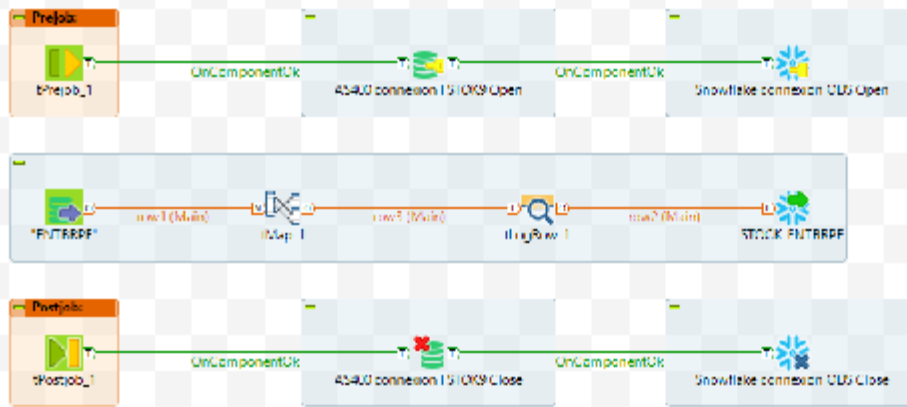

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	true
Use logs (tLogCatcher)	true
Use volumetrics (tFlowMeterCatcher)	true

On Console	false
On Files	false
On Databases	true
Property Type	
Property	
Property:source	
Db Type	tMysqlOutput
Host	"localhost"
Port	"3306"
Db Name	"TALEND_LOG"
Additional parameters	""
Schema	
User	"TALEND"
Password	*****
Datasource	""
Logs Table	"TALEND_LOGS"
Meter Table	"TALEND_METERS"

Stats Table	"TALEND_STATS"
Catch components statistics	true
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextPROD

Name	Prompt
new1	new1?
ASPGEN_AS400_connection_AdditionalParams	ASPGEN_AS400_connection_AdditionalPara
ASPGEN_AS400_connection_Database	ASPGEN_AS400_connection_Database?
ASPGEN_AS400_connection_Login	ASPGEN_AS400_connection_Login?
ASPGEN_AS400_connection_Password	ASPGEN_AS400_connection_Password?
ASPGEN_AS400_connection_Server	ASPGEN_AS400_connection_Server?
Snowflake_connexion_ODS_account	Snowflake_connexion_ODS_account?
Snowflake_connexion_ODS_authenticationType	Snowflake_connexion_ODS_authenticationTy

Snowflake_connexion_ODS_customRegionID	Snowflake_connexion_ODS_customRegionID
Snowflake_connexion_ODS_db	Snowflake_connexion_ODS_db?
Snowflake_connexion_ODS_jdbcParameters	Snowflake_connexion_ODS_jdbcParameters'
Snowflake_connexion_ODS_keyAlias	Snowflake_connexion_ODS_keyAlias?
Snowflake_connexion_ODS_loginTimeout	Snowflake_connexion_ODS_loginTimeout?
Snowflake_connexion_ODS_region	Snowflake_connexion_ODS_region?
Snowflake_connexion_ODS_role	Snowflake_connexion_ODS_role?
Snowflake_connexion_ODS_schemaName	Snowflake_connexion_ODS_schemaName?
Snowflake_connexion_ODS_userPassword_password	Snowflake_connexion_ODS_userPassword_p
Snowflake_connexion_ODS_userPassword_userId	Snowflake_connexion_ODS_userPassword_u
Snowflake_connexion_ODS_warehouse	Snowflake_connexion_ODS_warehouse?
FSTOK9_AS400_connection_AdditionalParams	FSTOK9_AS400_connection_AdditionalParar
FSTOK9_AS400_connection_Password	FSTOK9_AS400_connection_Password?
FSTOK9_AS400_connection_Database	FSTOK9_AS400_connection_Database?
FSTOK9_AS400_connection_Server	FSTOK9_AS400_connection_Server?
FSTOK9_AS400_connection_Login	FSTOK9_AS400_connection_Login?

Name	Prompt
new1	new1?
ASPGEN_AS400_connection_AdditionalParams	ASPGEN_AS400_connection_AdditionalPara
ASPGEN_AS400_connection_Database	ASPGEN_AS400_connection_Database?
ASPGEN_AS400_connection_Login	ASPGEN_AS400_connection_Login?
ASPGEN_AS400_connection_Password	ASPGEN_AS400_connection_Password?
ASPGEN_AS400_connection_Server	ASPGEN_AS400_connection_Server?
Snowflake_connexion_ODS_account	Snowflake_connexion_ODS_account?
Snowflake_connexion_ODS_authenticationType	Snowflake_connexion_ODS_authenticationTy
Snowflake_connexion_ODS_customRegionID	Snowflake_connexion_ODS_customRegionID
Snowflake_connexion_ODS_db	Snowflake_connexion_ODS_db?
Snowflake_connexion_ODS_jdbcParameters	Snowflake_connexion_ODS_jdbcParameters'
Snowflake_connexion_ODS_keyAlias	Snowflake_connexion_ODS_keyAlias?
Snowflake_connexion_ODS_loginTimeout	Snowflake_connexion_ODS_loginTimeout?
Snowflake_connexion_ODS_region	Snowflake_connexion_ODS_region?
Snowflake_connexion_ODS_role	Snowflake_connexion_ODS_role?
Snowflake_connexion_ODS_schemaName	Snowflake_connexion_ODS_schemaName?

Snowflake_connexion_ODS_userPassword_password	Snowflake_connexion_ODS_userPassword_p
Snowflake_connexion_ODS_userPassword_userId	Snowflake_connexion_ODS_userPassword_u
Snowflake_connexion_ODS_warehouse	Snowflake_connexion_ODS_warehouse?
FSTOK9_AS400_connection_AdditionalParams	FSTOK9_AS400_connection_AdditionalParar
FSTOK9_AS400_connection_Password	FSTOK9_AS400_connection_Password?
FSTOK9_AS400_connection_Database	FSTOK9_AS400_connection_Database?
FSTOK9_AS400_connection_Server	FSTOK9_AS400_connection_Server?
FSTOK9_AS400_connection_Login	FSTOK9_AS400_connection_Login?


Component List

Component Name	Component Type
tDBCclose_1	tAS400Close
tDBCclose_2	tSnowflakeClose
tDBConnection_1	tAS400Connection
tDBConnection_2	tSnowflakeConnection
tDBInput_1	tAS400Input
tDBOutput_1	tSnowflakeOutput

tLogRow_1	tLogRow
tMap_1	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob

Components Description

Component tAS400Close


	UNIQUE NAME	tDBCclose_1	INPUT(S)	tPostjob_1
	LABEL	AS400 connexion FSTOK9 Close	OUTPUT(S)	tDBCclose_2

Component Parameters:

Properties	Values
Database	tAS400Close
Unique Name	tDBCclose_1
Component Name	tAS400Close
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/AS400
Start	false
Startable	true
SUBTREE_START	true

END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAS400Close
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Component List	tDBConnection_1
Label format	AS400 connexion FSTOK9 Close
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tSnowflakeClose


	UNIQUE NAME	tDBCclose_2	INPUT(S)	tDBCclose_1
	LABEL	Snowflake connexion ODS Close	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tSnowflakeClose
Unique Name	tDBCclose_2
Component Name	tSnowflakeClose
Family	Cloud/Snowflake
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
Help	HELP
Update components	true
IREPORT_PATH	
Property Type	Built-In
Query Type	Built-In
tStatCatcher Statistics	false
Enable parallel execution	false

Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
properties.referencedComponent.displayName	
Label format	Snowflake connexion ODS Close
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component **tAS400Connection**

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tPrejob_1
	LABEL	AS400 connexion FSTOK9 Open	OUTPUT(S)	tDBConnection_2


Component Parameters:

Properties	Values
Database	tAS400Connection
Unique Name	tDBConnection_1
Component Name	tAS400Connection
Version	0.102 (ALPHA)

Family	Databases/DB Specifics/AS400 ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAS400Connection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	repository: DB (AS400):FSTOK9_AS400_connexion
DB Version	jt400-9.8.jar
Host	context.FSTOK9_AS400_connection_Server
Database	context.FSTOK9_AS400_connection_Database
Database Driver	AS400

Username	context.FSTOK9_AS400_connection_Login
Password	context.FSTOK9_AS400_connection_Password
Encoding	"ISO-8859-15"
Use or register a shared DB Connection	false
Shared DB Connection Name	
Additional JDBC Parameters	context.FSTOK9_AS400_connection_AdditionalParams
Auto Commit	false
Label format	AS400 connexion FSTOK9 Open
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component **tSnowflakeConnection**

	UNIQUE NAME	tDBConnection_2	INPUT(S)	tDBConnection_1
	LABEL	Snowflake connexion ODS Open	OUTPUT(S)	none


Component Parameters:

Properties	Values
------------	--------

Database	tSnowflakeConnection
Unique Name	tDBConnection_2
Component Name	tSnowflakeConnection
Family	Cloud/Snowflake
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
Help	HELP
Update components	true
IREPORT_PATH	
Property Type	Built-In
Query Type	Built-In
tStatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Account	context.Snowflake_connexion_ODS_account
Snowflake Region	context.Snowflake_connexion_ODS_region
Authentication Type	context.Snowflake_connexion_ODS_authenticationType
User Id	context.Snowflake_connexion_ODS_userPassword_userId

Password	context.Snowflake_connexion_ODS_userPassword_password
Key Alias	context.Snowflake_connexion_ODS_keyAlias
Warehouse	context.Snowflake_connexion_ODS_warehouse
Schema	context.Snowflake_connexion_ODS_schemaName
Database	context.Snowflake_connexion_ODS_db
Auto Commit	true
Additional JDBC Parameters	context.Snowflake_connexion_ODS_jdbcParameters
Use Custom Snowflake Region	true
Region ID	context.Snowflake_connexion_ODS_customRegionID
Login Timeout	context.Snowflake_connexion_ODS_loginTimeout
Role	context.Snowflake_connexion_ODS_role
Label format	Snowflake connexion ODS Open
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tAS400Input

	UNIQUE NAME	tDBInput_1	INPUT(S)	none

	LABEL	__TABLE__	OUTPUT(S)	tMap_1
--	-------	-----------	-----------	------------------------

Component Parameters:

Properties	Values
Database	tAS400Input
Unique Name	tDBInput_1
Component Name	tAS400Input
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/AS400
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tAS400Input
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Using an existing connection	true
Component List	tDBConnection_1
Property Type	repository: DB (AS400):FSTOK9_AS400_connexion
DB Version	jt400-9.8.jar
Host name	context.FSTOK9_AS400_connection_Server
Database	context.FSTOK9_AS400_connection_Database
Database Driver	AS400
Username	context.FSTOK9_AS400_connection_Login
Password	context.FSTOK9_AS400_connection_Password
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Table Name	"ENTBRPF"
Query Type	Built-In
Guess Schema	""
Query	"SELECT * FROM FSTOK9.ENTBRPF"
Mapping	as400_id
Additional JDBC Parameters	context.FSTOK9_AS400_connection_AdditionalParams
Encoding	"ISO-8859-15"
Trim all the String/Char columns	true

Trim column	{SCHEMA_COLUMN=CSOC, TRIM=false}, {SCHEMA_COLUMN=CDPT, TRIM=false}, {SCHEMA_COLUMN=ENBR, TRIM=false}, {SCHEMA_COLUMN=CFS, TRIM=false}, {SCHEMA_COLUMN=EBRF, TRIM=false}, {SCHEMA_COLUMN=ERBRF, TRIM=false}, {SCHEMA_COLUMN=ETRSP, TRIM=false}, {SCHEMA_COLUMN=ECHF, TRIM=false}, {SCHEMA_COLUMN=EVHCL, TRIM=false}, {SCHEMA_COLUMN=ETPTR, TRIM=false}, {SCHEMA_COLUMN=DSCSA, TRIM=false}, {SCHEMA_COLUMN=DAASA, TRIM=false}, {SCHEMA_COLUMN=DMMSA, TRIM=false}, {SCHEMA_COLUMN=DJJSA, TRIM=false}, {SCHEMA_COLUMN=DHA, TRIM=false}, {SCHEMA_COLUMN=DSCSD, TRIM=false}, {SCHEMA_COLUMN=DAASD, TRIM=false}, {SCHEMA_COLUMN=DMMSD, TRIM=false}, {SCHEMA_COLUMN=DJJSD, TRIM=false}, {SCHEMA_COLUMN=DHD, TRIM=false}, {SCHEMA_COLUMN=DCOM1, TRIM=false}, {SCHEMA_COLUMN=DCOM2, TRIM=false}, {SCHEMA_COLUMN=DCOM3, TRIM=false}, {SCHEMA_COLUMN=DCOM4, TRIM=false}, {SCHEMA_COLUMN=DLITG, TRIM=false}, {SCHEMA_COLUMN=DAGTR, TRIM=false}, {SCHEMA_COLUMN=DDMVT, TRIM=false}
Label format	__TABLE__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tDBInput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
CSOC	false	String	2		false	
CDPT	false	String	2		false	
ENBR	false	String	11		false	
CFS	false	String	13		false	
EBRF	false	String	8		false	

ERBRF	false	String	20		false	
ETRSP	false	String	10		false	
ECHF	false	String	10		false	
EVHCL	false	String	10		false	
ETPTR	false	String	2		false	
DSCSA	false	String	1		false	
DAASA	false	String	2		false	
DMMSA	false	String	2		false	
DJJS	false	String	2		false	
DHA	false	BigDecimal	6		false	
DSCSD	false	String	1		false	
DAASD	false	String	2		false	
DMMSD	false	String	2		false	
DJJSD	false	String	2		false	
DHD	false	BigDecimal	6		false	
DCOM1	false	String	40		false	
DCOM2	false	String	40		false	

DCOM3	false	String	40		false	
DCOM4	false	String	40		false	
DLITG	false	String	1		false	
DAGTR	false	String	3		false	
DDMVT	false	String	1		false	

Original Function Parameters:
Component tSnowflakeOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tLogRow_1
	LABEL	STOCK_ENTBRPF	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tSnowflakeOutput
Unique Name	tDBOutput_1
Component Name	tSnowflakeOutput
Family	Cloud/Snowflake
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
Help	HELP

Update components	true
REPORT_PATH	
Property Type	Built-In
Query Type	Built-In
StatCatcher Statistics	false
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
properties.referencedComponent.displayName	
Account	context.Snowflake_connexion_ODS_account
Snowflake Region	context.Snowflake_connexion_ODS_region
Authentication Type	context.Snowflake_connexion_ODS_authenticationType
User Id	context.Snowflake_connexion_ODS_userPassword_userId
Password	context.Snowflake_connexion_ODS_userPassword_password
Key Alias	context.Snowflake_connexion_ODS_keyAlias
Warehouse	context.Snowflake_connexion_ODS_warehouse
Schema	context.Snowflake_connexion_ODS_schemaName
Database	context.Snowflake_connexion_ODS_db
Table	"STOCK_ENTBRPF"
Schema	{"type":"record","name":"STOCK_ENTBRPF","fields":[{"name":"CSOC","type":["string","null"],"di.tat
Table Action	NONE
Output Action	INSERT

Upsert Key Column	CSOC
Auto Commit	true
Additional JDBC Parameters	context.Snowflake_connexion_ODS_jdbcParameters
Use Custom Snowflake Region	true
Region ID	context.Snowflake_connexion_ODS_customRegionID
Login Timeout	context.Snowflake_connexion_ODS_loginTimeout
Role	context.Snowflake_connexion_ODS_role
Allow Snowflake to convert columns and tables to uppercase (Note: Unquoted identifiers should match the Snowflake Identifier Syntax.)	true
Convert empty strings to null	false
Custom DB Type	false
DB column type	[]
Custom Date type mapping	false
Convert Date values to	DATE
schemaReject.schema	{"type":"record","name":"rejectOutput","fields":[{"name":"columnName","type":"string","talend.isLoca
REPOSITORY_ALLOW_AUTO_SWITCH	true
Label format	STOCK_ENTBRPF
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false


Validation Rule Type	
----------------------	--

Schema for STOCK_ENTBRPF :

Column	Key	Type	Length	Precision	Nullable	Comment
CSOC	false	String			true	
CDPT	false	String			true	
ENBR	false	String			true	
CFS	false	String			true	
EBRF	false	String			true	
ERBRF	false	String			true	
ETRSP	false	String			true	
ECHF	false	String			true	
EVHCL	false	String			true	
ETPTR	false	String			true	
DSCSA	false	String			true	
DAASA	false	String			true	
DMMSA	false	String			true	
DJJA	false	String			true	
DHA	false	BigDecimal			true	

DSCSD	false	String			true	
DAASD	false	String			true	
DMMSD	false	String			true	
DJJSD	false	String			true	
DHD	false	BigDecimal			true	
DCOM1	false	String			true	
DCOM2	false	String			true	
DCOM3	false	String			true	
DCOM4	false	String			true	
DLITG	false	String			true	
DAGTR	false	String			true	

Original Function Parameters:
Component tLogRow

	UNIQUE NAME	tLogRow_1	INPUT(S)	tMap_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1

Component Parameters:

Properties	Values
Unique Name	tLogRow_1

Component Name	tLogRow
Version	0.101 (ALPHA)
Family	Logs_Errors
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tLogRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Basic	true
Table (print values in cells of a table)	false

Vertical (each row is a key/value list)	false
Print unique name	true
Print label	false
Print unique name and label	false
Field Separator	" "
Print header	false
Print component unique name in front of each output row	false
Print schema column name in front of each value	false
Use fixed length for values	false
Lengths	[{SCHEMA_COLUMN=CSOC, LENGTH=10}, {SCHEMA_COLUMN=CDPT, LENGTH=10}, {SCHEMA_COLUMN=ENBR, LENGTH=10}, {SCHEMA_COLUMN=CFS, LENGTH=10}, {SCHEMA_COLUMN=EBRF, LENGTH=10}, {SCHEMA_COLUMN=ERBRF, LENGTH=10}, {SCHEMA_COLUMN=ETRSP, LENGTH=10}, {SCHEMA_COLUMN=ECHF, LENGTH=10}, {SCHEMA_COLUMN=EVHCL, LENGTH=10}, {SCHEMA_COLUMN=ETPTR, LENGTH=10}, {SCHEMA_COLUMN=DSCSA, LENGTH=10}, {SCHEMA_COLUMN=DAASA, LENGTH=10}, {SCHEMA_COLUMN=DMMSA, LENGTH=10}, {SCHEMA_COLUMN=DJJS, LENGTH=10}, {SCHEMA_COLUMN=DHA, LENGTH=10}, {SCHEMA_COLUMN=DSCSD, LENGTH=10}, {SCHEMA_COLUMN=DAASD, LENGTH=10}, {SCHEMA_COLUMN=DMMSD, LENGTH=10}, {SCHEMA_COLUMN=DJSD, LENGTH=10}, {SCHEMA_COLUMN=DHD, LENGTH=10}, {SCHEMA_COLUMN=DCOM1, LENGTH=10}, {SCHEMA_COLUMN=DCOM2, LENGTH=10}, {SCHEMA_COLUMN=DCOM3, LENGTH=10}, {SCHEMA_COLUMN=DCOM4, LENGTH=10}, {SCHEMA_COLUMN=DLITG, LENGTH=10}, {SCHEMA_COLUMN=DAGTR, LENGTH=10}]
Print content with log4j	true
Min column number of optimize code	100
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false


Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for STOCK_ENTBRPF :

Column	Key	Type	Length	Precision	Nullable	Comment
CSOC	false	String			true	
CDPT	false	String			true	
ENBR	false	String			true	
CFS	false	String			true	
EBRF	false	String			true	
ERBRF	false	String			true	
ETRSP	false	String			true	
ECHF	false	String			true	
EVHCL	false	String			true	
ETPTR	false	String			true	
DSCSA	false	String			true	
DAASA	false	String			true	
DMMSA	false	String			true	

DJJS	false	String			true	
DHA	false	BigDecimal			true	
DSCSD	false	String			true	
DAASD	false	String			true	
DMMSD	false	String			true	
DJJS	false	String			true	
DHD	false	BigDecimal			true	
DCOM1	false	String			true	
DCOM2	false	String			true	
DCOM3	false	String			true	
DCOM4	false	String			true	
DLITG	false	String			true	
DAGTR	false	String			true	

Original Function Parameters:
Component tPostjob


	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBCclose_1

Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob


	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\Talend-studio\studio\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tDBInput_1

Use an existing validation rule	false
---------------------------------	-------

Mapper table for tMap_1 (input):

Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
CSOC	String		false
CDPT	String		false
ENBR	String		false
CFS	String		false
EBRF	String		false

ERBRF	String		false
ETRSP	String		false
ECHF	String		false
EVHCL	String		false
ETPTR	String		false
DSCSA	String		false
DAASA	String		false
DMMSA	String		false
DJJSa	String		false
DHA	BigDecimal		false
DSCSD	String		false
DAASD	String		false
DMMSD	String		false
DJJSD	String		false
DHD	BigDecimal		false
DCOM1	String		false
DCOM2	String		false

DCOM3	String		false
DCOM4	String		false
DLITG	String		false
DAGTR	String		false
DDMVT	String		false

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

CSOC	String	row1.CSOC	true
CDPT	String	row1.CDPT	true
ENBR	String	row1.ENBR	true
CFS	String	row1.CFS	true
EBRF	String	row1.EBRF	true
ERBRF	String	row1.ERBRF	true
ETRSP	String	row1.ETRSP	true
ECHF	String	row1.ECHF	true
EVHCL	String	row1.EVHCL	true
ETPTR	String	row1.ETPTR	true
DSCSA	String	row1.DSCSA	true
DAASA	String	row1.DAASA	true
DMMSA	String	row1.DMMSA	true
DJJSA	String	row1.DJJSA	true
DHA	BigDecimal	row1.DHA	true
DSCSD	String	row1.DSCSD	true
DAASD	String	row1.DAASD	true

DMMSD	String	row1.DMMSD	true
DJJSD	String	row1.DJJSD	true
DHD	BigDecimal	row1.DHD	true
DCOM1	String	row1.DCOM1	true
DCOM2	String	row1.DCOM2	true
DCOM3	String	row1.DCOM3	true
DCOM4	String	row1.DCOM4	true
DLITG	String	row1.DLITG	true
DAGTR	String	row1.DAGTR	true

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------