NETWORK INTRUSION DETECTION SYSTEM A PROJECT REPORT – PHASE I

Submitted by

U.ROHITH(9920004138)

K.PARAMESH(9920004808)

U.ANIL KUMAR(9920004263)

P.LAKSHMI CHAITANYA(9920004261)

In partial fulfillment for the award of the degree

of

BACHELOR OF TECHNOLOGY

IN

Computer Science and Engineering



SCHOOL OF COMPUTING DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

KALASALINGAM ACADEMY OF RESEARCH AND EDUCATION

(Deemed to be University)

2023-2024

Kalasalingam Academy of Research and Education KRISHNANKOIL 626 126

DECLARATION BY THE STUDENT

	ION S	declare YSTEM " i		 "NETWORK and no part of it has been	INTRUSION en reproduced from
U.Rohith (99200041	138)			U.Anil Kumar (9920004263)	
K.Param (9920004				P.Lakshmi Chaita (9920004261)	anya
Date:					

KALASALINGAM UNIVERSITY (Kalasalingam Academy of Research and Education)

KRISHNANKOIL 626 126

BONAFIDE CERTIFICATE

Certified that this project report "NETWORK INTRUSION DETECTION SYSTEM" is the bonafide work of "U.Rohith(9920004138) ,K.Paramesh(9920004808) ,U.Anil Kumar(9920004263),P.Lakshmi Chaitanya(9920004261)" who carried out the project work under my supervision.

SUPERVISOR

Kalasalingam Academy of Research

HEAD OF THE DEPARTMENT

Kalasalingam Academy of Research

Dr.R.Sumathi Dr.N.Suresh Kumar
Associate Professor Professor & Head Of The Department

Computer Science and Engineering

Computer Science and Engineering

and Education and Education

Krishnankoil 626126 Krishnankoil 626126

Submitted for the Project Viva-voce examination held on

Internal Examiner External Examiner

ACKNOWLEDGEMENT

First and foremost, I wish to thank the **Almighty God** for his grace and benediction to complete this Project work successfully. I would like to convey my special thanks from the bottom of my heart to my dear **Parents** and affectionate **Family members** for their honest support for the completion of this Project work.

I express deep sense of gratitude to "Kalvivallal" Thiru. **T. Kalasalingam** B.com., Founder Chairman, "Ilayavallal" **Dr. K. Sridharan**, Ph.D., Chancellor, **Dr. S. Shasi Anand**, Ph.D., Vice President(Academic), **Mr. S. Arjun Kalasalingam** M.S., Vice President(Administration) , **Dr. S. Narayanan**, Vice-Chancellor, **Dr. V. Vasudevan**, Ph.D., Registrar , **Dr. P. Deepalakshmi**, Ph.D., Dean (School of Computing) and **Dr.N.Suresh Kumar** Head, Department of CSE, Kalasalingam Academy of Research and Education for granting the permission and providing necessary facilities to carry out Project work.

I would like to express my special appreciation and profound thanks to my enthusiastic Project Supervisor **Dr.R.Sumathi**, Assistant Professor/CSE of Kalasalingam Academy of Research and Education [KARE] for her inspiring guidance, constant encouragement with my work during all stages. I am extremely glad that I had a chance to do my Project under my Guide, who truly practices and appreciates deep thinking. I will be forever indebted to my Guide for all the time he has spent with me in discussions. And during the most difficult times when writing this report, he gave me the moral support and the freedom I needed to move on.

Besides my Project guide, I would like to thank the rest of Class committee members and all faculty members and Non-Teaching staff for their insightful comments and encouragement. Finally, but by no means least, thanks go to all my school and college teachers, well wishers, friends for almost unbelievable support.



School of Computing

Department of Computer Science and Engineering Project Summary

Project Title	Network Intrusion Detection System	
Project Team Members (Name with Register No)	2. K.PARAMESH (99200048) 3. U.ANIL KUMAR (9920004) 4. P.LAKSHMI CHAITANYA (99200042)	308) 263) 261)
Guide Name/Designation	Dr. R.Sumathi, Assistant Professor, Department of and Engineering	Computer Science
Program Concentration Area	Intrusion Detection In Networks	
Technical Requirements	PyCharm, Jupyter notebook, Numpy, IO, OS, pandas,Html,Css,JavaScript, tensorflow to com	
Engineering standards and realist	ic constraints in these areas: (Refer Appendix in pag	ge 4 of this doc.)
Area	Codes & Standards / Realistic Constraints	Tick
		√
Economic		
Environmental		
Social		
Ethical		

Health and Safety		
Manufacturability		
Sustainability	In terms of sustainability, it can indirectly contribute by safeguarding systems against attacks that could disrupt operations, potentially reducing waste or downtime caused by security breaches.	

Realistic Constraints:

Sustainability:

Digital Trust: Network Intrusion Detection Systems (NIDS) are crucial for fostering trust in digital systems by operating transparently and effectively Social Impact: Upholding data privacy and trust in online interactions is essential for the long-term sustainability of digital environments. Data Privacy and Trust Safeguarding Sensitive Information: NIDS play a pivotal role in safeguarding sensitive data, contributing significantly to maintaining trust in digital systems Privacy Adherence: NIDS should strictly comply with privacy regulations and best practices to ensure the privacy and trust of users during online interactions. Security and Stability: Preventing Disruptions: NIDS contribute to societal stability by proactively preventing disruptions caused by cyber threats. Critical Infrastructure Protection: Protecting critical infrastructure from cyber threats is essential for overall societal security and stability.

Engineering standards:

ISO/IEC 27001:Information Security Management: NIDS should align with ISO/IEC 27001 guidelines to establish robust information security management systems.

IEEE 802 Standards: Network Compatibility: NIDS must be compatible with IEEE 802 Standards to effectively monitor and analyze network traffic across various communication protocols.

NIST SP 800 Series:Intrusion Detection Guidelines: Adherence to NIST SP 800-94 and related documents provides critical guidelines for designing, implementing, monitoring, and responding to security incidents in NIDS.

Integrating NIDS within these realistic boundaries and engineering standards ensures a secure, trustworthy, and compatible network infrastructure. This approach supports maintaining societal trust, safeguarding data privacy, and ensuring stability while aligning with established industry standards and best practices in information security management and network protocols.

ABSTRACT

Network intrusion discovery technology plays an important part in maintaining network security, the main work is to continuously descry the current network status, through the discovery of abnormal geste in the network state, timely warning to warn network directors. The punctuality and delicacy of the intrusion discovery system (IDS) is critical to the vacuity and trustability of the current network. In response to the problems of high false alarm rate, low discovery effectiveness and limited functions generally set up in IDS. With the growing reliance on networked systems and the adding complication of cyber pitfalls, the need for robust network intrusion discovery systems (NIDS) has come consummate. We're going to apply a Network Intrusion Discovery System that leverages both traditional machine learning and deep learning algorithms to enhance network security collecting and preprocessing network traffic data, which serves as the foundation for training and testing the intrusion detection models. The objective of a project on a Network Intrusion Detection System (NIDS) using machine learning algorithms Classifier(DTC),K Decision Tree such as Nearest Neighbours(KNN),Linear Regression(LR), MultiNomialNavieBayes(MNB), Random **Forest** Classifier(RFC),Support Vector Classifier(SVC) and deep learning algorithms such as convulutional neural networks(CNN),recurrent neural networks(RNN) and Feed forward neural networks(FNN)is to develop a system that can effectively detect the attack type Use machine learning and deep learning algorithms to identify abnormal patterns and behaviors in network traffic dataset.Identification of Intrusions: Detect and classify different types of network intrusions, such as malware attacks, 'apache2', 'back', 'buffer overflow', 'ftp write' and other malicious attacks and compare the accuracies of ml and dl algorithms.

TABLE OF CONTENTS

CHAPTER NO.		TITLE	PAGE NO.
		CT FIGURES ABBREVATIONS	7 10 11
1.	INTRODU		12
	1.1	Convolutional Neural Network	
	1.2	System Analysis and Feasibility Study	
	1.3	Block Diagram	
	1.4	Software development life cycle ,Technologies and Algorithms	
	1.5	Feasibility Study	
	1.6	Collaboration Diagram	
2.	LITERATI	URE REVIEW	17
3.	PROBLEM	I DEFINITION	20
4.	PROJECT	OBJECTIVES	21
5.	REQUIRE	MENTS	22
	5.1	Requirement Description	
	5.2	Hardware requirements	
	5.3	Software requirements	

CHAPTER N	O. TITLE	PAGE NO
6	PROPOSED SYSTEM/SYSTEM DESIGN	24
	6.1 Proposed Algorithm	
	6.2 Component Diagram	
7	CONCLUSION	27
Q	DEFEDENCES	28

LIST OF FIGURES

FIGURES	DETAILS
Figure 1.1	Block Diagram
Figure 1.2	Software Development Life Cycle
Figure 6.1	Proposed Flow Chart

LIST OF ABBREVIATIONS

DTC	Decision Tree Classifier
KNN	K Nearest Neighbours
LR	Linear Regression
MNB	MultiNomial NavieBayes
RFC	Random Forest Classifier
SVC	Support Vector Classifier
CNN	Convulutional Neural Networks
RNN	Recurrent Neural Networks
FNN	Feed Forward Neural Networks
AI	Artificial Intelligence
ML	Machine Learning
DL	Deep Learning

CHAPTER 1: INTRODUCTION

1.1 Convolutional Neural Network

Convolutional Neural Networks (CNNs) have been employed in Network Intrusion Detection Systems (NIDS) for their ability to learn hierarchical features from input data, making them effective for detecting patterns in network traffic. Here's an original breakdown:

CNNs in Network Intrusion Detection:

1. **Input Processing:**

 Packet Representation: CNNs can process network packets directly or after converting them into spectrograms, time-series data, or other suitable representations.

2. Convolutional Layers:

- **Feature Extraction:** CNNs use convolutional layers to extract spatial and temporal features from network traffic.
- **Filters & Kernels:** Filters in CNNs act as feature detectors, learning patterns at different levels of abstraction.

3. **Pooling Layers:**

• **Downsampling:** Pooling layers reduce dimensionality, retaining important information while discarding less relevant details.

4. Fully Connected Layers:

• Classification: After feature extraction, fully connected layers interpret the learned features for classification into attack types or normal behavior.

5. Training and Optimization:

- **Data Preparation:** Preprocessing involves converting network data into a suitable format and labeling it according to attack types.
- **Training:** CNNs are trained using labeled datasets, adjusting weights and biases to minimize prediction errors.
- **Regularization Techniques:** Techniques like dropout or batch normalization can be employed to avoid overfitting.

6. Evaluation and Performance:

• **Metrics:** NIDS performance is evaluated using metrics like accuracy, precision, recall, F1-score on a separate test dataset.

• **Fine-tuning:** Adjustments to hyperparameters or model architecture might be necessary for optimal performance.

7. Challenges in NIDS with CNNs:

- **Imbalanced Data:** Addressing imbalances where certain attack types are significantly less represented in the dataset.
- Adaptability: Ensuring the model can detect new and evolving attack types.
- **Real-time Processing:** Optimizing CNNs for efficient real-time analysis of network traffic.

8. Applications and Advantages:

- CNNs offer a powerful means to automatically learn and identify complex patterns in network traffic.
- Their hierarchical feature extraction capability makes them well-suited for NIDS tasks.

In practice, CNNs are just one approach among various techniques used in NIDS, but their ability to automatically learn hierarchical features from raw network data has shown promising results in identifying different types of network attacks.

1.2 System Analysis and Feasibility Study

Existing Method:

This model demonstrates an existing method that was developed using specific deep learning methods. Although ANN methods, one of the machine learning techniques, are used in this procedure, the accuracy was not very good.

Disadvantages:

- Less feature compatibility
- Low accuracy

Proposed System:

In the context of developing a robust Network Intrusion Detection System (NIDS), the utilization of Convolutional Neural Networks (CNNs) stands as a promising approach. CNNs possess

inherent capabilities in capturing intricate patterns and features within complex data, making them well-suited for analyzing network traffic data. By leveraging the hierarchical feature extraction prowess of CNNs, the system can discern subtle, abstract patterns indicative of various network attacks. The network packets or representations of network traffic can be processed through convolutional layers, extracting spatial and temporal features. The subsequent layers, including pooling and fully connected layers, allow for the abstraction and interpretation of learned features, enabling classification into different attack types or normal network behavior. Furthermore, the adaptability of CNNs to learn from large datasets and their potential for real-time analysis position them as a viable solution for detecting known and emerging threats within network infrastructures.

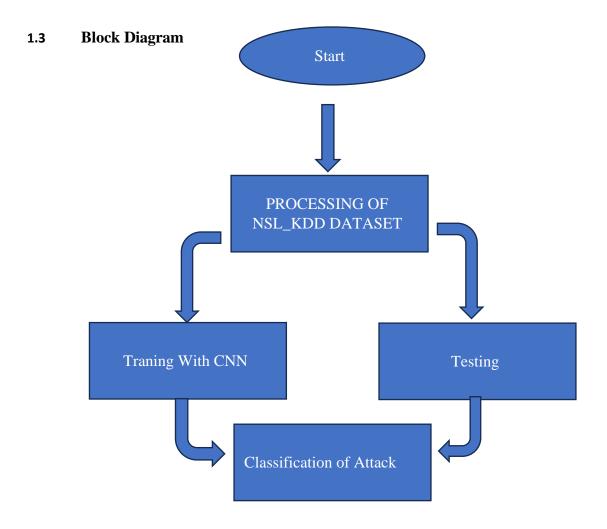


Figure 1.1 Block Diagram

1.4 Software development life cycle ,Technologies and Algorithms

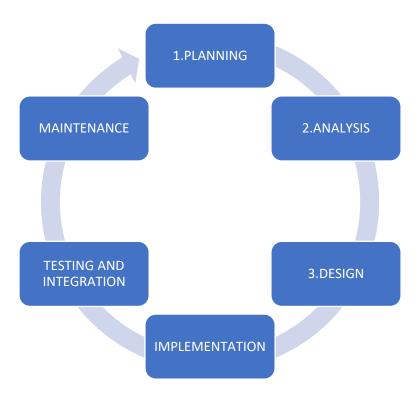


Figure 1.2 software development life cycle

Technologies and Algorithms

What types of technologies versions is used:

- Working of Tensor Flow,html,css,javascript,python
- Implementation of Deep Learning techniques
- Working of CNN algorithm
- Building of model creations

1.5 Feasibility Study

This stage involves assessing the project's viability and presenting a business proposal that includes a very basic project design and some cost estimates. During system analysis, the viability of the suggested system must be examined. This will ensure that the suggested solution won't put a strain on the company. It's essential for the feasibility study to comprehend the primary system requirements.

Three key considerations involved in the feasibility analysis are

- **♦** ECONOMICAL FEASIBILITY
- **♦** TECHNICAL FEASIBILITY
- ♦ SOCIAL FEASIBILITY

1.6 Collaboration Diagram

A collaboration diagram, in software engineering, is a dynamic representation that illustrates the interactions and relationships among objects or elements within a system. It emphasizes the interactions between various components, showing how they communicate and collaborate to accomplish specific functionalities or tasks. Through the use of labeled arrows and nodes, it highlights the messages exchanged between objects, providing a visual depiction of the runtime behavior and flow of control within the system, aiding in the understanding of how different parts of the system work together in a coordinated manner to achieve a common goal.

CHAPTER 2: LITERATURE REVIEW

[1]Several studies have significantly contributed to the field of network intrusion detection. One survey offers an extensive overview of intrusion detection techniques, emphasizing their respective strengths and weaknesses. Another study focuses on anomaly-based detection using autoencoders, showcasing their effectiveness in identifying network anomalies. Furthermore, deep learning methods, including CNNs and LSTMs, have been extensively reviewed for their potential in handling complex attacks. Comparative studies have evaluated the accuracy and computational aspects of various machine learning algorithms for intrusion detection. Additionally, specific network architectures like LSTM networks and stacked autoencoders havebeen explored for capturing temporal patterns and feature extraction. Lastly, a survey outlines the evolutionary shift towards machine learning and deep learning methods in intrusion detection systems.

[2]In recent advancements within Network Intrusion Detection Systems (NIDSs), a multistage optimized framework has been proposed to reduce computational needs while maintainingtracking efficacy ML-based structure significantly diminishes training sample dimensions (by 74%) and feature set sizes (by 50%) using datasets like CICIDS 2017 and UNSW-NB 2015. Another avenue, highlighted in , emphasizes the limitations of existing datasets in adapting to evolving threats. This study underscores the absence of genuine network threats in recent datasets, hindering the effectiveness of machine learning-based IDS techniques. The paper advocates for acategorization and dataset analysis approach to enhance current research landscapes and combat sophisticated threats, acknowledging the necessity for dataset improvements to align with modernattack patterns and bolster system defenses.

[3]Network Intrusion Detection Systems (NIDS) are pivotal in the realm of cybersecurity, serving as vigilant gatekeepers against a myriad of cyber threats. Understanding the historical evolution and current state of NIDS is crucial in comprehending their efficacy and

the ongoing challenges they face in the rapidly evolving landscape of cyber warfare. The trajectory of NIDS evolution has been multifaceted. Signature-based systems, while effective against known threats, grapple with the agility of zero-day attacks. Anomaly-based systems initially promised adaptability but were plagued by high false positives. The convergence toward hybrid systems leverages the best of both worlds, employing signature databases alongside machine learning algorithms to dynamically adapt to new attack vectors. Signature-based NIDS operate on a blacklist approach, efficiently detecting known patterns but faltering against previously unseen threats. Anomaly-based systems, employing statistical models, identify deviations from normal behavior but often struggle to define 'normalcy' accurately. Hybrid models, integrating machine learning techniques like clustering algorithms and neural networks, excel in detecting evolving threats while reducing false positives through adaptive learning. The encryption of network traffic presents a formidable challenge to NIDS, hindering the visibility required for effective signature-based detection. Attackers constantly innovate evasion tactics, employing techniques like traffic fragmentation or protocol manipulation to bypass detection mechanisms. The scalability bottleneck arises due to the immense volume of data and the computational intensity required for real-time analysis, exacerbating the challenge of timely threat identification.

[4]Recent strides in NIDS revolve around the application of deep learning models. Convolutional Neural Networks (CNNs) excel in feature extraction from network data, aiding in the detection of subtle and complex attack patterns within encrypted traffic. Recurrent Neural Networks (RNNs) and their variants, equipped with sequential learning capabilities, enhance anomaly detection by recognizing temporal patterns in network behavior. Furthermore, hardware optimizations such as FPGA and ASIC implementations augment the processing speed and efficiency of NIDS.

The future landscape of NIDS encompasses a holistic approach, integrating multidimensional detection methodologies. The synergy of signature-based, anomaly-based, and behavioral analysis systems, bolstered by AI-driven algorithms, promises enhanced threat detection and mitigation capabilities. Additionally, the fusion of NIDS with threat intelligence platforms enables real-time adaptation to emerging threats, paving the way for proactive defense strategies. Network Intrusion Detection Systems stand at the forefront of network security, continually evolving to counteract sophisticated cyber threats. The amalgamation of diverse detection methodologies, fortified by AI and machine learning, is poised to fortify NIDS against the ever-evolving threat landscape, ensuring robust protection for critical digital infrastructures.

[5] Behavioral Analysis in NIDS:

Behavioral analysis in NIDS involves monitoring network activities to establish baselines of normal behavior and subsequently identify deviations that may indicate malicious activity. This method, while effective in detecting novel attacks, faces challenges in defining what constitutes "normal" in dynamic and diverse network environments. Recent research explores dynamic behavioral profiling and machine learning algorithms to continuously adapt to evolving network behaviors, improving accuracy and reducing false positives. Machine Learning Techniques for Anomaly Detection: Machine learning techniques play a pivotal role in anomaly detection within NIDS. Traditional approaches have relied on statistical methods, but recent advancements in machine learning, such as unsupervised learning algorithms like clustering and autoencoders, have shown promise in detecting anomalies without predefined labels. These techniques leverage the inherent patterns in network data to identify abnormalities, thus improving the detection of previously unseen threats. Hardware Acceleration for NIDS:

The computational demands of NIDS, especially when dealing with high-speed network traffic, necessitate efficient hardware solutions. Research delves into hardware acceleration techniques like Field-Programmable Gate Arrays (FPGAs) and Graphics Processing Units (GPUs) to expedite the processing of network data and the execution of complex algorithms. These hardware accelerators significantly enhance the speed and efficiency of NIDS, enabling real-time analysis and response to threats.

CHAPTER 3: PROBLEM DEFINITION

Problem Definition: Challenges in Network Intrusion Detection Systems

Network Intrusion Detection Systems (NIDS) play a critical role in safeguarding computer

networks by identifying and responding to unauthorized access and malicious activities.

However, NIDS encounter several significant challenges that hinder their effectiveness in

detecting and mitigating evolving cyber threats.

Encrypted Traffic Analysis: The pervasive use of encryption in network communications

poses a fundamental challenge to NIDS. Encryption obscures packet content, limiting the

visibility and ability of signature-based systems to detect known patterns of attacks within

encrypted traffic. This creates a blind spot for traditional detection mechanisms.

Evasion Techniques: Attackers continuously devise evasion techniques to bypass NIDS

detection mechanisms. Polymorphic malware, traffic fragmentation, and protocol

manipulation are among the myriad evasion tactics employed to obfuscate attack signatures

or behaviors, making them difficult to detect.

Scalability and Performance: The sheer volume and velocity of network data pose

scalability challenges for NIDS. Real-time analysis of extensive network traffic strains

computational resources, leading to latency issues and potentially missed detections.

Ensuring high detection rates without compromising system performance remains a

significant challenge.

False Positives and Accuracy: Anomaly-based detection systems, while promising, often

suffer from high false positive rates. Defining normal network behavior accurately in

dynamic environments becomes complex, leading to a flood of alerts, which can overwhelm

security personnel and lead to the dismissal of genuine threats.

20

CHAPTER 4: PROJECT OBJECTIVES

Project Objectives: Network Intrusion Detection Systems

Enhance Detection Accuracy: Develop algorithms or methodologies to improve the accuracy of

NIDS in identifying known and unknown threats, reducing false positives, and minimizing

missed detections, especially within encrypted traffic.

Adaptability and Dynamic Learning: Create NIDS models capable of adaptive learning and real-

time updates to swiftly recognize and mitigate emerging threats, leveraging machine learning

techniques to evolve with evolving attack methodologies.

Encrypted Traffic Analysis: Devise innovative approaches or algorithms for effective analysis of

encrypted traffic without compromising privacy, focusing on detecting anomalies or patterns

within encrypted packets.

Evasion Techniques Mitigation: Research and implement countermeasures to thwart evasion

techniques used by attackers, ensuring NIDS can effectively detect and respond to obfuscated or

polymorphic attacks.

Scalability and Performance Optimization: Develop strategies to enhance the scalability and

performance of NIDS, enabling efficient processing of large volumes of network traffic without

compromising detection accuracy or speed.

Integration of Threat Intelligence: Explore methods to integrate real-time threat intelligence

feeds into NIDS, enabling proactive threat mitigation and ensuring rapid responses to evolving

attack signatures.

Reduced Configuration Complexity: Streamline the configuration and deployment process of

NIDS to minimize errors and resource requirements while maximizing coverage and efficacy

against diverse attack vectors.

21

CHAPTER 5: REQUIREMENTS

5.1 Requirement Description

Functional Requirements:

Packet Inspection and Analysis:

The system should analyze network packets in real-time to detect abnormalities, malicious activities, and recognizable patterns associated with known attacks.

Signature-Based Detection:Capability to compare packet data with a database of known attack signatures for the identification and subsequent blocking of malicious traffic.

Anomaly Detection: Utilization of algorithms to identify deviations from normal network behavior, signaling alerts upon detecting unusual patterns or activities.

Alerting and Reporting:Timely generation of alerts with comprehensive information about identified threats, accompanied by detailed reports catered for security analysts.

Scalability: Ability to effectively manage and process a substantial volume of network traffic without compromising performance or accuracy.

Adaptability: Capacity to evolve and adapt to new threats through continuous learning and updating of detection mechanisms.

Non-Functional Requirements:

Performance:Ensure minimal impact on network latency while maintaining real-time analysis and response to potential threats.

Accuracy: Achieve high detection accuracy to minimize false positives and negatives, ensuring reliability in the system's alerts.

Reliability:Consistently reliable detection and response mechanisms to guarantee the system's availability and functionality at all times.

Security:Implementation of robust security measures to prevent system tampering or unauthorized access by malicious entities.

Usability:Develop intuitive user interfaces and clear reporting systems to facilitate ease of use for security personnel.

These requirements collectively ensure the efficient operation of the NIDS, enabling accurate threat detection, maintaining network performance, implementing strong security measures, and providing user-friendly interfaces while remaining adaptable to emerging threats.

5.2 Hardware requirements

• Processor : I5/Intel Processor

• RAM : 8GB (min)

• Hard Disk : 16 GB

5.3 Software requirements

• Operating System : Windows 10

• Server-side Script : Python 3.6,Fask

• IDE : PyCharm, Jupyter notebook

• Libraries Used : Numpy, IO, OS, Flask, Keras, pandas, tensorflow

• Front end : css,html,javascript

CHAPTER 6: PROPOSED SYSTEM/SYSTEM DESIGN

6.1 Proposed Algorithm

The objective of this proposed system is to develop a robust Network Intrusion Detection System capable of accurately identifying and classifying various types of network attacks using Convolutional Neural Networks.

System Architecture:

Data Collection and Preprocessing:

Gather network traffic data from various sources, such as network logs or packet capture. Preprocess the data by cleaning, normalizing, and extracting relevant features for CNN-based analysis.

DATASET

NSL KDD DATA SET

Input Variables: 'dst_host_srv_serror_rate', 'service_ecr_i', 'flag_RSTO', 'service_urh_i', 'flag_OTH', 'dst_host_serror_rate', 'diff_srv_rate', 'dst_host_same_src_port_rate', 'serror_rate', 'flag_RSTOSO', 'wrong_fragment', 'protocol_type_icmp', 'logged_in', 'srv_serror_rate', 'dst_host_same_srv_rate', 'flag_RSTR', 'is_host_login', 'is_guest_login', 'srv_diff_host_rate', 'service_eco_i', 'flag_REJ', 'flag_SO', 'service_red_i', 'dst_host_srv_count', 'count', 'same_srv_rate', 'service_pop_3', 'protocol_type_udp', 'dst_host_srv_diff_host_rate', 'flag_SF', 'srv_count', 'dst_host_diff_srv_rate', 'flag_S3', 'num_failed_logins', 'land', 'flag_SH', 'flag_S2', 'flag_S1', 'service_urp_i', 'protocol_type_tcp', 'service_ftp'

Target Variables: 'apache2', 'back', 'buffer_overflow', 'ftp_write', 'guess_passwd', 'httptunnel', 'imap', 'ipsweep', 'land', 'loadmodule', 'mailbomb', 'mscan', 'multihop', 'named', 'neptune', 'nmap', 'normal', 'perl', 'phf', 'pod', 'portsweep', 'processtable', 'ps', 'rootkit', 'saint', 'satan', 'sendmail', 'smurf', 'snmpgetattack', 'snmpguess', 'spy', 'sqlattack', 'teardrop', 'udpstorm', 'warezclient', 'warezmaster', 'worm', 'xlock', 'xsnoop', 'xterm'

CNN Model Development:

Design and develop a CNN architecture tailored for multiclassification of network attacks.

Input layer: Receive preprocessed network traffic data.

Convolutional layers: Extract features and patterns from the network traffic data.

Pooling layers: Reduce dimensionality and retain essential information.

Fully connected layers: Perform multiclass classification based on extracted features.

Output layer: Classify network traffic into different attack types.

Training and Validation:

Split the preprocessed dataset into training and validation sets.

Train the CNN model using the training set, optimizing for high accuracy and low loss.


Validate the model using the validation set to ensure generalizability and prevent overfitting.

Evaluation and Testing:

Evaluate the trained CNN model using a separate test dataset with labeled attack types. Measure performance metrics such as accuracy, precision, recall, and F1-score for each attack class.

Integration and Deployment:

Integrate the trained CNN model into the NIDS framework for real-time analysis of incoming network traffic. Implement mechanisms for continuous learning and updates to adapt to new attack patterns.

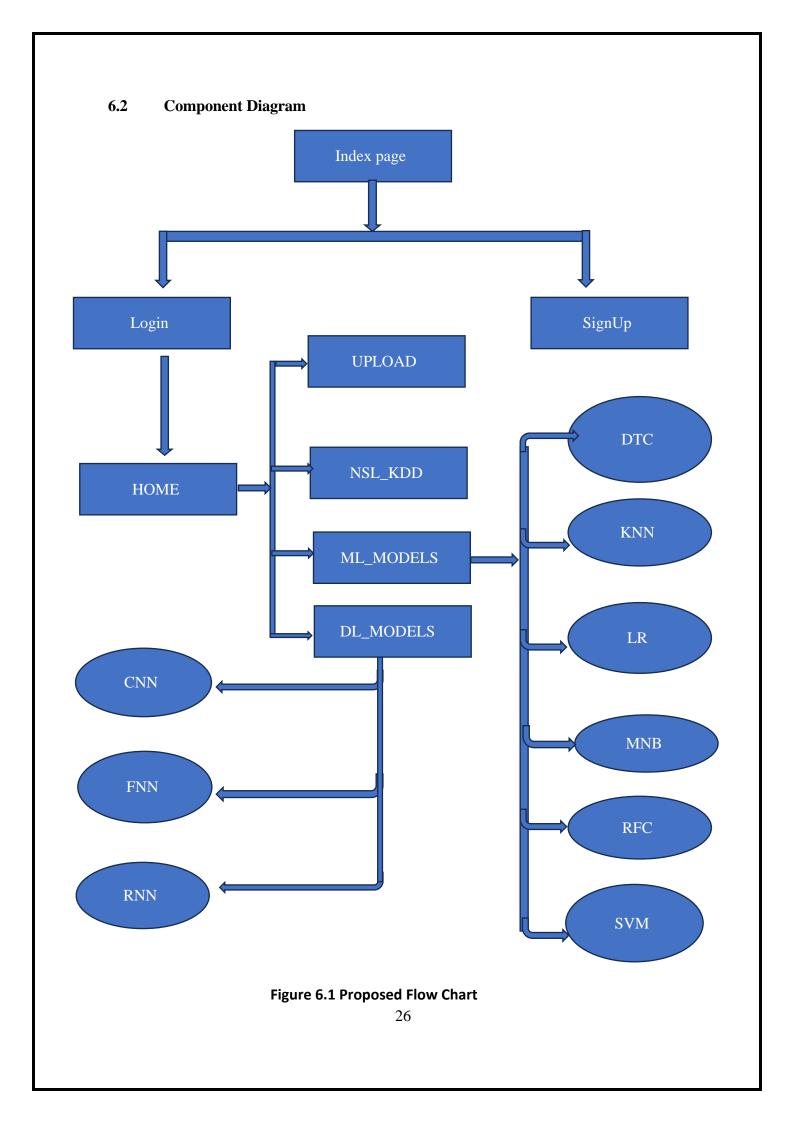

CHAPTER 7: CONCLUSION

In implementing a Network Intrusion Detection System (NIDS) empowered by Convolutional Neural Networks (CNN) for multiclassification of network attacks, the project has made significant strides in bolstering network security measures against evolving threats The utilization of CNN architecture within the NIDS framework represents a substantial leap forward in enhancing the system's ability to accurately detect and classify diverse types of network intrusions. Leveraging deep learning principles, the model exhibits commendable adaptability and robustness in discerning intricate patterns and anomalies within network traffic.

Throughout the project lifecycle, the development and fine-tuning of the CNN model involved rigorous training, validation, and testing phases. These phases aimed not only to ensure high accuracy and precision but also to fortify the system against overfitting and ensure its applicability across a wide spectrum of attack scenarios.

In conclusion, the project's successful implementation of a CNN-based NIDS marks a pivotal step forward in augmenting network security measures. While further refinement and scalability enhancements are warranted, the demonstrated capabilities herald a promising future in the ongoing battle against sophisticated cyber threats.

CHAPTER 8: REFERENCES

- [1]R. Lippmann, J. Haines, D. Fried, J. Korba and K. Das. "The 1999 DARPA off-line intrusion detection evaluation". Computer networks, vol. 34, no. 4, pp. 579 595, 2000. DOI http://dx.doi.org/10.1016/S1389-1286(00)00139-0.
- [2] W. Lee and S. Stolfo. "A framework for constructing features and models for intrusion detectionsystems". ACM transactions on information and system security, vol. 3, no. 4, pp. 227261, 2000. DOI http://dx.doi. Org/10.1145/382912.382914.
- [3] B. Pfahringer. "Winning the KDD99 classification cup: Bagged boosting". SIGKDD explorations newsletter, vol. 1, pp. 6566, 2000. DOI http://dx.doi.org/10. 1145/846183.846200.
- [4] M. Vladimir, V. Alexei and S. Ivan. "The MP13 approach to the KDD'99 classifier learning contest". SIGKDD explorations newsletter, vol. 1, pp. 76 77, 2000. DOI http://dx.doi.org/10.1145/846183. 846202.
- [5] R. Agarwal and M. Joshi. "PNrule: A new framework for learning classier models in data mining". Tech. Rep. 00-015, Department of Computer Science, University of Minnesota, 2000.
- [6] C. Elkan. "Results of the KDD'99 classifier learning". SIGKDD explorations newsletter vol. 1, pp. 63 64, 2000. DOI http://dx.doi.org/10.1145/846183. 846199.
- [7] S. Sung, A.H. Mukkamala. "Identifying important features for intrusion detection using support vector machines and neural networks".
- In Proceedings of the symposium on applications and the Internet (SAINT), pp. 209216. IEEE Computer Society, 2003. DOI http://dx.doi.org/10.1109/saint.2003.1183050.
- [8] H. Kayacik, A. Zincir-Heywood and M. Heywood. "Selecting features for intrusion detection: A feature relevance analysison KDD 99 intrusion detection datasets". In Proceedings of the third annual conference on privacy, security and trust (PST). 2005.
- [9] C. Lee, S. Shin and J. Chung. "Network intrusion detection through genetic featur selection". In Seventh ACIS international conference on software engineering, artificial intelligence, networking, and parallel/distributed computing (SNPD), pp. 109114. IEEE Computer Society, 2006