


QT_function_other/ros
_tcp_sender.cpp

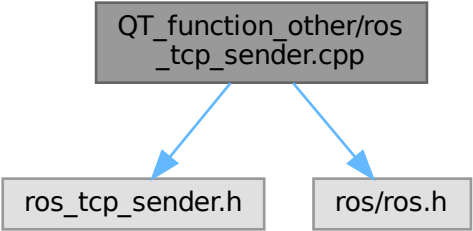

```
graph TD; A[QT_function_other/ros_tcp_sender.cpp] --> B[ros_tcp_sender.h]; A --> C[ros/ros.h]
```

The diagram illustrates the dependencies of the source file `QT_function_other/ros_tcp_sender.cpp`. Two blue arrows originate from the bottom of the top box and point to the two boxes below it, indicating that the source file depends on both header files.

ros_tcp_sender.h

ros/ros.h