## BI / read / 13

BI 1
BI 2
BI 3
BI 4
BI 5
BI 6
BI 7
BI 8
BI 9
BI 10
BI 11
BI 12
BI 13
BI 14
BI 15
BI 16
BI 17
BI 18
BI 19
BI 20

| | |
|---|---|
| query | BI / read / 13 |
| title | Zombies in a country |
| pattern | 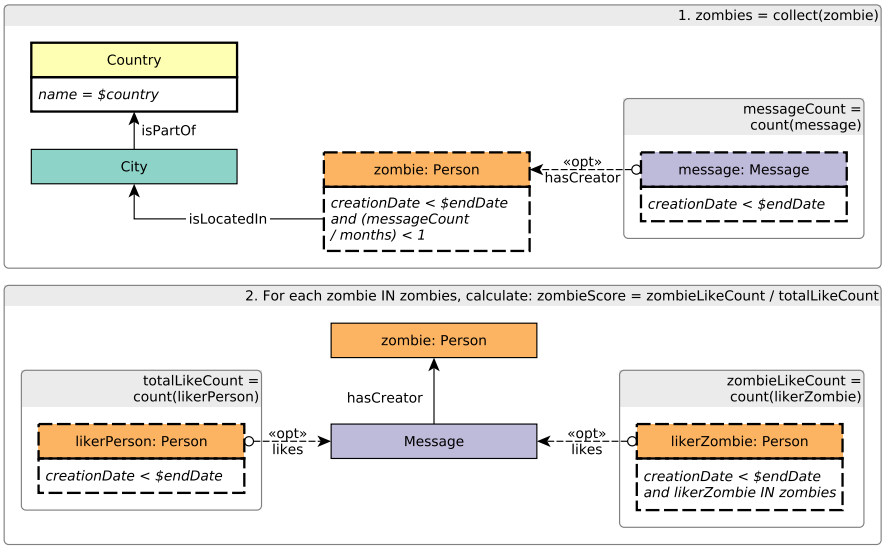  |
| desc. | Find zombies within the given `country`, and return their zombie scores. A `zombie` is a Person created before the given `endDate`, which has created an average of `[0, 1)` Messages per month, during the time range between profile's `creationDate` and the given `endDate`. The number of months spans the time range from the `creationDate` of the profile to the `endDate` with partial months on both end counting as one month (e.g. a `creationDate` of Jan 31 and an `endDate` of Mar 1 result in 3 months).<br>For each `zombie`, calculate the following:<br>• `zombieLikeCount`: the number of likes received from other zombies.<br>• `totalLikeCount`: the total number of likes received.<br>• `zombieScore`: `zombieLikeCount` / `totalLikeCount`. If the value of `totalLikeCount` is 0, the `zombieScore` of the `zombie` should be 0.0.<br>For both `zombieLikeCount` and `totalLikeCount`, only consider likes received from profiles that were created before the given `endDate`. |

params

| | | | |
|---|---|---|---|
| 1 | country | Long String | Only the largest Countries are selected |
| 2 | endDate | Date | Selected from the last days of the initial data set. |

result

| | | | | |
|---|---|---|---|---|
| 1 | zombie.id | ID | R | |
| 2 | zombieLikeCount | 32-bit Integer | A | |
| 3 | totalLikeCount | 32-bit Integer | A | |
| 4 | zombieScore | 64-bit Float | A | Determined as `zombieLikeCount` / `totalLikeCount` |

sort

| | | | |
|---|---|---|---|
| 1 | zombieScore | ↓ | |
| 2 | zombie.id | ↑ | |

| | |
|---|---|
| limit | 100 |
| CPs | 1.2, 2.1, 2.3, 2.4, 3.2, 3.3, 4.2, 5.1, 5.3, 8.2, 8.4, 8.5 |