## BI / read / 14

BI 1
BI 2
BI 3
BI 4
BI 5
BI 6
BI 7
BI 8
BI 9
BI 10
BI 11
BI 12
BI 13
BI 14
BI 15
BI 16
BI 17
BI 18
BI 19
BI 20

| | |
|---|---|
| query | BI / read / 14 |
| title | International dialog |
| pattern | 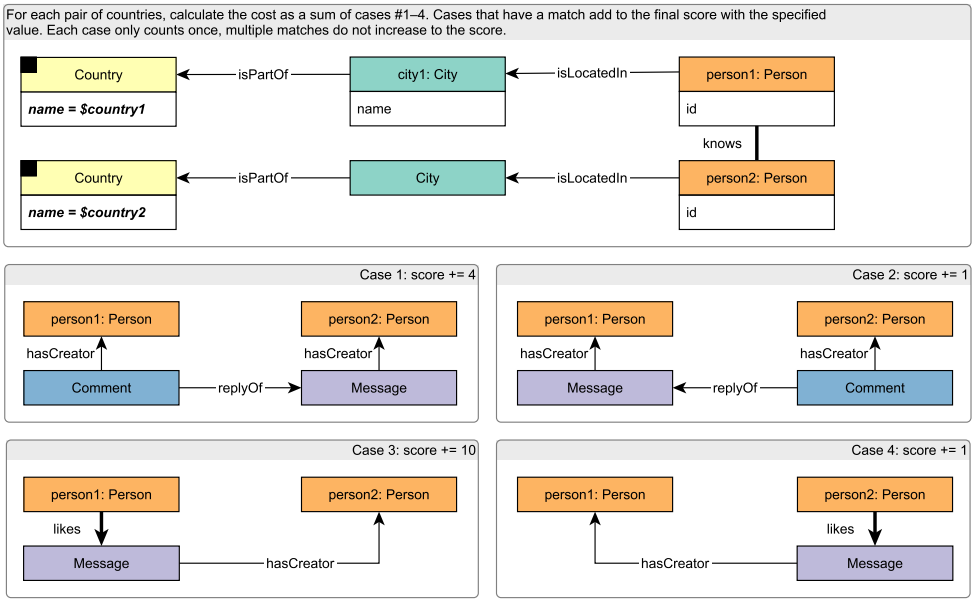  |
| description | Consider all pairs of people `(person1, person2)` such that (1) they know each other, (2) one is located in a City of `$country1`, and (3) the other is located in a City of `$country2`. For each City of `$country1`, return the highest scoring pair. If there are multiple top-scoring pairs in a city, return the pair with the lowest (`person1.id`, `person2.id`) using a lexicographical ordering.<br>The score of a pair is defined as the sum of the subscores awarded for the following kinds of interaction. The initial value is `score = 0`.<br>1. `person1` has created a reply Comment to at least one Message by `person2`: `score += 4`<br>2. `person1` has created at least one Message that `person2` has created a reply to: `score += 1`<br>3. `person1` liked at least one Message by `person2`: `score += 10`<br>4. `person1` has created at least one Message that was liked by `person2`: `score += 1`<br>Consequently, the maximum score a pair can obtain is: `4 + 1 + 10 + 1 = 16`. |

**params**

| | | | |
|---|---|---|---|
| 1 | $country1 | Long String | (a) Correlated with parameter `country2`, i.e. the Countries are close and there are many Persons knowing each other<br>(b) Uncorrelated with parameter `country2`, i.e. the Countries are afar and there are few Persons knowing each other |
| 2 | $country2 | Long String | |

**result**

| | | | | |
|---|---|---|---|---|
| 1 | person1.id | ID | R | |
| 2 | person2.id | ID | R | |
| 3 | city1.name | Long String | R | |
| 4 | score | 32-bit Integer | C | |

**sort**

| | | | |
|---|---|---|---|
| 1 | score | ↓ | |
| 2 | person1.id | ↑ | |
| 3 | person2.id | ↑ | |

| | |
|---|---|
| limit | 100 |
| CPs | 1.3, 1.4, 2.1, 3.1, 3.3, 5.1, 5.2, 5.3, 8.3, 8.4 |