BI / read / 14

BI 1
BI 2
BI 3
BI 4
BI 5
BI 6
BI 7
BI 8
BI 9
BI 10
BI 11
BI 12
BI 13
BI 14
BI 15
BI 16
BI 17
BI 18
BI 19
BI 20

query	BI / read / 14
title	International dialog
pattern	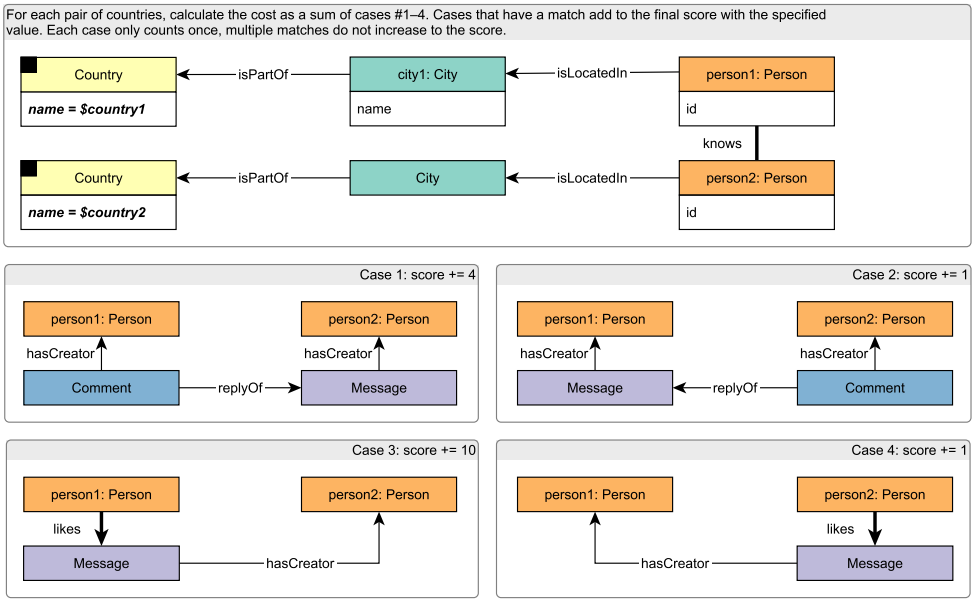
description	Consider all pairs of people `(person1, person2)` such that (1) they know each other, (2) one is located in a City of `$country1`, and (3) the other is located in a City of `$country2`. For each City of `$country1`, return the highest scoring pair. If there are multiple top-scoring pairs in a city, return the pair with the lowest (`person1.id`, `person2.id`) using a lexicographical ordering. The score of a pair is defined as the sum of the subscores awarded for the following kinds of interaction. The initial value is `score = 0`. 1. `person1` has created a reply Comment to at least one Message by `person2`: `score += 4` 2. `person1` has created at least one Message that `person2` has created a reply to: `score += 1` 3. `person1` liked at least one Message by `person2`: `score += 10` 4. `person1` has created at least one Message that was liked by `person2`: `score += 1` Consequently, the maximum score a pair can obtain is: `4 + 1 + 10 + 1 = 16`.
params	1 `$country1` Long String — (a) Correlated with parameter `country2`, i.e. the Countries are close and there are many Persons knowing each other (b) Uncorrelated with parameter `country2`, i.e. the Countries are afar and there are few Persons knowing each other 2 `$country2` Long String
result	1 `person1.id` ID R 2 `person2.id` ID R 3 `city1.name` Long String R 4 `score` 32-bit Integer C
sort	1 `score` ↓ 2 `person1.id` ↑ 3 `person2.id` ↑
limit	100
CPs	1.3, 1.4, 2.1, 3.1, 3.3, 5.1, 5.2, 5.3, 8.3, 8.4