# BI / read / 14

| | |
|---|---|
| query | BI / read / 14 |
| title | International dialog |
| pattern | 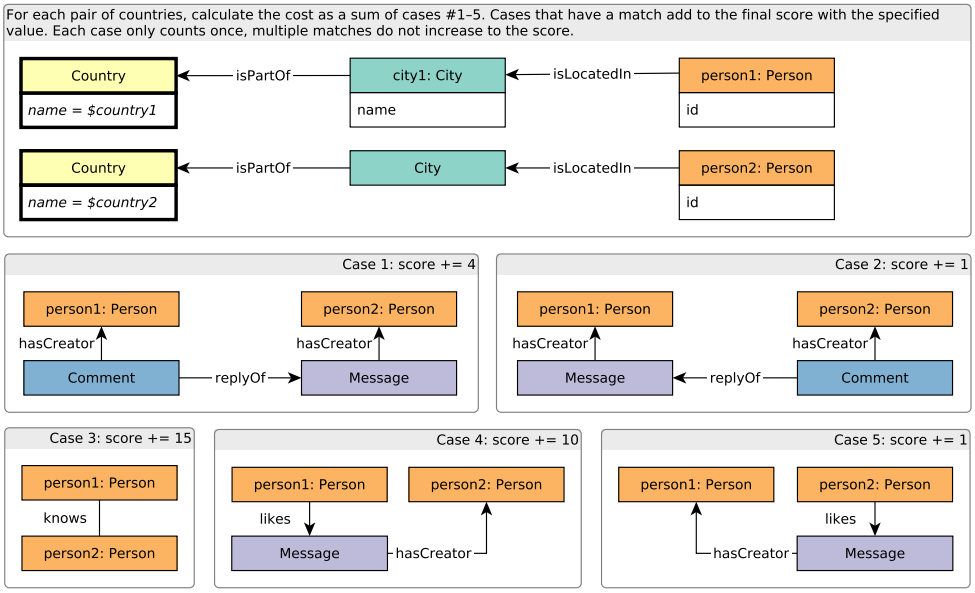 |
| desc. | Consider all pairs of people `(person1, person2)` such that one is located in a City of Country `country1` and the other is located in a City of Country `country2`. For each City of Country `country1`, return the highest scoring pair. The score of a pair is defined as the sum of the subscores awarded for the following kinds of interaction. The initial value is `score = 0`.<br>1. `person1` has created a reply Comment to at least one Message by `person2`: `score += 4`<br>2. `person1` has created at least one Message that `person2` has created a reply to: `score += 1`<br>3. `person1` and `person2` know each other: `score += 15`<br>4. `person1` liked at least one Message by `person2`: `score += 10`<br>5. `person1` has created at least one Message that was liked by `person2`: `score += 1`<br>Consequently, the maximum score a pair can obtain is: `4 + 1 + 15 + 10 + 1 = 31`.<br>This query has two variants based on whether the input parameters are selected as correlated (close countries) or uncorrelated (far countries). |

**params**

| | | | |
|---|---|---|---|
| 1 | country1 | Long String | A: correlated with parameter country2, i.e. the countries are close and there are many Persons visiting both Countries.<br>B: uncorrelated with parameter country2, i.e. the countries are afar and there are few Persons visiting both Countries. |
| 2 | country2 | Long String | |

**result**

| | | | | |
|---|---|---|---|---|
| 1 | person1.id | ID | R | |
| 2 | person2.id | ID | R | |
| 3 | city1.name | Long String | R | |
| 4 | score | 32-bit Integer | C | |

**sort**

| | | | |
|---|---|---|---|
| 1 | score | ↓ | |
| 2 | person1.id | ↑ | |
| 3 | person2.id | ↑ | |

| | |
|---|---|
| CPs | 1.3, 1.4, 2.1, 3.1, 3.3, 5.1, 5.2, 5.3, 8.3, 8.4 |