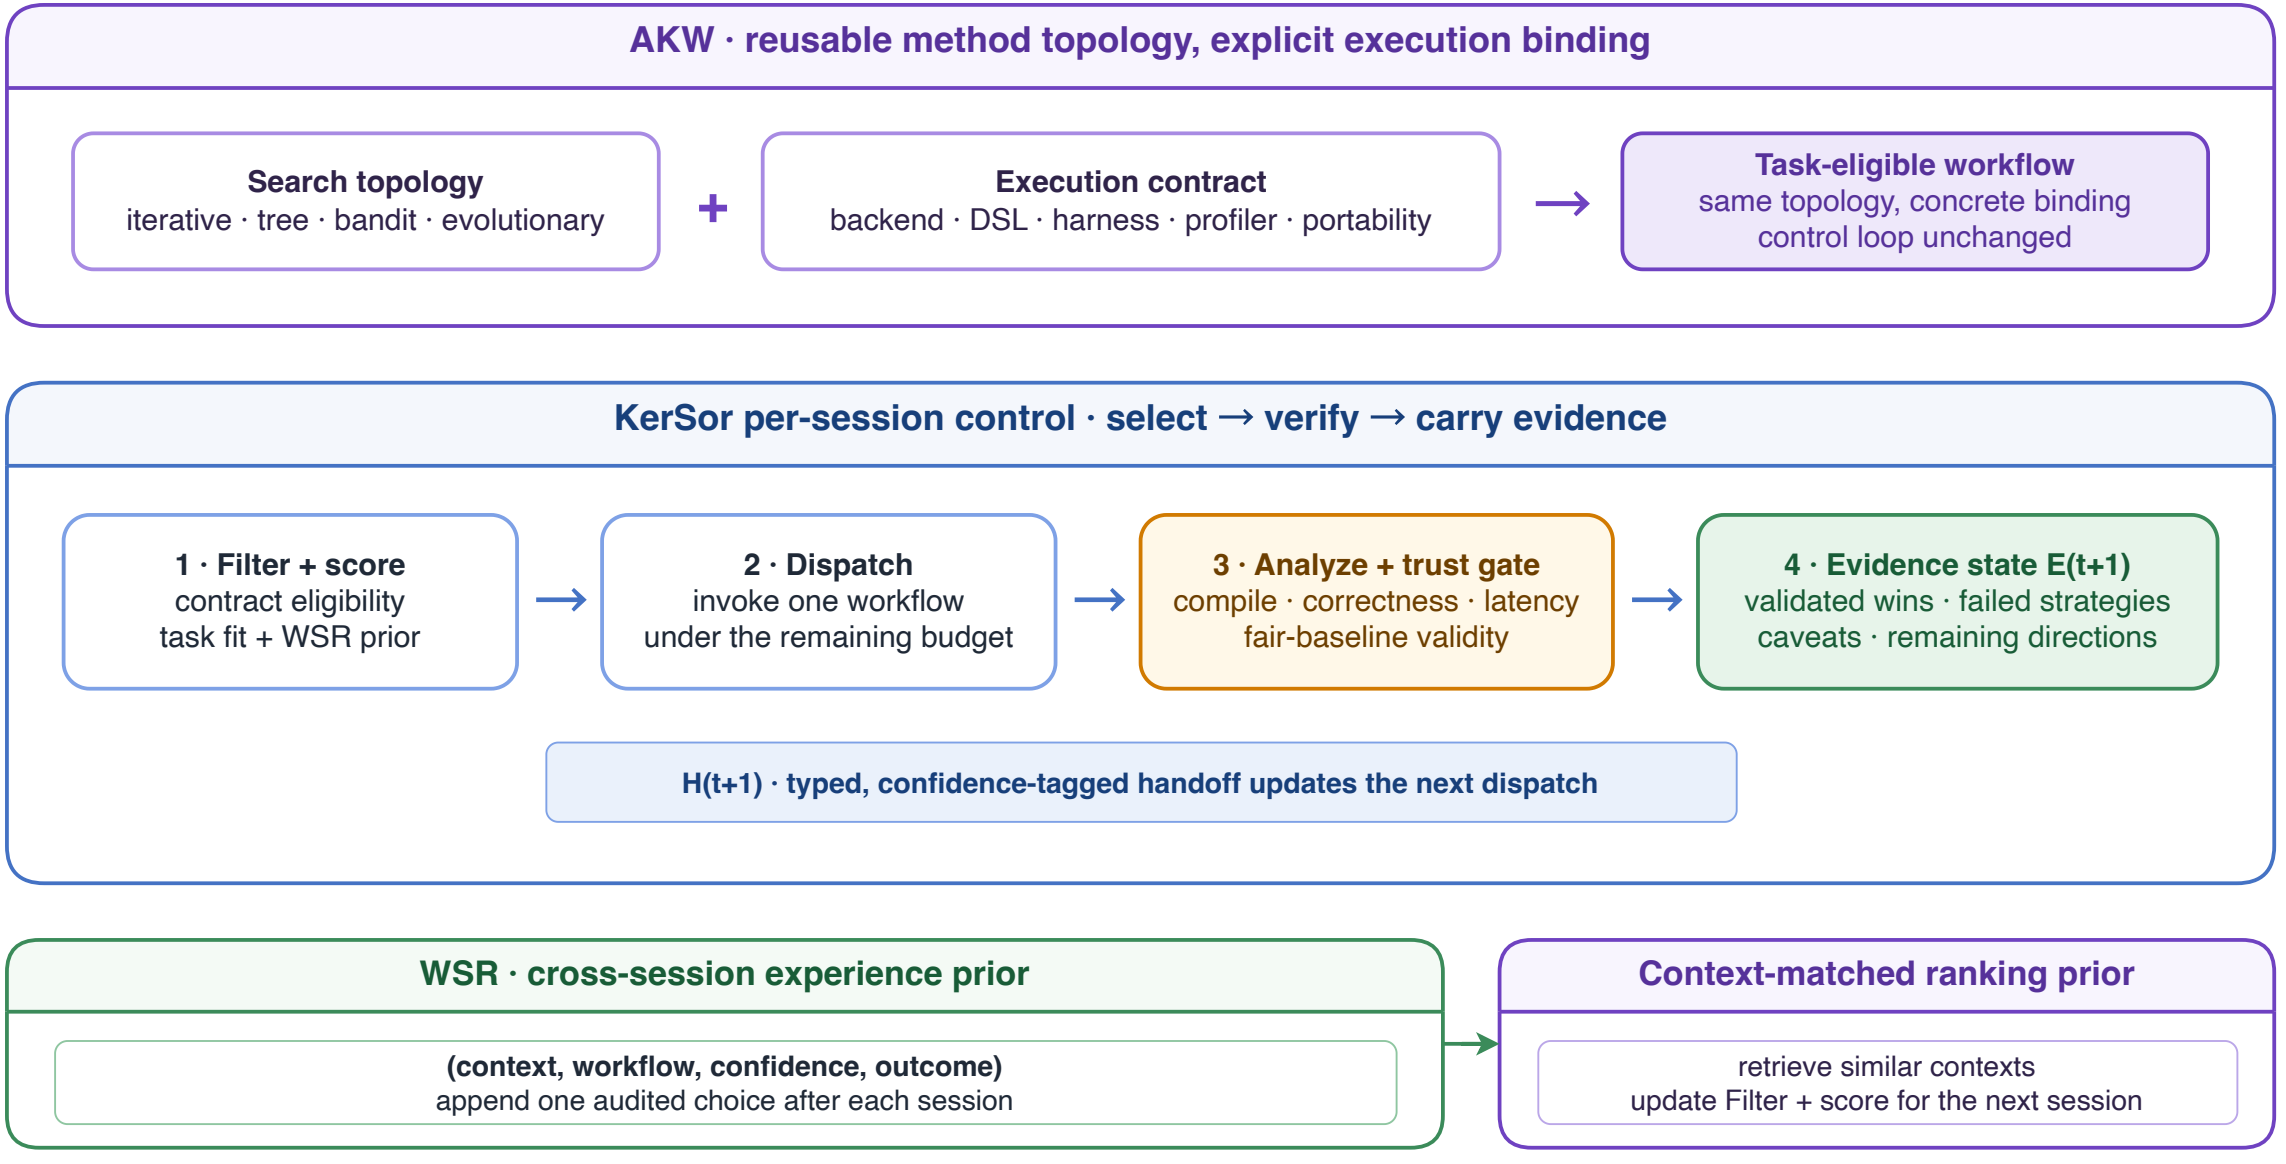

AKW · reusable method topology, explicit execution binding
Search topology
iterative · tree · bandit · evolutionary
+
Execution contract
backend · DSL · harness · profiler · portability
→
Task-eligible workflow
same topology, concrete binding
control loop unchanged
KerSor per-session control · select → verify → carry evidence
1 · Filter + score
contract eligibility
task fit + WSR prior
→
2 · Dispatch
invoke one workflow
under the remaining budget
→
3 · Analyze + trust gate
compile · correctness · latency
fair-baseline validity
→
4 · Evidence state E(t+1)
validated wins · failed strategies
caveats · remaining directions
H(t+1) · typed, confidence-tagged handoff updates the next dispatch
WSR · cross-session experience prior
(context, workflow, confidence, outcome)
append one audited choice after each session
Context-matched ranking prior
retrieve similar contexts
update Filter + score for the next session