```
In [1]: import numpy as np
        from scipy.integrate import odeint
        from scipy.optimize import curve_fit
        from scipy.optimize import differential evolution
        %matplotlib inline
        import matplotlib.pyplot as plt
        from matplotlib.backends.backend_pdf import PdfPages
        import pandas as pd
In [2]: from endpoint_maker import sqres
        from endpoint maker import func
        from endpoint maker import t
        from endpoint maker import new
        from endpoint maker import lightdata
        from endpoint maker import rawdata
In [3]: if name == ' main ':
            def initparams():
                bounds = ([0.00001,10000],[0,4],[0.00001,1000],[0.00001,1000],[0.00001,1000
                \#bounds = ([0.00001, 1000], [0.00001, 1000], [0.00001, 10000])
                result = differential evolution(sqres,bounds,maxiter=100,popsize=20,polish=
                return result
In [4]: initialp = initparams()
        print(initialp)
        message: Maximum number of iterations has been exceeded.
        success: False
            fun: 0.672396643854898
              x: [ 8.874e+03 1.181e+00 6.880e+02 1.293e+00 5.842e+02]
            nit: 100
           nfev: 10100
In [5]: def tester(t,Kd,n,d2,k2,k3,i):
        #def tester(t,d2,k2,k3,i):
            inivalues = [1,0,0,0,0,0,0]
            arrayvalues = np.asarray([])
            #for i in range(len(lightdata[:,0])):
            def I(t):
                tindex = t/5
                if tindex > 12241:
                    tindex = 12240
                return lightdata[i][int(tindex)]
            def odes(z,t,Kd,n,d2,k2,k3):
            #def odes(z,t,d2,k2,k3):
                Pu, Pb, Pa, mRNA, mCherry1, mCherry2, mCherry3 = z
                d1 = 0.019905
                k1 = 0.08299
                \#Kd = 90.41
                #n = 0.964487
                #d2 = 486.67
```

```
\#k2 = 6.597
                                              #k3= 0.0539
                                             d3 = 0.000077
                                              k4 = 1.25
                                             d4 = 0.000031
                                             k5 = 0.00283
                                             k6 = 0.00283
                                             Pu = z[0]
                                             Pb = z[1]
                                             Pa = z[2]
                                             mRNA = z[3]
                                              mCherry1 = z[4]
                                              mCherry2 = z[5]
                                              mCherry3 = z[6]
                                              dPudt = d1*Pb - k1*I(t)**n/(Kd**n+I(t)**n)*Pu
                                              dPbdt = k1*I(t)**n/(Kd**n+I(t)**n)*Pu - k2*I(t)**n/(Kd**n+I(t)**n)*Pb - d1**n*I(t)**n/(Kd**n+I(t)**n)*Pb - d1**n*I(t)**n/(Kd**n)*Pb - d1**n/(Kd**n)*Pb - d
                                              dPadt = k2*I(t)**n/(Kd**n+I(t)**n)*Pb - d2*Pa
                                              dmRNAdt = k3*I(t)**n/(Kd**n+I(t)**n)*Pa - d3*mRNA
                                              dmCherry1dt = k4*mRNA-(d4 + k5)*mCherry1
                                              dmCherry2dt = k5*mCherry1-(d4+k6)*mCherry2
                                              dmCherry3dt = k6*mCherry2 - d4*mCherry3
                                              return [dPudt,dPbdt,dPadt,dmRNAdt,dmCherry1dt,dmCherry2dt,dmCherry3dt]
                                  solver = odeint(odes,inivalues,t,args = (Kd,n,d2,k2,k3),hmax=0.1)
                                  #solver = odeint(odes,inivalues,t,args = (d2,k2,k3),hmax=0.1)
                                  mCherryout = solver[:,6]
                                  #mCherryout = mCherryout[0:24480:240]
                                  return mCherryout
In [6]: print(initialp.x)
                   [8.87350228e+03 1.18130931e+00 6.87991313e+02 1.29332441e+00
                      5.84234013e+02]
In [7]: popt, covt = curve_fit(func,t,new,initialp.x,maxfev=1000000)
                       \#popt, covt = curve\ fit(func,t,newdata,initialp.x, <math>maxfev=10000000, bounds=((0.0000)
                        #popt, covt = curve_fit(func,t,newdata,initialp.x, maxfev=1000000)
                       Kd,n,d2,k2,k3 = popt
```

#d3, k4, d4, k5, k6 = popt

print('Kd=',Kd,'n=',n,'d2=',d2,'k2=',k2,'k3=',k3)

#print('d3=',d3,'k4=',k4,'d4=',d4,'k5=',k5,'k6=',k6)

```
#d2,k2,k3 = popt
#print('d2=',d2,'k2=',k2,'k3=',k3)
```

Kd= 8873.484615561883 n= 1.181310436487518 d2= 687.9904673388729 k2= 1.2933216307394 944 k3= 584.2350655936098

```
In [8]: import sys
        import numpy
        \#params = [1,1,1,1,1,1,1]
        params = [1,1,1,1,1]
        numpy.set_printoptions(threshold=10)
        model1 = np.asarray(func(t,Kd,n,d2,k2,k3))
        \#model1 = np.asarray(func(t,d2,k2,k3))
        print(len(model1))
        #print(model1)
        \#a,b,c,d,e,f,g = params
        a,b,c,d,e = params
        ydata = np.asarray(new)
        print(len(ydata))
        ssr = np.sum((ydata-model1)**2)
        #ssr2 = np.sum((ydata-model2)**2)
        sst = np.sum((ydata - np.mean(ydata))**2)
        R2 = 1 - ssr/sst
        \#R2\ 2 = 1 - ssr2/sst
        print('R2 is: ', R2)
        #print(R2 2)
       102
       102
       R2 is: 0.3720082231681805
In [9]: pp = PdfPages('multipage.pdf')
        ydata = np.asarray(new)
        \#condition = [1,2,3,4,5,6,7,8,9]
        for i in range(2):
            model = tester(t,Kd,n,d2,k2,k3,i)
            #model = tester(t, d2, k2, k3, i)
            #print(model)
            \#a,b,c,d,e,f,g= params
            a,b,c,d,e= params
```

#print(model)

plt.legend()
pp.savefig()
plt.show()

#print(rawdata[i])

plt.plot(t,model,'.', label = 'model')


#t = np.linspace(0,34800, num=6961)

plt.plot(t,raw[i],'.',label = 'data')

#raw = rawdata[0:13920:240]

```
pp.close
```

205

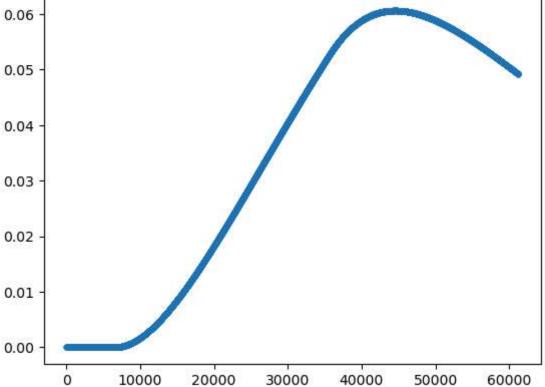

In []: