```
In [1]: import numpy as np
        from scipy.integrate import odeint
        from scipy.optimize import curve_fit
        from scipy.optimize import differential evolution
        %matplotlib inline
        import matplotlib.pyplot as plt
        from matplotlib.backends.backend_pdf import PdfPages
        import pandas as pd
In [2]: from endpoint_maker import sqres
        from endpoint maker import func
        from endpoint maker import t
        from endpoint maker import new
        from endpoint maker import lightdata
        from endpoint maker import rawdata
In [3]: if name == ' main ':
            def initparams():
                 \#bounds = ([0.00001,10000],[0,4],[0.00001,1000],[0.00001,1000],[0.00001,100
                 bounds = ([0.00001, 1000], [0.00001, 1000], [0.00001, 10000])
                 result = differential evolution(sqres,bounds,maxiter=100,popsize=20,polish=
                 return result
In [4]: initialp = initparams()
        print(initialp)
        message: Maximum number of iterations has been exceeded.
        success: False
            fun: 2.9696749412043038
              x: [ 3.435e+02 2.782e+02 3.100e+03]
            nit: 100
           nfev: 6060
In [5]: #def tester(t,Kd,n,d2,k2,k3,i):
        def tester(t,d2,k2,k3,i):
            inivalues = [1,0,0,0,0,0,0]
            arrayvalues = np.asarray([])
            #for i in range(len(lightdata[:,0])):
            def I(t):
                tindex = t/5
                 if tindex > 12241:
                    tindex = 12240
                 return lightdata[i][int(tindex)]
            \#def\ odes(z,t,Kd,n,d2,k2,k3):
            def odes(z,t,d2,k2,k3):
                 Pu, Pb, Pa, mRNA, mCherry1, mCherry2, mCherry3 = z
                 d1 = 0.019905
                k1 = 0.08299
                 Kd = 90.41
                 n = 0.964487
                 #d2= 486.67
```

#k2= 6.597 #k3= 0.0539

```
d3 = 0.000077
                 k4 = 1.25
                 d4 = 0.000031
                 k5 = 0.00283
                 k6 = 0.00283
                 Pu = z[0]
                 Pb = z[1]
                 Pa = z[2]
                 mRNA = z[3]
                 mCherry1 = z[4]
                 mCherry2 = z[5]
                 mCherry3 = z[6]
                 dPudt = d1*Pb - k1*I(t)*Pu
                 dPbdt = k1*I(t)*Pu - k2*Pb - d1*Pb + d2*Pa
                 dPadt = k2*Pb - d2*Pa
                 dmRNAdt = k3*Pa - d3*mRNA
                 dmCherry1dt = k4*mRNA-(d4 + k5)*mCherry1
                 dmCherry2dt = k5*mCherry1-(d4+k6)*mCherry2
                 dmCherry3dt = k6*mCherry2 - d4*mCherry3
                 return [dPudt,dPbdt,dPadt,dmRNAdt,dmCherry1dt,dmCherry2dt,dmCherry3dt]
            \#solver = odeint(odes,inivalues,t,args = (Kd,n,d2,k2,k3),hmax=0.1)
            solver = odeint(odes,inivalues,t,args = (d2,k2,k3),hmax=0.1)
            mCherryout = solver[:,6]
            #mCherryout = mCherryout[0:24480:240]
            return mCherryout
In [6]: print(initialp.x)
       [ 343.52779204 278.17208326 3099.88597223]
In [7]: popt, covt = curve_fit(func,t,new,initialp.x,maxfev=1000000)
        \#popt, covt = curve_fit(func,t,newdata,initialp.x, <math>maxfev=10000000, bounds=((0.0000)
        #popt, covt = curve fit(func,t,newdata,initialp.x, maxfev=1000000)
        \#Kd, n, d2, k2, k3 = popt
        #print('Kd=',Kd,'n=',n,'d2=',d2,'k2=',k2,'k3=',k3)
        \#d3, k4, d4, k5, k6 = popt
        #print('d3=',d3,'k4=',k4,'d4=',d4,'k5=',k5,'k6=',k6)
        d2,k2,k3 = popt
```

print('d2=',d2,'k2=',k2,'k3=',k3)

```
C:\Users\Leandra\anaconda3\Lib\site-packages\scipy\integrate\_odepack_py.py:248: ODE
intWarning: Excess work done on this call (perhaps wrong Dfun type). Run with full_o
utput = 1 to get quantitative information.
   warnings.warn(warning_msg, ODEintWarning)
d2= 343.5277920442328 k2= 278.1720832632907 k3= 3099.885972228157
```

```
In [8]: import sys
        import numpy
        \#params = [1,1,1,1,1,1,1]
         params = [1,1,1]
         numpy.set printoptions(threshold=10)
         \#model1 = np.asarray(func(t,Kd,n,d2,k2,k3))
        model1 = np.asarray(func(t,d2,k2,k3))
         print(len(model1))
         #print(model1)
        \#a,b,c,d,e,f,g = params
         a,b,c = params
        ydata = np.asarray(new)
         print(len(ydata))
        ssr = np.sum((ydata-model1)**2)
        #ssr2 = np.sum((ydata-model2)**2)
        sst = np.sum((ydata - np.mean(ydata))**2)
        R2 = 1 - ssr/sst
        \#R2\ 2 = 1 - ssr2/sst
        print('R2 is: ', R2)
        #print(R2_2)
       102
       102
       R2 is: -6.434556036507434e+17
In [9]: pp = PdfPages('multipage.pdf')
        ydata = np.asarray(new)
         \#condition = [1,2,3,4,5,6,7,8,9]
         for i in range(2):
             \#model = tester(t, Kd, n, d2, k2, k3, i)
            model = tester(t,d2,k2,k3,i)
            #print(model)
            \#a,b,c,d,e,f,g= params
            a,b,c= params
            plt.plot(t,model,'.', label = 'model')
            #print(model)
            \#t = np.linspace(0,34800, num=6961)
```


plt.legend()
pp.savefig()
plt.show()

#raw = rawdata[0:13920:240]

#print(rawdata[i])

plt.plot(t,raw[i],'.',label = 'data')

```
pp.close
```

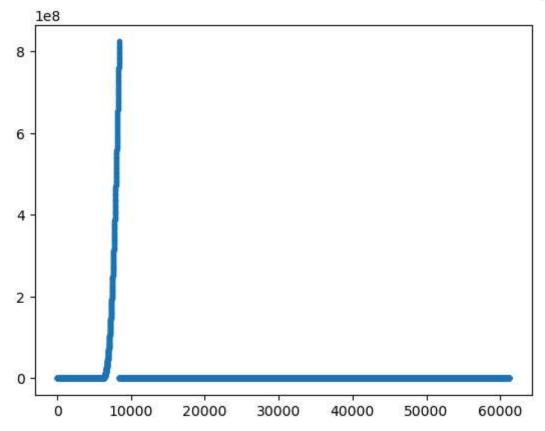

In []: