```
In [1]: import numpy as np
        from scipy.integrate import odeint
        from scipy.optimize import curve_fit
        from scipy.optimize import differential evolution
        %matplotlib inline
        import matplotlib.pyplot as plt
        from matplotlib.backends.backend_pdf import PdfPages
        import pandas as pd
In [2]: from endpoint_maker import sqres
        from endpoint maker import func
        from endpoint maker import t
        from endpoint maker import new
        from endpoint maker import lightdata
        from endpoint maker import rawdata
In [3]: if name == ' main ':
            def initparams():
                 \#bounds = ([0.00001,10000],[0,4],[0.00001,1000],[0.00001,1000],[0.00001,100
                 bounds = ([0.001, 10], [0.001, 10], [0.001, 10], [0.001, 10])
                 result = differential evolution(sqres,bounds,maxiter=500,popsize=20,polish=
                 return result
In [4]: initialp = initparams()
        print(initialp)
        message: Optimization terminated successfully.
        success: True
            fun: 7.859977768995417
              x: [ 1.000e+01 1.000e-03 1.000e-03 1.608e+00]
            nit: 96
           nfev: 7760
In [5]: #def tester(t,Kd,n,d2,k2,k3,i):
        def tester(t,d2,k2,k3,k7,i):
            inivalues = [1,0,0,0,0,0,0]
            arrayvalues = np.asarray([])
            #for i in range(len(lightdata[:,0])):
            def I(t):
                tindex = t/5
                 if tindex > 12241:
                    tindex = 12240
                 return lightdata[int(tindex)]
            \#def\ odes(z,t,Kd,n,d2,k2,k3):
            def odes(z,t,d2,k2,k3,k7):
                 Pu, Pb, Pa, mRNA, mCherry1, mCherry2, mCherry3 = z
                 d1 = 0.019905
                k1 = 0.08299
                 Kd = 90.41
                 n = 0.964487
                 #d2= 486.67
```

```
\#k2 = 6.597
    #k3= 0.0539
    d3 = 0.000077
    k4 = 1.25
    d4 = 0.000031
    k5 = 0.00283
    k6 = 0.00283
    Pu = z[0]
    Pb = z[1]
    Pa = z[2]
    mRNA = z[3]
    mCherry1 = z[4]
    mCherry2 = z[5]
    mCherry3 = z[6]
    dPudt = d1*Pb - k1*I(t)**n/(Kd**n+I(t)**n)*Pu
    dPbdt = k1*I(t)**n/(Kd**n+I(t)**n)*Pu - k2*Pb - d1*Pb + d2*Pa
    dPadt = k2*Pb - d2*Pa
    dmRNAdt = k3*Pa - d3*mRNA
    dmCherry1dt = k4*mRNA-(d4 + k5)*mCherry1
    dmCherry2dt = k5*mCherry1-(d4+k6)*mCherry2
    dmCherry3dt = k6*mCherry2 - d4*mCherry3
    return [dPudt,dPbdt,dPadt,dmRNAdt,dmCherry1dt,dmCherry2dt,dmCherry3dt]
\#solver = odeint(odes,inivalues,t,args = (Kd,n,d2,k2,k3),hmax=0.1)
solver = odeint(odes,inivalues,t,args = (d2,k2,k3,k7),hmax=0.1)
mCherryout = solver[:,6]
#mCherryout = mCherryout[0:24480:240]
return mCherryout
```

```
In [6]: print(initialp.x)
```

[9.99951371e+00 1.00018980e-03 1.00012955e-03 1.60805750e+00]

utput = 1 to get quantitative information.


```
warnings.warn(warning msg, ODEintWarning)
       C:\Users\Leandra\endpoint-fitter\endpoint_maker.py:59: RuntimeWarning: overflow enco
       untered in scalar multiply
         dPbdt = k1*I(t)**n/(Kd**n+I(t)**n)*Pu - k2*Pb - d1*Pb + d2*Pa
       C:\Users\Leandra\endpoint-fitter\endpoint maker.py:60: RuntimeWarning: overflow enco
       untered in scalar multiply
         dPadt = k2*Pb - d2*Pa
       C:\Users\Leandra\endpoint-fitter\endpoint_maker.py:59: RuntimeWarning: invalid value
       encountered in scalar add
         dPbdt = k1*I(t)**n/(Kd**n+I(t)**n)*Pu - k2*Pb - d1*Pb + d2*Pa
       C:\Users\Leandra\endpoint-fitter\endpoint maker.py:60: RuntimeWarning: invalid value
       encountered in scalar subtract
         dPadt = k2*Pb - d2*Pa
       C:\Users\Leandra\anaconda3\Lib\site-packages\scipy\integrate\_odepack_py.py:248: ODE
       intWarning: Illegal input detected (internal error). Run with full_output = 1 to get
       quantitative information.
         warnings.warn(warning msg, ODEintWarning)
       d2= 19.91537200318321 k2= 0.0006443430637888323 k3= 0.0010058163649102306 k7= 1.6080
       574973460484
       C:\Users\Leandra\anaconda3\Lib\site-packages\scipy\optimize\ minpack py.py:1010: Opt
       imizeWarning: Covariance of the parameters could not be estimated
         warnings.warn('Covariance of the parameters could not be estimated',
In [8]: import sys
        import numpy
        \#params = [1,1,1,1,1,1,1]
        params = [1,1,1,1]
        numpy.set printoptions(threshold=10)
        \#model1 = np.asarray(func(t,Kd,n,d2,k2,k3))
        model1 = np.asarray(func(t,d2,k2,k3,k7))
        print(len(model1))
        #print(model1)
        \#a,b,c,d,e,f,q = params
        a,b,c,d= params
        ydata = np.asarray(new)
        print(len(ydata))
        ssr = np.sum((ydata-model1)**2)
        #ssr2 = np.sum((ydata-model2)**2)
        sst = np.sum((ydata-np.mean(ydata))**2)
        R2=1-ssr/sst
        print('R2 is:', R2)
       51
       R2 is: 0.9213730898330829
In [9]: pp = PdfPages('multipage.pdf')
        ydata = np.asarray(new)
        \#condition = [1,2,3,4,5,6,7,8,9]
```

C:\Users\Leandra\anaconda3\Lib\site-packages\scipy\integrate\\_odepack\_py.py:248: ODE intWarning: Excess work done on this call (perhaps wrong Dfun type). Run with full\_o

```
for i in range(1):
    #model = tester(t,Kd,n,d2,k2,k3,i)
    model = tester(t,d2,k2,k3,k7,i)

#print(model)
#a,b,c,d,e,f,g= params
a,b,c,d= params

plt.plot(t,model,'.', label = 'model')
#print(model)
#t = np.Linspace(0,34800, num=6961)
#raw = rawdata[0:13920:240]
plt.plot(t,rawdata,'.',label = 'data')
#print(rawdata[i])
plt.legend()
pp.savefig()
plt.show()
```

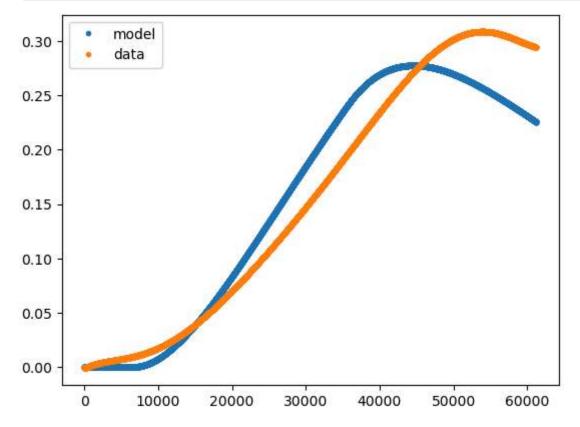

```
In []:
In []:
In [10]: #####
```