

Java Programming, 9e

Chapter 7

Characters, Strings, and the StringBuilder





Objectives

- Identify string data problems
- Use `Character` class methods
- Declare and compare `String` objects
- Use other `String` methods
- Use the `StringBuilder` and `StringBuffer` classes



Understanding String Data Problems (1 of 4)

- Manipulating characters and groups of characters provides some challenges for the beginning Java programmer
- A `String` is a class
 - Each created `String` is a class object
 - The `String` variable name is not a simple data type
 - **Reference**
 - A variable that holds a memory address



Understanding String Data Problems (2 of 4)

- Compare two `Strings` using the `==` operator
 - Not comparing values
 - Comparing computer memory locations
- Compare contents of memory locations more frequently than memory locations themselves



Understanding String Data Problems (3 of 4)

```
import java.util.Scanner;
public class TryToCompareStrings
{
    public static void main(String[] args)
    {
        String aName = "Carmen";
        String anotherName;
        Scanner input = new Scanner(System.in);
        System.out.print("Enter your name > ");
        anotherName = input.nextLine();
        if(aName == anotherName)
            System.out.println(aName + " equals " + anotherName);
        else
            System.out.println(aName + " does not equal " + anotherName);
    }
}
```

Don't Do It
Do not use == to compare Strings' contents.

Figure 7-1 The TryToCompareStrings application



Understanding String Data Problems (4 of 4)

- Classes to use when working with character data
 - **Character**
 - Instances hold a single character value
 - Defines methods that can manipulate or inspect single-character data
 - **String**
 - A class for working with fixed-string data
 - Unchanging data composed of multiple characters
 - **StringBuilder and StringBuffer**
 - Classes for storing and manipulating changeable data composed of multiple characters



Using Character Class Methods (1 of 4)

- Character class
 - Contains standard methods for testing the values of characters
 - Methods that begin with “is”
 - Such as `isUpperCase()`
 - Return a Boolean value that can be used in comparison statements
 - Methods that begin with “to”
 - Such as `toUpperCase()`
 - Return a character that has been converted to the stated format



Using Character Class Methods (2 of 4)

Table 7-1 Commonly used methods of the Character class

Method	Description
isUpperCase ()	Tests if character is uppercase
toUpperCase ()	Returns the uppercase equivalent of the argument; no change is made if the argument is not a lowercase letter
isLowerCase ()	Tests if character is lowercase
toLowerCase ()	Returns the lowercase equivalent of the argument; no change is made if the argument is not an uppercase letter
isDigit()	Returns true if the argument is a digit (0–9) and false otherwise
isLetter()	Returns true if the argument is a letter and false otherwise
isLetterOrDigit()	Returns true if the argument is a letter or digit and false otherwise
isWhitespace ()	Returns true if the argument is whitespace and false otherwise; this includes the space, tab, newline, carriage return, and form feed



Using Character Class Methods (3 of 4)

```
public class CharacterInfo
{
    public static void main(String[] args)
    {
        char aChar = 'C';
        System.out.println("The character is " + aChar);
        if(Character.isUpperCase(aChar))
            System.out.println(aChar + " is uppercase");
        else
            System.out.println(aChar + " is not uppercase");
        if(Character.isLowerCase(aChar))
            System.out.println(aChar + " is lowercase");
        else
            System.out.println(aChar + " is not lowercase");
        aChar = Character.toLowerCase(aChar);
        System.out.println("After toLowerCase(), aChar is " + aChar);
        aChar = Character.toUpperCase(aChar);
        System.out.println("After toUpperCase(), aChar is " + aChar);
    }
}
```

Figure 7-3 The CharacterInfo application (*continues*)



Using Character Class Methods (4 of 4)

(continued)

```
    if(Character.isLetterOrDigit(aChar))
        System.out.println(aChar + " is a letter or digit");
    else
        System.out.println(aChar +
            " is neither a letter nor a digit");
    if(Character.isWhitespace(aChar))
        System.out.println(aChar + " is whitespace");
    else
        System.out.println(aChar + " is not whitespace");
}
```

Figure 7-3 The CharacterInfo application



Declaring and Comparing String Objects (1 of 2)

- Literal string
 - A sequence of characters enclosed within double quotation marks
 - An unnamed object, or **anonymous object**, of the `String` class
- **String variable**
 - A named object of the `String` class
- Class `String`
 - Defined in `java.lang.String`
 - Automatically imported into every program



Declaring and Comparing String Objects (2 of 2)

- Declare a `String` variable
 - The `String` itself is distinct from the variable used to refer to it

- Create a `String` object

```
String aGreeting = new String("Hello");
```

```
String aGreeting = "Hello";
```

- You can create a `String` object without:
 - Using the keyword `new`
 - Explicitly calling the class constructor



Comparing String Values (1 of 6)

- `String` is a class
 - Each created `String` is a class object
- `String` variable name
 - A reference variable
 - Refers to a location in memory
 - Rather than to a particular value
- Assign a new value to a `String`
 - The address held by the `String` is altered



Comparing String Values (2 of 6)

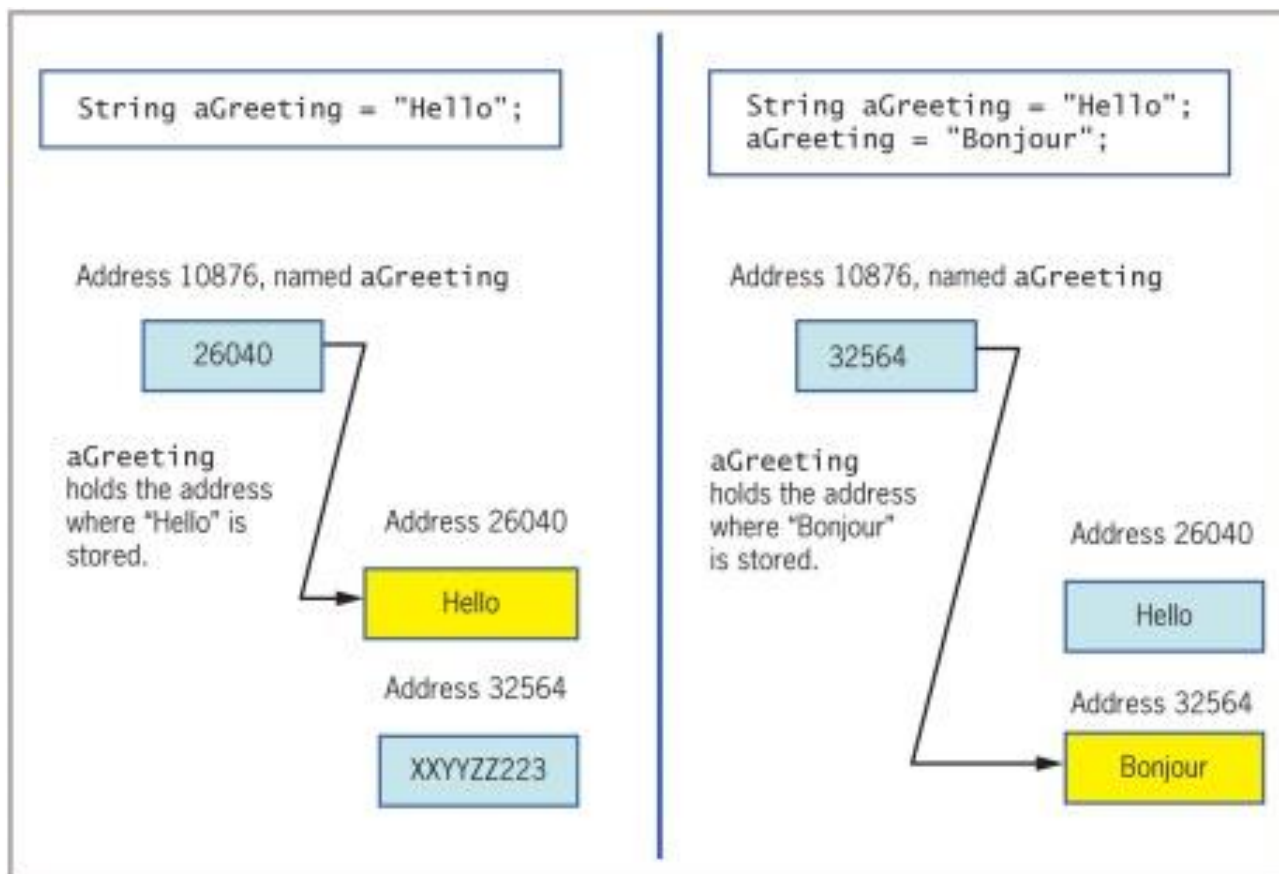


Figure 7-5 Contents of `aGreeting` at declaration and after an assignment



Comparing String Values (3 of 6)

- **Immutable**

- Objects that cannot be changed, such as a `String`
- Making simple comparisons between `Strings` often produces misleading results
- Comparing `Strings` using the `==` operator
 - Compares memory addresses, not values



Comparing String Values (4 of 6)

- **equals () method**

- Evaluates the contents of two `String` objects to determine if they are equivalent
- Returns `true` if objects have identical contents

```
public boolean equals(String s)
```

- **equalsIgnoreCase () method**

- Ignores case when determining if two `Strings` are equivalent
- Useful when users type responses to prompts in programs



Comparing String Values (5 of 6)

```
import java.util.Scanner;
public class CompareStrings
{
    public static void main(String[] args)
    {
        String aName = "Carmen";
        String anotherName;
        Scanner input = new Scanner(System.in);
        System.out.print("Enter your name > ");
        anotherName = input.nextLine();
        if(aName.equals(anotherName))
            System.out.println(aName + " equals " + anotherName);
        else
            System.out.println(aName + " does not equal " + anotherName);
    }
}
```

Using the equals() method

Figure 7-6 The CompareStrings application



Comparing String Values (6 of 6)

- **compareTo () method**

- Compares two `Strings` and returns:

- Zero: If two `Strings` refer to the same value
- Negative number: If the calling object is “less than” the argument
- Positive number: If the calling object is “more than” the argument

```
if (aWord.compareTo(anotherWord) < 0)
```



Empty and null Strings

- Empty Strings
 - Reference a memory address with no characters
 - Can be used in `String` methods
- **null Strings**
 - Use the `null` Java keyword
 - Strings are set to `null` by default
 - Cannot be used in `String` methods



Using a Variety of String Methods (1 of 6)

- **toUpperCase ()** and **toLowerCase ()** methods
 - Convert any `String` to its uppercase or lowercase equivalent
- **length ()** method
 - Returns the length of a `String`
- **indexOf ()** method
 - Determines whether a specific character occurs within a `String`
 - Returns the position of the character
 - The first position of a `String` is zero
 - The return value is `-1` if the character does not exist in the `String`



Using a Variety of String Methods (2 of 6)

- **charAt () method**
 - Requires an integer argument
 - Indicates the position of the character that the method returns
- **endsWith () method** and **startsWith () method**
 - Each takes a `String` argument
 - Return `true` or `false` if a `String` object does or does not end or start with the specified argument, respectively



Using a Variety of String Methods (3 of 6)

- **replace()** method

- Replaces all occurrences of some character within a `String`

- **toString()** method

- Not part of the `String` class
- Converts any object to a `String`
- Converts primitive data types to `Strings`

```
String theString;
```

```
int someInt = 4;
```

```
theString = Integer.toString(someInt);
```



Using a Variety of String Methods (4 of 6)

- **Concatenation**

- Join a simple variable to a `String`

```
String aString = "My age is " + myAge;
```

- Use the `+` operator

- **`substring()` method**

- Extracts part of a `String`
- Takes two integer arguments
 - Start position
 - End position
- The length of the extracted substring is the difference between the second integer and the first integer



Using a Variety of String Methods (5 of 6)

```
import javax.swing.*;
public class Businessletter
{
    public static void main(String[] args)
    {
        String name;
        String firstName = "";
        String familyName = "";
        int x;
        char c;
        name = JOptionPane.showInputDialog(null,
            "Please enter customer's first and last name");
        x = 0;
        while(x < name.length())
        {
            if(name.charAt(x) == ' ')
            {
                firstName = name.substring(0, x);
                familyName = name.substring(x + 1, name.length());
                x = name.length();
            }
            ++x;
        }
        JOptionPane.showMessageDialog(null,
            "Dear " + firstName +
            ",\nI am so glad we are on a first name basis" +
            "\nbecause I would like the opportunity to" +
            "\ntalk to you about an affordable insurance" +
            "\nprotection plan for the entire " + familyName +
            "\nfamily. Call A-One Family Insurance today" +
            "\nat 1-800-555-9287.");
    }
}
```

Figure 7-8 The BusinessLetter application



Using a Variety of String Methods (6 of 6)

- `regionMatches()` method
 - Two variants that can be used to test if two `String` regions are equal
- A substring of the specified `String` object is compared to a substring of the other
 - If the substrings contain the same character sequence, then the expression is `true`
 - Otherwise, the expression is `false`
- A second version uses an additional `boolean` argument
 - Determines whether case is ignored when comparing characters



Converting String Objects to Numbers (1 of 2)

- **Integer class**

- Part of `java.lang`
- Automatically imported into programs
- Converts a `String` to an integer
- **`parseInt()` method**
 - Takes a `String` argument
 - Returns its integer value

- **Wrapper**

- A class or an object “wrapped around” a simpler element



Converting String Objects to Numbers (2 of 2)

- Integer class `valueOf()` method
 - Converts a `String` to an `Integer` class object
- Integer class `intValue()` method
 - Extracts the simple integer from its wrapper class
- **Double class**
 - A wrapper class
 - Imported into programs automatically
 - **`parseDouble()` method**
 - Takes a `String` argument and returns its `double` value



Learning About the StringBuilder and StringBuffer Classes (1 of 10)

- The value of a `String` is fixed
 - After a `String` is created, it is immutable
- `StringBuilder` and `StringBuffer` classes
 - An alternative to the `String` class
 - Used when a `String` will be modified
 - Can use anywhere you would use a `String`
 - Part of the `java.lang` package
 - Automatically imported into every program



Learning About the StringBuilder and StringBuffer Classes (2 of 10)

- `StringBuilder`
 - More efficient
- `StringBuffer`
 - Thread safe
 - Use in multithreaded programs



Learning About the StringBuilder and StringBuffer Classes (3 of 10)

- Create a `StringBuilder` object

```
StringBuilder eventString = new    StringBuilder ("Hello  
there");
```

- Must use:

- The keyword `new`
- The constructor name
- An initializing value between the constructor's parentheses



Learning About the StringBuilder and StringBuffer Classes (4 of 10)

- Buffer
 - A memory block
 - Might or might not contain a `String`
 - The `String` might not occupy the entire buffer
 - The length of a `String` can be different from the length of the buffer
 - Capacity
 - The actual length of the buffer



Learning About the StringBuilder and StringBuffer Classes (5 of 10)

- `setLength()` method
 - Changes the length of a `String` in a `StringBuilder` object
- `length` property
 - An attribute of the `StringBuilder` class
 - Identifies the number of characters in the `String` contained in the `StringBuilder`
- `capacity()` method
 - Finds the capacity of a `StringBuilder` object



Learning About the StringBuilder and StringBuffer Classes (6 of 10)

```
import javax.swing.JOptionPane;
public class StringBuilderDemo
{
    public static void main(String[] args)
    {
        StringBuilder nameString = new StringBuilder("Barbara");
        int nameStringCapacity = nameString.capacity();
        System.out.println("Capacity of nameString is " +
            nameStringCapacity);
        StringBuilder addressString = null;
        addressString = new
            StringBuilder("6311 Hickory Nut Grove Road") ;
    }
}
```

Figure 7-12 The StringBuilderDemo application (*continues*)



Learning About the StringBuilder and StringBuffer Classes (7 of 10)

(continued)

```
int addStringCapacity = addressString.capacity();
System.out.println("Capacity of addressString is " +
    addStringCapacity);
nameString.setLength(20);
System.out.println("The name is " + nameString + "end");
addressString.setLength(20);
System.out.println("The address is " + addressString);
    }
}
```

Figure 7-12 The StringBuilderDemo application



Learning About the StringBuilder and StringBuffer Classes (8 of 10)

- Using `StringBuilder` objects
 - Provides improved computer performance over `String` objects
 - Can insert or append new contents into `StringBuilder`
- `StringBuilder` constructors
 - `public StringBuilder ()`
 - `public StringBuilder (int capacity)`
 - `public StringBuilder (String s)`



Learning About the StringBuilder and StringBuffer Classes (9 of 10)

- **append()** method
 - Adds characters to the end of a `StringBuilder` object
- **insert()** method
 - Adds characters at a specific location within a `StringBuilder` object
- **setCharAt()** method
 - Changes a character at a specified position within a `StringBuilder` object
- **charAt()** method
 - Accepts an argument that is the offset of the character position from the beginning of a `String`
 - Returns the character at that position



Learning About the StringBuilder and StringBuffer Classes (10 of 10)

```
import java.time.*;
public class ConcatenationTimeComparison
{
    public static void main(String[] args)
    {
        long startTime, endTime;
        final int TIMES = 200_000;
        final int FACTOR = 1_000_000;
        int x;
        StringBuilder string1 = new StringBuilder("");
        StringBuilder string2 = new StringBuilder(TIMES * 4);
        LocalDateTime now;
        now = LocalDateTime.now();
        startTime = now.getNano();
        for(x = 0; x < TIMES; ++x)
            string1.append("Java");
        now = LocalDateTime.now();
        endTime = now.getNano();
        System.out.println("Time with empty StringBuilder: " +
            ((endTime - startTime) / FACTOR + " milliseconds"));
        now = LocalDateTime.now();
        startTime = now.getNano();
        for(x = 0; x < TIMES; ++x)
            string2.append("Java");
        now = LocalDateTime.now();
        endTime = now.getNano();
        System.out.println("Time with empty StringBuilder: " +
            ((endTime - startTime) / FACTOR + " milliseconds"));
    }
}
```

Figure 7-14 The ConcatenationTimeComparison application



Don't Do It

- Don't attempt to compare `Strings` using the standard comparison operators
- Don't forget that `startsWith()`, `endsWith()`, and `replace()` are case sensitive
- Don't forget to use the `new` operator and the constructor when declaring initialized `StringBuilder` objects
- Don't use `StringBuilder` or `StringBuffer` if the `String` class will work as well



Summary (1 of 2)

- `String` variables
 - References
- `Character` class
 - Instances can hold a single character value
- Each `String` class object
 - Is immutable
 - `equals()` method
- `toString()` method
 - Converts any object to a `String`



Summary (2 of 2)

- `Integer.parseInt()` method
 - Takes a `String` argument and returns an integer value
- `Double.parseDouble()` method
 - Takes a `String` argument and returns a double value
- `StringBuilder` or `StringBuffer` class
 - Improves performance when a string's contents must change