

# Arbeitsauftrag 2

Felix Bello, Gilles Brunner


November 12, 2015


## 1 Einführung


## 2 LAMP

```
lucy:/home/gilles# screen -S newScreen
```

```
lucy:/home/gilles# apt-get install mariadb-client-10.0 mariadb-server-10.0 apache2  
apache2-doc php5 php5-mysql libapache2-mod-php5
```

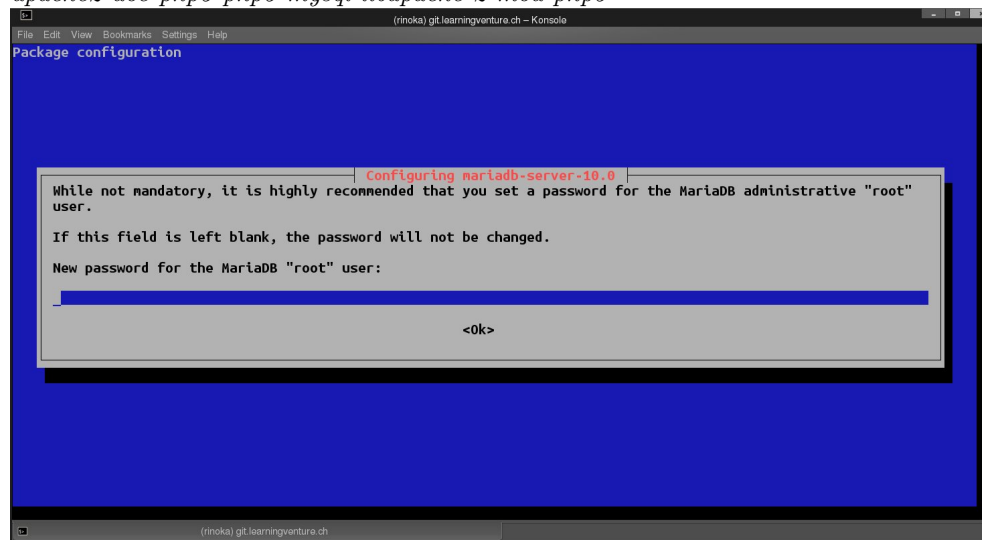

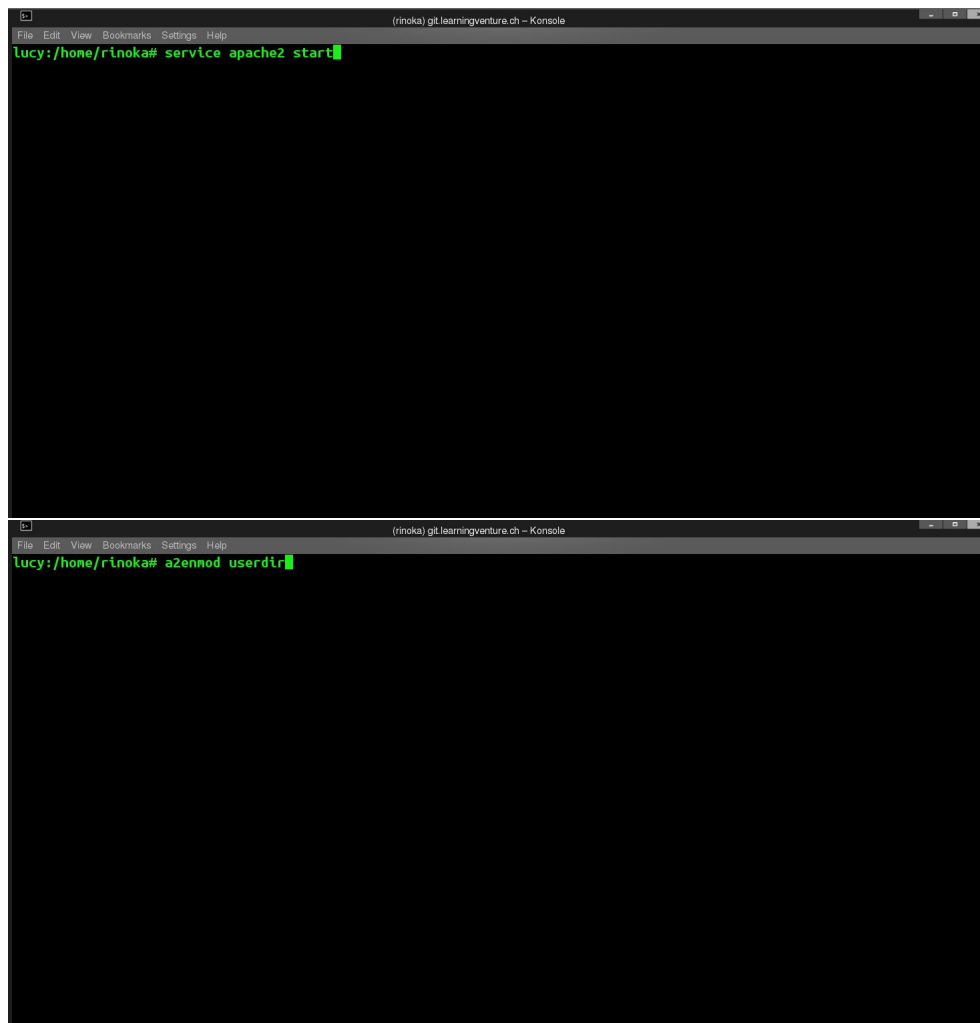

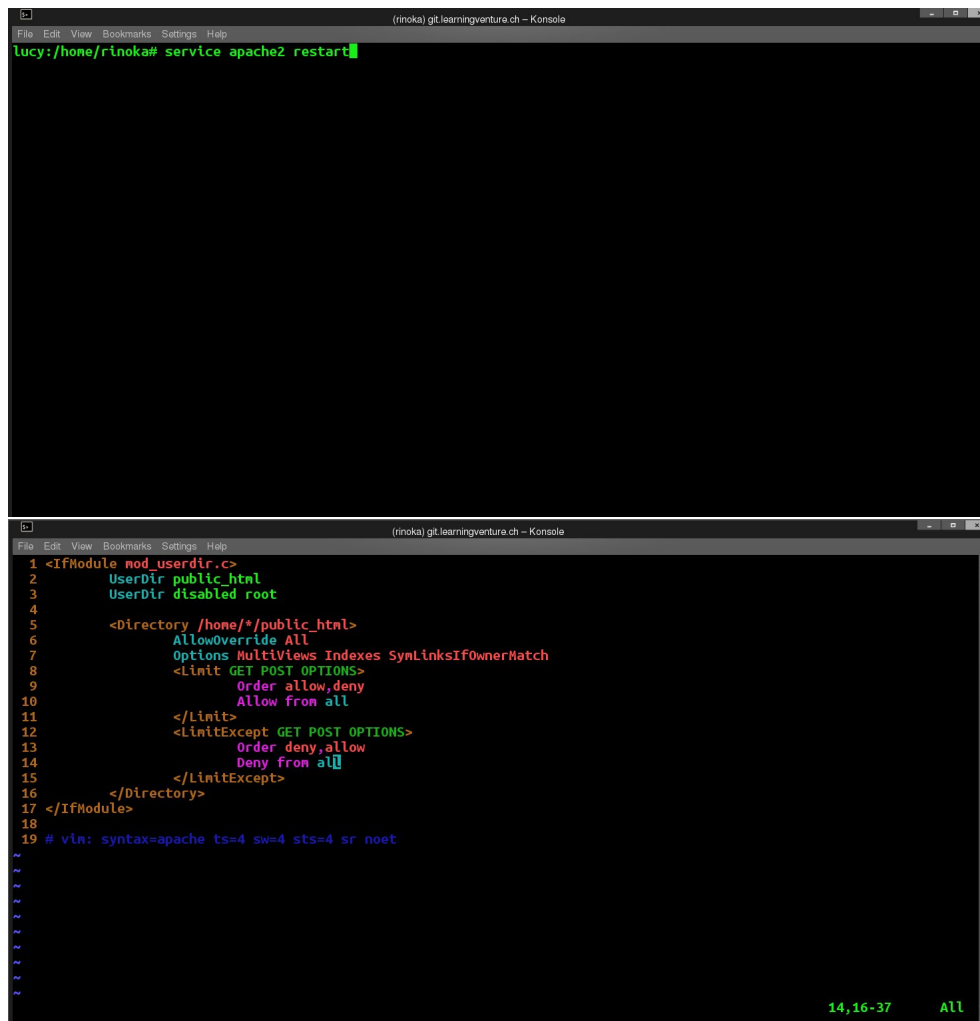

The image shows two screenshots of a terminal window. The top screenshot shows a command being entered: `lucy:/home/rinoka# service apache2 restart`. The bottom screenshot shows the output of the command, which is the configuration for the `mod_userdir.c` module. The output is a list of lines, with line numbers 1 through 19 on the left. The configuration includes `UserDir public_html`, `UserDir disabled root`, and a `<Directory /home/*/public_html>` block with various options and `<Limit>` and `<LimitExcept>` directives. At the bottom right of the terminal window, the text `14,16-37 All` is visible.

```
1 <IfModule mod_userdir.c>
2     UserDir public_html
3     UserDir disabled root
4
5     <Directory /home/*/public_html>
6         AllowOverride All
7         Options MultiViews Indexes SymLinksIfOwnerMatch
8         <Limit GET POST OPTIONS>
9             Order allow,deny
10            Allow from all
11        </Limit>
12        <LimitExcept GET POST OPTIONS>
13            Order deny,allow
14            Deny from all
15        </LimitExcept>
16    </Directory>
17 </IfModule>
18
19 # vim: syntax=apache ts=4 sw=4 sts=4 sr noet
```

14,16-37 All

- 2.1 Linux
- 2.2 Apache
- 2.3 MariaDB
- 2.4 PHP
- 3 WordPress
- 4 OwnCloud