

4 — Component Inputs: \$props

COMPONENT COMMUNICATION

Q. How do you accept inputs from a parent component while maintaining type safety and reactivity?

ANSWER. When building a reusable `<Button>` component, you need a way to pass in text and colors from the parent. You use the `$props` rune to securely accept that data. Destructuring it immediately gives you clean, type-safe variables that stay reactive if the parent changes them.

Parent.svelte

```
<script>
  import Child from './Child.svelte';
</script>


<Child title="Hello Svelte!" />
```

Child.svelte

```
<script>
  let { title } = $props();
</script>

<h1>{title}</h1>
```

DATA FLOW DIAGRAM

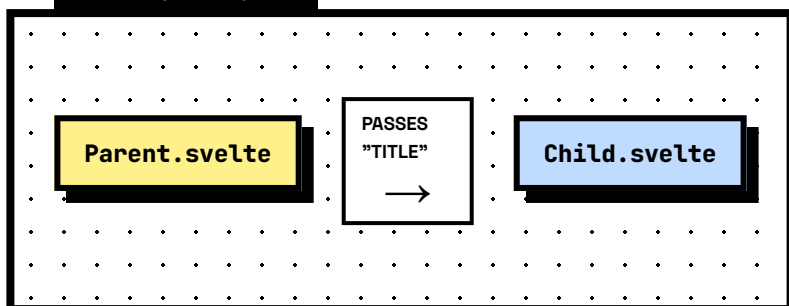

- i Summary.** You now receive data from parent components using the `$props` rune. This is great because destructuring it immediately gives you clean, type-safe inputs. It also totally separates your component's internal state from the outside world.