

14 — Dynamic Components

ARCHITECTURE ROUTING

Q. How do you render a component dynamically based on a variable without using the verbose `svelte:component` tag?


ANSWER. If you are building a dynamic dashboard where a user can choose to view a `<LineChart>` or a `<PieChart>`, you need to swap the UI out on the fly. Instead of writing massive `if/else` blocks, you assign the chosen component to a capitalized variable and render it directly as an HTML tag.

```
<script>
  import Home from './Home.svelte';
  import About from './About.svelte';

  let Tag = $state(Home);
</script>

<!-- Renders whichever component is currently
assigned -->
<Tag />
```

App.svelte

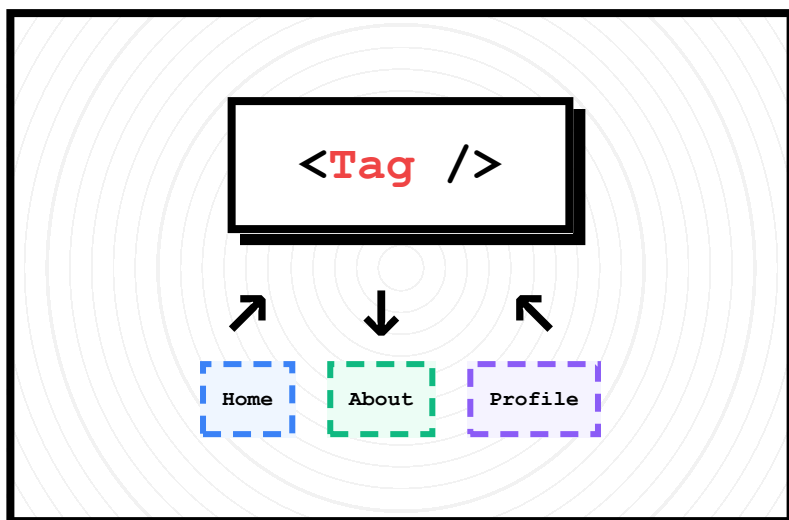

Summary. Svelte 5 removes the verbose

`<svelte:component>` tag entirely. This is fantastic because you can now assign an imported component straight to a **capitalized variable**. You can render it directly, making dynamic routing cleaner and more native-feeling.