

D. Permutation Transformation

time limit per test: 2 seconds

memory limit per test: 256 megabytes

input: standard input


output: standard output

A permutation — is a sequence of length n integers from 1 to n , in which all the numbers occur exactly once. For example, $[1]$, $[3, 5, 2, 1, 4]$, $[1, 3, 2]$ — permutations, and $[2, 3, 2]$, $[4, 3, 1]$, $[0]$ — no.

Polycarp was recently gifted a permutation $a[1 \dots n]$ of length n . Polycarp likes trees more than permutations, so he wants to transform permutation a into a rooted binary tree. He transforms an array of different integers into a tree as follows:


- the maximum element of the array becomes the root of the tree;
- all elements to the left of the maximum — form a left subtree (which is built according to the same rules but applied to the left part of the array), but if there are no elements to the left of the maximum, then the root has no left child;
- all elements to the right of the maximum — form a right subtree (which is built according to the same rules but applied to the right side of the array), but if there are no elements to the right of the maximum, then the root has no right child.

For example, if he builds a tree by permutation $a = [3, 5, 2, 1, 4]$, then the root will be the element $a_2 = 5$, and the left subtree will be the tree that will be built for the subarray $a[1 \dots 1] = [3]$, and the right one — for the subarray $a[3 \dots 5] = [2, 1, 4]$. As a result, the following tree will be built:

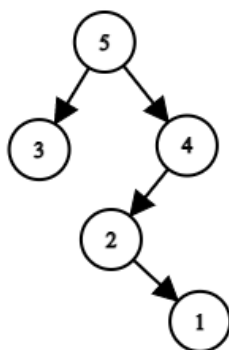

The tree corresponding to the permutation $a = [3, 5, 2, 1, 4]$.

Another example: let the permutation be $a = [1, 3, 2, 7, 5, 6, 4]$. In this case, the tree looks like this:



Codeforces Round #702 (Div. 3)

Contest is running

01:09:02

Contestant



→ Submit?

Language: GNU G++14 6.4.0

Choose file:

The tree corresponding to the permutation $a = [1, 3, 2, 7, 5, 6, 4]$.

Let us denote by d_v the depth of the vertex v , that is, the number of edges on the path from the root to the vertex numbered v . Note that the root depth is zero. Given the permutation a , for each vertex, find the value of d_v .

Input

The first line contains one integer t ($1 \leq t \leq 100$) — the number of test cases. Then t test cases follow.

The first line of each test case contains an integer n ($1 \leq n \leq 100$) — the length of the permutation.

This is followed by n numbers a_1, a_2, \dots, a_n — permutation a .

Output

For each test case, output n values — d_1, d_2, \dots, d_n .

Example

input	Copy
<pre>3 5 3 5 2 1 4 1 1 4 4 3 1 2</pre>	
output	Copy
<pre>1 0 2 3 1 0 0 1 3 2</pre>	

[Codeforces](#) (c) Copyright 2010-2021 Mike Mirzayanov
 The only programming contests Web 2.0 platform
 Server time: Feb/17/2021 00:25:40^{UTC+9} (i2).
 Desktop version, switch to [mobile version](#).
[Privacy Policy](#)

Supported by



ITMO UNIVERSITY