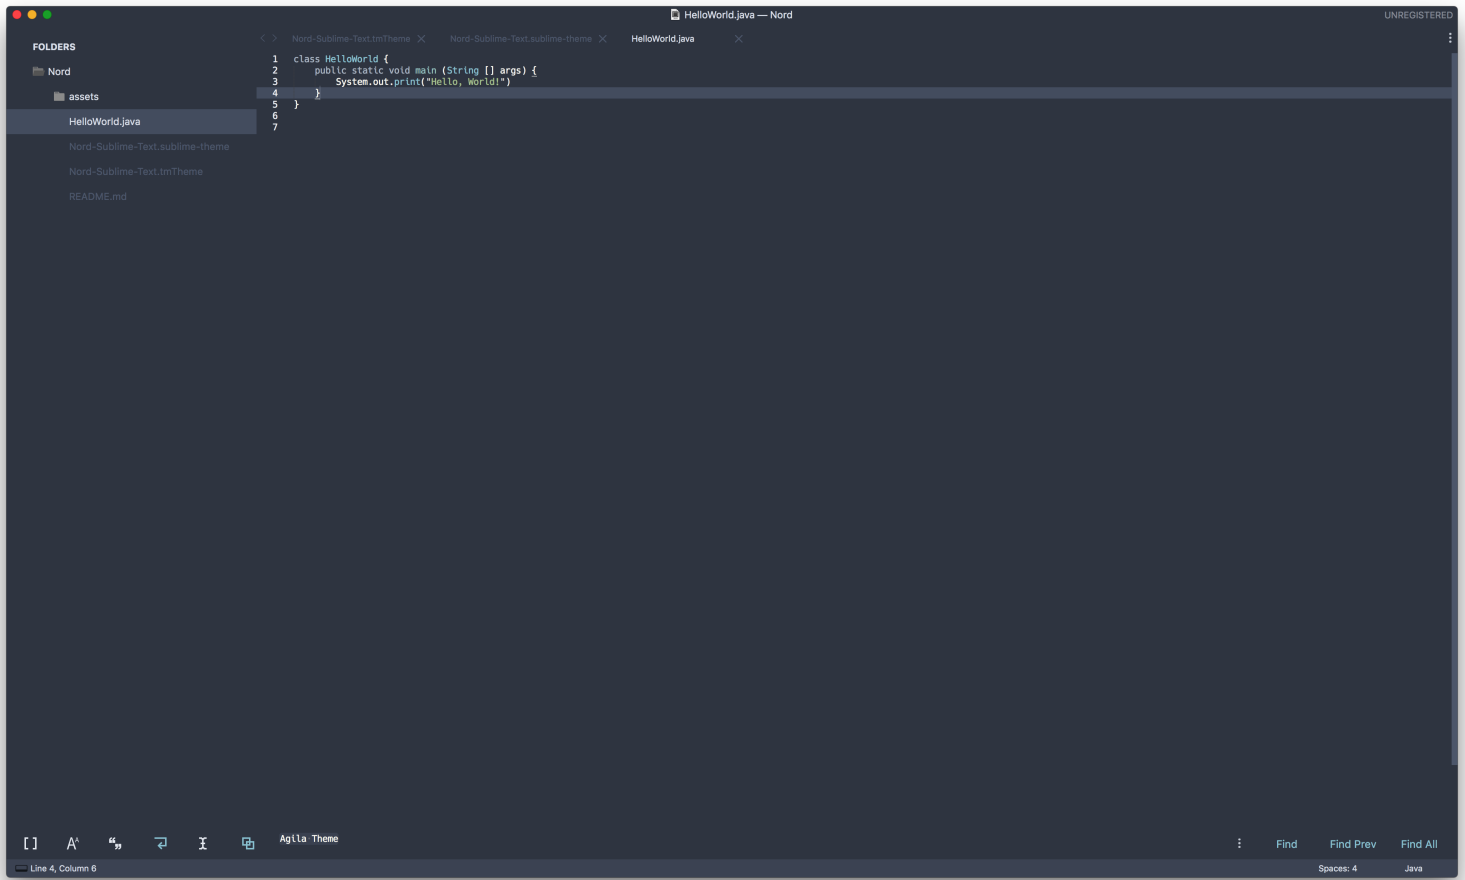# SublimeNord

Unofficial Nord Theme.

Figure 1: Example

Installing

Not a package. Simply save to the sublime packages folder and it *should* work.

Thanks To

- Agila-Theme - .sublime-theme source code and Icons (and the very helpful comments!)
- Boxy - Icons
- fjlaubscher - .tmTheme source code

Suggestions

I'm not a designer nor a UI expert. If there are mistakes or things that I could do to improve the theme, simply add an issue.

Color Settings

[46, 52, 64] –> #2E3440 nord0 Used for texts, backgrounds, carets & structuring characters like curly/square brackets. tab section background | tab element background | tab element active state | sidebar background | sidebar tree | quick panel section | text input field border | bottom panel background |quick panel background | mini quick panel section title_bar | code completion table row | button labels hover | button labels | find buttons | button labels pressed | scrollbar vertical control | scrollbar horizontal control | scroll corner control | empty window | grid layout [59, 66, 82] –> #3B4252 nord1 Used as a lighter background color for UI elements

like status bars. tab element hover state | status bar background | quick panel row hover state | | mini quick panel row hover state | mini quick panel row selected state | code completion table row hover state | code completion table row selected state [67, 76, 94] −> #434C5E nord2 Used as line highlighting in the editor.

In the UI scope it may be used as selection- and hightlight color. selected sidebar row state | minimap control | quick panel row selected state | code completion table row selected state | mini quick panel row selected state [76, 86, 106] −> #4C566A nord3 Used for comments, invisibles, indent- and wrap guide marker.

In the UI scope used as pseudoclass color for disabled elements. tab label inactive state | sidebar entry default state | autocomplete foreground | tab close button | tab inactive dirty button | tab inactive dirty button | scroll left/right button | fold button control default state | scroll drag/pluck | [216, 222, 233] −> #D8DEE9 nord4 Main color for text, variables, constants and attributes. In the UI scope used as semi-light background depending on the theme shading design. tab label active state | status bar text color | sidebar folder default state | sidebar entry selected state | sidebar entry hover state | quick panel foreground | title_bar | quick panel match label | quick panel selected match foreground | quick panel foreground | quick panel path label | quick panel foreground | quick panel path label | autocomplete match label | autocomplete foreground | text dropdown tint tab dropdown tint | [229, 233, 240] −> #E5E9F0 nord5 Used as a lighter background color for UI elements like status bars.

Used as semi-light background depending on the theme shading design. tab label inactive state | bottom icon default state | bottom icon default state | bottom icon default state | bottom icon default state | bottom icon default state | bottom icon default state | fold button control hover state [236, 239, 244] −> #ECEFF4 nord6 Used for punctuations, carets and structuring characters like curly- and square brackets.

In the UI scope used as background, selection- and hightlight color depending on the theme shading design.

[143, 188, 187] −> #8FBCBB nord7 Used for classes, types and documentation tags

[136, 192, 208] −> #88C0D0 nord8 Represents the accent color of the color palette.

Main color for primary UI elements and methods/functions. label default | find buttons hover state | find buttons pressed state | bottom icon hover state | bottom icon selected state | bottom icon hover state | bottom icon selected state | bottom icon hover state | bottom icon selected state | bottom icon hover state | bottom icon selected state | bottom icon hover state | bottom icon selected state | tab close button hover state | tab active dirty button | tab dropdown hover state | scroll tab left/right button hover | text field dropdown hover state [129, 161, 193] −> #81A1C1 nord9 Used for language-specific syntactic/reserved support characters and keywords, operators, tags, units and punctuations like (semi)colons,commas and braces.

[94, 129, 172] −> #5E81AC nord10 Used for markup doctypes, import/include/require statements, pre-processor statements and at-rules (@)

[191, 97, 106] −> #BF616A nord11 Used for errors, git/diff deletion and linter marker.

[208, 135, 112] −> #D08770 nord12 Used for annotations. In the UI scope used for warnings and git/diff renamings.

[235, 203, 139] −> #EBCB8B nord13 Used for escape characters, regular expressions and markup entities.
In the UI scope used for warnings and git/diff renamings.

[163, 190, 140] −> #A3BE8C nord14 Main color for strings and attribute values.
In the UI scope used for git/diff additions and success visualizations.

[180, 142, 173] −> #B48EAD nord15 Used for numbers.