

Performance Report for cbt-26thJul-16k-balancedreads-o01

Table of contents


- Summary of results for cbt-26thJul-16k-balancedreads-o01
- Response Curves
 - Random Read
- Configuration yaml

Summary of results for cbt-26thJul-16k-balancedreads-o01

Workload Name	Maximum Throughput	Latency (ms)
4096_randread	192624 IOps	3.0
8192_randread	184153 IOps	4.2
16384_randread	177080 IOps	3.3

Response Curves

Random Read

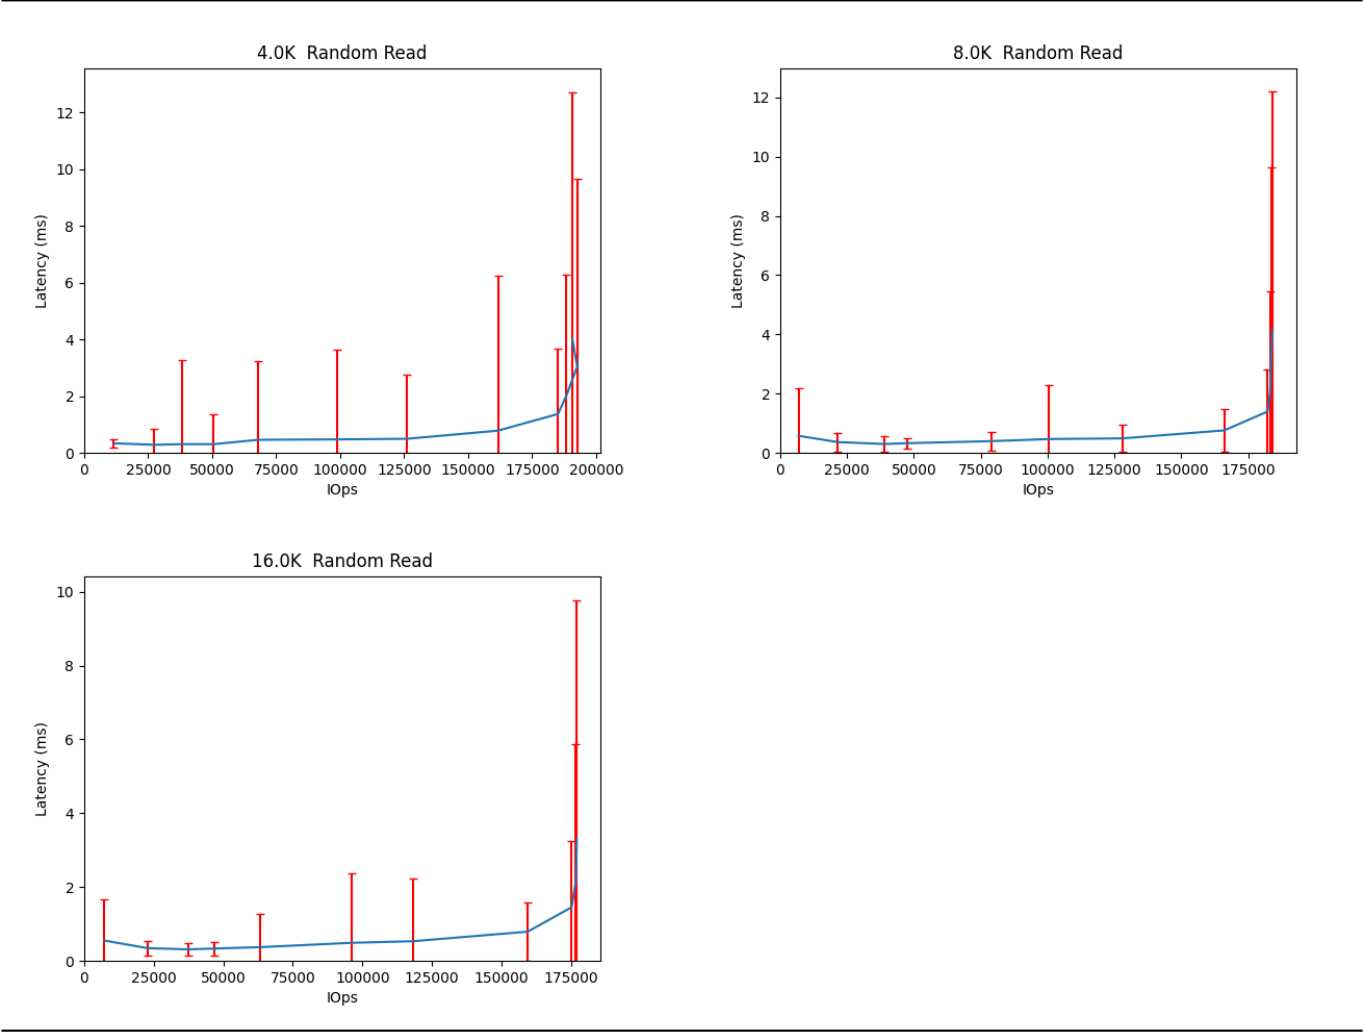

Configuration yaml

```

librbd fio:
  cmd_path: /usr/local/bin/fio2
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 1368750
  volumes_per_client:
    - 16
  workloads:
    16k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 4
        - 8
        - 12
        - 16
        - 24
        - 48
        - 64
        - 128
        - 256
        - 384
        - 588
    32k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 32768
      total_iodepth:
        - 2

```

```

- 4
- 6
- 8
- 12
- 16
- 24
- 32
- 64
- 128
- 256
- 384
4krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 4096
  total_iodepth:
    - 4
    - 8
    - 12
    - 16
    - 32
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
    - 768
8krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 8192
  total_iodepth:
    - 4
    - 8
    - 12
    - 16
    - 32
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
    - 768
precondition:
  jobname: precond1rw
  mode: randwrite
  monitor: false
  numjobs:
    - 1
  op_size: 65536
  time: 600
  total_iodepth:
    - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon

```

```

ceph-osd_cmd: /usr/bin/ceph-osd
ceph-run_cmd: /usr/bin/ceph-run
ceph_cmd: /usr/bin/ceph
clients:
- --- server1 ---
clusterid: ceph
conf_file: /cbt/ceph.conf.4x1x1.fs
fs: xfs
head: --- server1 ---
iterations: 1
mgrs:
  --- server1 ---:
    a: null
mkfs_opts: -f -i size=2048
mons:
  --- server1 ---:
    a: --- IP Address --:6789
mount_opts: -o inode64,noatime,logbsize=256k
osds:
- --- server1 ---
osds_per_node: 8
pdsh_ssh_args: -a -x -l%u %h
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}

```