$\label{lem:comparitive Performance Report for cbt-31stJul-16k-o01-6+2-ecopt 2 vs cbt-5thAug-16k-o01-6+2-balanced$ reads vs cbt-3way-squid-o01 vs cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs cbt-6thAug-32k-o01-6+2-balancedreads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs cbt-6thAug-32k-o01-6+2-balancedreads

Comparitive Performance Report for cbt-31stJul-16k-o01-6+2-ecopt2 vs cbt-5thAug-16k-o01-6+2-balancedreads vs cbt-3way-squid-o01 vs cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs cbt-6thAug-32k-o01-6+2-balancedreads

Table of contents

- $\hbox{--} Comparison summary for cbt-31stJul-16k-001-6+2-ecopt 2 vs cbt-5thAug-16k-001-6+2-balanced reads vs cbt-3way-squid-001 vs cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-001-pdwauto-6+2 vs cbt-6thAug-32k-001-6+2-balanced reads } \\$
- Response Curves
 - Random Read
- Configuration yaml files
 - results
 - results
 - results
 - results

 $\label{lem:comparison} Comparison summary for cbt-31stJul-16k-o01-6+2-ecopt2 \ vs \ cbt-5thAug-16k-o01-6+2-balanced$ $reads \ vs \ cbt-3way-squid-o01 \ vs \ cbt-15thAug-tentacle-3way-reads \ vs \ cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 \ vs \ cbt-6thAug-32k-o01-6+2-balanced$ reads


Comparison summary for cbt-31stJul-16k-o01-6+2-ecopt2 vs cbt-5thAug-16k-o01-6+2-balancedreads vs cbt-3way-squid-o01 vs cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs cbt-6thAug-32k-o01-6+2-balancedreads

Random					
Read	cbt_31stJ cb<u>t 1</u>5th_AMA_table_2	odbiop62v2y%adpuided	<u>:h@btls</u> 15th <i>A</i> argha.hege	tadb e_3thaArzndealdig e	ecbpt&tloAKgpdAkget6016\$
$\overline{4.0\mathrm{K}}$	104960@7 20 4919@2.9 95%	185151@4.1 76%	217162@3.5107%	116479@6.6 11%	213975@3.6104%
8.0K	99102@7.7h $96135@3.9$ $98%$	179076@4.3~81%	209619@3.7112%	104740@7.3 6%	200069@3.8102%
16.0K	90721@4.2h $9033@3.1109%$	167479@3.5~85%	194177@3.0114%	100563@3.8~11%	190201@3.1110%
32.0K	$61724@4.1 \pm 01121@3.8 \ \ 64\%$	134765@1.9118%	160734@2.4160%	63807@4.0 3%	167834@1.5172%

Response Curves Random Read

Response Curves

Random Read

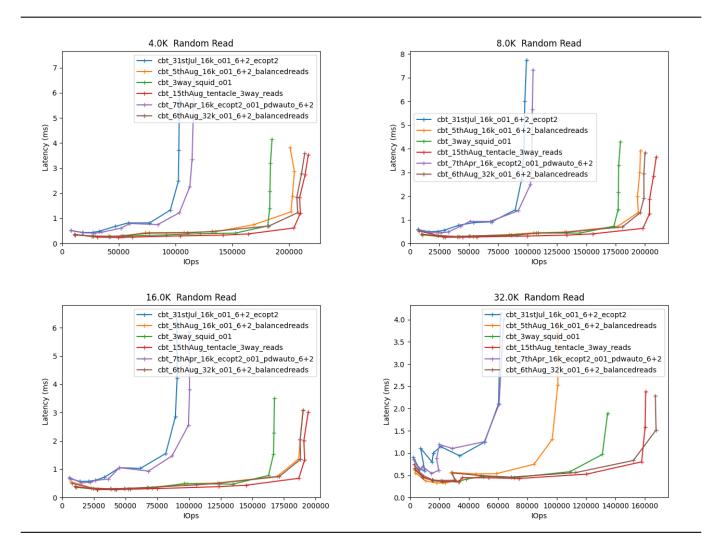

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

```
librbdfio:
  cmd_path: /usr/local/bin/fio
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
 procs_per_volume:
  - 1
  ramp: 30
  rbdname: cbt-librbdfio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 1368750
  volumes_per_client:
  - 16
  workloads:
    16k7030:
      jobname: randmix
      mode: randrw
      numjobs:
      op_size: 16384
      rwmixread: 70
      total_iodepth:
      - 1
      - 2
      - 3
      - 4
      - 8
      - 16
      - 24
      - 32
      - 64
      - 128
      - 256
    16krandomread:
      jobname: randread
      mode: randread
      numjobs:
      - 1
      op_size: 16384
      total_iodepth:
      - 8
      - 12
      - 16
      - 24
      - 48
      - 64
      - 128
      - 256
      - 384
```

```
- 588
16krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 16384
  total_iodepth:
  - 2
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
1Mrandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
 op_size: 1048576
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 12
  - 16
  - 20
  - 24
  - 28
  - 32
1Mrandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 1048576
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 8
  - 16
  - 24
  - 32
  - 48
1Mseqread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 1048576
  total_iodepth:
```

- 1 - 2 - 3 - 6 - 8 - 10 - 12 - 14 - 16 - 20 1Mseqwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 1048576 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 - 160 256krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 262144 total_iodepth: - 2 - 3 - 4 - 5 - 8 - 16 - 24 - 32 - 64 - 128 256krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 262144 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 8 - 16 - 32 - 64

- 96 - 128 - 256 32krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 32768 total_iodepth: - 2 - 4 - 6 - 8 - 12 - 16 - 24 - 32 - 64 - 128 - 256 32krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 32768 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384 - 512 4k7030: jobname: randmix mode: randrw numjobs: - 1 op_size: 4096 rwmixread: 70 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 24 - 32 - 64 - 128 - 256 - 384 4krandomread: jobname: randread mode: randread
- cbt-31stJul-16k-o01-6+2-ecopt2 vs cbt-5thAug-16k-o01-6+ \mathfrak{L} -balancedreads vs cbt-3way-squid-o01 vs August 15, 2025 cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs

```
numjobs:
  op_size: 4096
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
4krandomwrite:
  jobname: randwrite
  mode: randwrite
  numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
512krandomread:
  jobname: randread
  mode: randread
  numjobs:
  - 1
  op_size: 524288
  {\tt total\_iodepth:}
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 24
  - 32
  - 40
  - 48
  - 64
{\tt 512krandomwrite:}\\
  jobname: randwrite
  mode: randwrite
  numjobs:
  - 1
  op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
```

- 5 - 6 - 8 - 16 - 24 - 32 - 48 - 64 512kseqread: jobname: seqread mode: read numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 - 3 - 4 - 6 - 8 - 12 - 16 - 20 - 24 - 32 512kseqwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 - 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 64k3070: jobname: randmix mode: randrw numjobs: - 1 op_size: 65536 rwmixread: 30 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 96 - 128

- 256

```
64k7030:
  jobname: randmix
 mode: randrw
 numjobs:
  - 1
  op_size: 65536
 rwmixread: 70
  total_iodepth:
  - 2
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
  - 96
  - 128
  - 256
64krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
64 krandom write:\\
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 16
  - 24
  - 32
  - 64
  - 128
 - 256
  - 384
64kseqread:
  jobname: read
 mode: read
 numjobs:
  op_size: 65536
  total_iodepth:
  - 2
```

- 4 - 6 - 8 - 16 - 24 - 32 - 64 - 128 - 192 - 256 64kseqwrite: jobname: write mode: write numjobs: - 1 op_size: 65536 total_iodepth: - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 - 512 8krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 8192 total_iodepth: - 4 - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 - 588 - 768 8krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 8192 total_iodepth: - 2 - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384

```
- 512
  - 768
precondition:
 jobname: precond1rw
 mode: randwrite
 monitor: false
 numjobs:
  - 1
 op_size: 65536
  time: 600
  total_iodepth:
  - 16
seq16kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 16384
  {\tt total\_iodepth:}
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
  - 288
seq16kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 16384
  total_iodepth:
  - 4
  - 8
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
  - 1024
seq256kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
```

```
- 8
  - 16
  - 24
  - 32
  - 48
  - 64
seq256kwrite:
  jobname: seqwrite
  mode: write
 numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 4
  - 8
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 256
seq32kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
seq32kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 512
  - 768
seq4kread:
  jobname: seqread
 mode: read
  numjobs:
```

```
- 1
  op_size: 4096
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
  - 288
  - 384
seq4kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
 op_size: 4096
 total_iodepth:
  - 8
  - 16
  - 24
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
  - 1024
  - 1280
  - 1536
seq8kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
 - 96
  - 128
  - 192
  - 288
  - 384
seq8kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
```

```
op_size: 8192
        total iodepth:
        - 2
        - 8
        - 16
        - 24
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 512
        - 768
        - 1024
        - 1280
        - 1536
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
  librbdfio:
    cmd_path: /usr/local/bin/fio
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
   norandommap: true
    osd ra:
    - 4096
    poolname: rbd_replicated
```

```
prefill:
 blocksize: 64k
 numjobs: 1
procs_per_volume:
- 1
ramp: 30
rbdname: cbt-librbdfio
time: 90
time_based: true
use_existing_volumes: true
vol_size: 1368750
volumes_per_client:
- 16
workloads:
  16k7030:
    jobname: randmix
    mode: randrw
    numjobs:
    - 1
    op_size: 16384
    rwmixread: 70
    total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
    - 16
    - 24
    - 32
    - 64
    - 128
    - 256
  16krandomread:
    jobname: randread
    mode: randread
    numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 8
    - 12
    - 16
    - 24
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
  16krandomwrite:
    jobname: randwrite
    mode: randwrite
    numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
```

- 16 - 32 - 64 - 128 - 256 - 384 - 512 ${\tt 1Mrandomread:}$ jobname: randread mode: randread numjobs: - 1 op_size: 1048576 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 12 - 16 - 20 - 24 - 28 - 32 1Mrandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 1048576 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 6 - 8 - 16 - 24 - 32 - 48 1Mseqread: jobname: seqread mode: read numjobs: - 1 op_size: 1048576 total_iodepth: - 1 - 2 - 3 - 4 - 6 - 8 - 10 - 12 - 14 - 16 - 20 1Mseqwrite: jobname: seqwrite

```
mode: write
  numjobs:
  - 1
  op_size: 1048576
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 16
  - 32
  - 48
  - 64
  - 96
  - 128
  - 160
256krandomread:
  jobname: randread
  mode: randread
  numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 2
  - 3
  - 4
  - 5
  - 8
  - 16
  - 24
  - 32
  - 64
  - 128
256krandomwrite:
  jobname: randwrite
  mode: randwrite
  numjobs:
  - 1
  op_size: 262144
  {\tt total\_iodepth:}
  - 1
  - 2
  - 3
  - 5
  - 8
  - 16
  - 32
  - 64
  - 96
  - 128
  - 256
32 krandomread:
  jobname: randread
  mode: randread
  numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 6
```

- 8 - 12 - 16 - 24 - 32 - 64 - 128 - 256 32krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 32768 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384 - 512 4k7030: jobname: randmix mode: randrw numjobs: - 1 op_size: 4096 rwmixread: 70 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 24 - 32 - 64 - 128 - 256 - 384 4krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 4096 total_iodepth: - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256
- cbt-31stJul-16k-o01-6+2-ecopt2 vs cbt-5thAug-16k-o01-6+22-balancedreads vs cbt-3way-squid-o01 vs August 15, 2025 cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs

- 384 - 588 - 768 4krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 4096 total_iodepth: - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384 - 512 - 768 512krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 24 - 32 - 40 - 48 - 64 512krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 3 - 4 - 5 - 6 - 8 - 16 - 24 - 32 - 48 - 64 512kseqread: jobname: seqread mode: read numjobs: - 1
- cbt-31stJul-16k-o01-6+2-ecopt2 vs cbt-5thAug-16k-o01-6+2-balancedreads vs cbt-3way-squid-o01 vs August 15, 2025 cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-o01-pdwauto-6+2 vs

```
op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 6
  - 8
  - 12
  - 16
  - 20
  - 24
  - 32
512kseqwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
 op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 4
  - 6
  - 8
  - 16
  - 32
  - 48
  - 64
  - 96
  - 128
64k3070:
  jobname: randmix
 mode: randrw
 numjobs:
  - 1
  op_size: 65536
 rwmixread: 30
  total_iodepth:
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
  - 96
  - 128
  - 256
64k7030:
  jobname: randmix
 mode: randrw
 numjobs:
  - 1
 op_size: 65536
 rwmixread: 70
 total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
```

- 16 - 32 - 64 - 96 - 128 - 256 64krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 65536 total_iodepth: - 2 - 4 - 6 - 8 - 12 - 16 - 24 - 32 - 64 - 128 - 256 64krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 65536 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 24 - 32 - 64 - 128 - 256 - 384 64kseqread: jobname: read mode: read numjobs: - 1 op_size: 65536 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 24 - 32 - 64 - 128 - 192 - 256 64kseqwrite: jobname: write

mode: write

cbt-31stJul-16k-001-6+2-ecopt2 vs cbt-5thAug-16k-001-6 \pm 2-balancedreads vs cbt-3way-squid-001 vs August 15, 2025 cbt-15thAug-tentacle-3way-reads vs cbt-7thApr-16k-ecopt2-001-pdwauto-6+2 vs

```
numjobs:
  op_size: 65536
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
8krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
 op_size: 8192
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
8krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 2
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
 - 768
precondition:
  jobname: precond1rw
 mode: randwrite
 monitor: false
 numjobs:
  - 1
 op_size: 65536
 time: 600
 total_iodepth:
  - 16
seq16kread:
```

```
jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 16384
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
 - 96
  - 128
  - 192
  - 288
seq16kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
 op_size: 16384
  total_iodepth:
  - 4
  - 8
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
 - 768
  - 1024
seq256kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 8
  - 16
  - 24
 - 32
  - 48
  - 64
seq256kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 262144
  total_iodepth:
```

- 1 - 2 - 8 - 16 - 24 - 32 - 64 - 96 - 128 - 256 seq32kread: jobname: seqread mode: read numjobs: - 1 op_size: 32768 total_iodepth: - 2 - 4 - 8 - 12 - 16 - 24 - 32 - 64 - 96 - 128 - 192 seq32kwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 32768 total_iodepth: - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 512 - 768 seq4kread: jobname: seqread mode: read numjobs: - 1 op_size: 4096 total_iodepth: - 2 - 4 - 8 - 12 - 16 - 24 - 32 - 64 - 96

- 128

- 192 - 288 - 384 seq4kwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 4096 total_iodepth: - 8 - 16 - 24 - 32 - 48 - 64 - 128 - 256 - 384 - 512 - 768 - 1024 - 1280 - 1536 seq8kread: jobname: seqread mode: read numjobs: - 1 op_size: 8192 total_iodepth: - 2 - 4 - 8 - 12 - 16 - 24 - 32 - 64 - 96 - 128 - 192 - 288 - 384 seq8kwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 8192 total_iodepth: - 2 - 8 - 16 - 24 - 32 - 48 - 64 - 128 - 256 - 384

- 512

```
- 768
        - 1024
        - 1280
        - 1536
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```

```
librbdfio:
  cmd_path: /usr/local/bin/fio2
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
 procs_per_volume:
  - 1
  ramp: 30
  rbdname: cbt-librbdfio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 1368750
  volumes_per_client:
  - 16
  workloads:
    16krandomread:
      jobname: randread
      mode: randread
      numjobs:
      op_size: 16384
      total_iodepth:
      - 4
      - 8
      - 12
      - 16
      - 24
      - 48
      - 64
      - 128
      - 256
      - 384
      - 588
    32krandomread:
      jobname: randread
      mode: randread
      numjobs:
      - 1
      op_size: 32768
      total_iodepth:
      - 2
      - 4
      - 6
      - 8
      - 12
      - 16
      - 24
      - 32
      - 64
      - 128
      - 256
```

```
- 384
      4krandomread:
        jobname: randread
        mode: randread
        numjobs:
        - 1
        op_size: 4096
        total_iodepth:
        - 8
        - 12
        - 16
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 588
        - 768
      8krandomread:
        jobname: randread
        mode: randread
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 4
        - 8
        - 12
        - 16
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 588
        - 768
      precondition:
        jobname: precond1rw
        mode: randwrite
        monitor: false
        numjobs:
        - 1
        op_size: 65536
        time: 600
        total_iodepth:
        - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
```

```
mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
  librbdfio:
    cmd_path: /usr/local/bin/fio2
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
    norandommap: true
    osd_ra:
    - 4096
    poolname: rbd_replicated
    prefill:
      blocksize: 64k
      numjobs: 1
    procs_per_volume:
    - 1
    ramp: 30
    rbdname: cbt-librbdfio
    time: 90
    time based: true
    use_existing_volumes: true
    vol_size: 1368750
    volumes_per_client:
    - 16
    workloads:
      16krandomread:
        jobname: randread
        mode: randread
        numjobs:
        - 1
        op_size: 16384
        total_iodepth:
        - 4
        - 8
        - 12
        - 16
        - 24
        - 48
        - 64
        - 128
        - 256
        - 384
```

```
- 588
32krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
  - 384
4krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
8krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
precondition:
  jobname: precond1rw
 mode: randwrite
 monitor: false
  numjobs:
```

```
- 1
        op size: 65536
        time: 600
        total_iodepth:
        - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```

```
librbdfio:
  cmd_path: /usr/local/bin/fio2
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
 procs_per_volume:
  - 1
  ramp: 30
  rbdname: cbt-librbdfio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 608333
  volumes_per_client:
  - 16
  workloads:
    16krandomread:
      jobname: randread
      mode: randread
      numjobs:
      op_size: 16384
      total_iodepth:
      - 4
      - 8
      - 12
      - 16
      - 24
      - 48
      - 64
      - 128
      - 256
      - 384
      - 588
    32krandomread:
      jobname: randread
      mode: randread
      numjobs:
      - 1
      op_size: 32768
      total_iodepth:
      - 2
      - 4
      - 6
      - 8
      - 12
      - 16
      - 24
      - 32
      - 64
      - 128
      - 256
```

```
- 384
4krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
64krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
8krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
precondition:
  jobname: precond1rw
 mode: randwrite
 monitor: false
 numjobs:
  - 1
```

```
op_size: 65536
        time: 600
        total_iodepth:
        - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
  librbdfio:
    cmd path: /usr/local/bin/fio2
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
    norandommap: true
    osd_ra:
    - 4096
    poolname: rbd_replicated
    prefill:
      blocksize: 64k
      numjobs: 1
    procs_per_volume:
    - 1
    ramp: 30
    rbdname: cbt-librbdfio
   time: 90
    time_based: true
    use_existing_volumes: true
    vol_size: 608333
    volumes_per_client:
    - 16
```

```
workloads:
  16krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 8
    - 12
    - 16
    - 24
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
 32krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 32768
    total_iodepth:
    - 2
    - 4
    - 6
    - 8
    - 12
    - 16
    - 24
    - 32
    - 64
    - 128
    - 256
    - 384
 4krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 4096
    total_iodepth:
    - 4
    - 8
    - 12
    - 16
    - 32
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
    - 768
 64krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 65536
```

```
total_iodepth:
        - 6
        - 8
        - 12
        - 16
        - 24
        - 32
        - 64
        - 128
        - 256
      8krandomread:
        jobname: randread
        mode: randread
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 4
        - 8
        - 12
        - 16
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 588
        - 768
      precondition:
        jobname: precond1rw
        mode: randwrite
        monitor: false
        numjobs:
        - 1
        op_size: 65536
        time: 600
        total_iodepth:
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
```

```
osds:
    - --- server1 ---
osds_per_node: 8
pdsh_ssh_args: -a -x -1%u %h
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: ljsanders
monitoring_profiles:
collect1:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```

```
librbdfio:
  cmd_path: /usr/local/bin/fio2
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
 procs_per_volume:
  - 1
  ramp: 30
  rbdname: cbt-librbdfio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 1368750
  volumes_per_client:
  - 16
  workloads:
    16krandomread:
      jobname: randread
      mode: randread
      numjobs:
      op_size: 16384
      total_iodepth:
      - 4
      - 8
      - 12
      - 16
      - 24
      - 48
      - 64
      - 128
      - 256
      - 384
      - 588
    32krandomread:
      jobname: randread
      mode: randread
      numjobs:
      - 1
      op_size: 32768
      total_iodepth:
      - 2
      - 4
      - 6
      - 8
      - 12
      - 16
      - 24
      - 32
      - 64
      - 128
      - 256
```

```
- 384
4krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
64krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
8krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 588
  - 768
precondition:
  jobname: precond1rw
 mode: randwrite
 monitor: false
 numjobs:
  - 1
```

```
op_size: 65536
        time: 600
        total_iodepth:
        - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 8
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: ljsanders
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
  librbdfio:
    cmd path: /usr/local/bin/fio2
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
    norandommap: true
    osd_ra:
    - 4096
    poolname: rbd_replicated
    prefill:
      blocksize: 64k
      numjobs: 1
    procs_per_volume:
    - 1
    ramp: 30
    rbdname: cbt-librbdfio
   time: 90
    time_based: true
    use_existing_volumes: true
    vol_size: 1368750
    volumes_per_client:
    - 16
```

```
workloads:
  16krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 8
    - 12
    - 16
    - 24
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
 32krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 32768
    total_iodepth:
    - 2
    - 4
    - 6
    - 8
    - 12
    - 16
    - 24
    - 32
    - 64
    - 128
    - 256
    - 384
 4krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 4096
    total_iodepth:
    - 4
    - 8
    - 12
    - 16
    - 32
    - 48
    - 64
    - 128
    - 256
    - 384
    - 588
    - 768
 64krandomread:
    jobname: randread
   mode: randread
   numjobs:
    - 1
    op_size: 65536
```

```
total_iodepth:
        - 6
        - 8
        - 12
        - 16
        - 24
        - 32
        - 64
        - 128
        - 256
      8krandomread:
        jobname: randread
        mode: randread
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 4
        - 8
        - 12
        - 16
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 588
        - 768
      precondition:
        jobname: precond1rw
        mode: randwrite
        monitor: false
        numjobs:
        - 1
        op_size: 65536
        time: 600
        total_iodepth:
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
     a: null
  mkfs_opts: -f -i size=2048
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
```

```
osds:
    - --- server1 ---
    osds_per_node: 8
    pdsh_ssh_args: -a -x -1%u %h
    rados_cmd: /usr/bin/rados
    rbd_cmd: /usr/bin/rbd
    tmp_dir: /tmp/cbt
    use_existing: true
    user: ljsanders
monitoring_profiles:
    collect1:
        args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collect1_dir}
```