Comparitive Performance Report for cbt-4thMar-ecoptmain-4k-8vol-cacheon-rbdoff-isalplugin vs cbt-6thMar-ls26-writes-isal

Table of contents

- Comparison summary for cbt-4thMar-ecoptmain-4k-8vol-cacheon-rbdoff-isalplugin vs cbt-6thMar-ls26-writes-isal
- Response Curves
 - Random Write
- Configuration yaml files
 - results
 - results


Comparison summary for cbt-4thMar-ecoptmain-4k-8vol-cacheon-rbdoff-isalplugin vs cbt-6thMar-ls26-writes-isal

Random Write	cbt_4thMar_ecoptmain <u>cb#k_6%thMlacadh26n wrltubs#fickinhulpd</u> utglinoughput			%change latency
4K	4775 IOps@161.2ms	9701 IOps@79.1ms	103%	-51%
8K	4417 IOps@173.6ms	8603 IOps@89.2ms	95%	-49%
16K	$4564 \; \mathrm{IOps@112.1ms}$	$7146~\mathrm{IOps@71.6ms}$	57%	-36%
64K	$213~\mathrm{MB/s@118.3ms}$	43 MB/s@24.4ms	-80%	-79%

Response Curves Random Write

Response Curves

Random Write

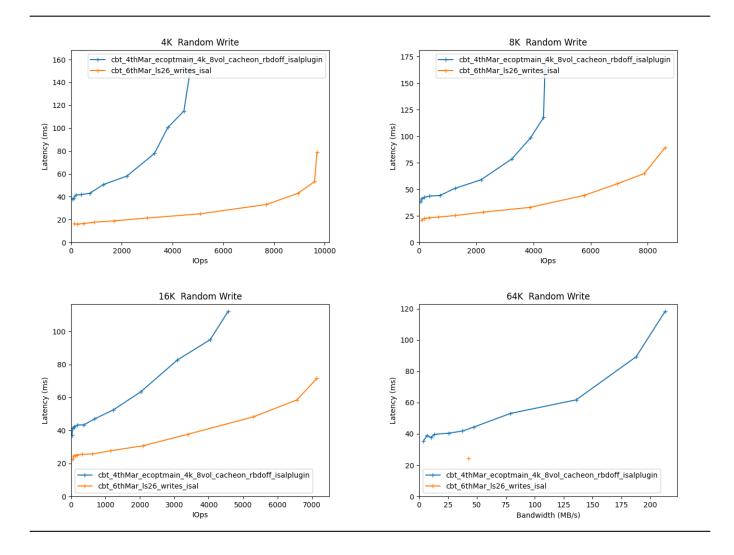

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```
librbdfio:
  cmd_path: /usr/local/bin/fio
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
 norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
  - 1
  ramp: 30
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 52500
  volumes_per_client:
  workloads:
    16k7030:
      jobname: randmix
      mode: randrw
      numjobs:
      - 1
      op_size: 16384
      rwmixread: 70
      total_iodepth:
      - 1
      - 2
      - 3
      - 4
      - 8
      - 16
      - 24
      - 32
      - 64
      - 128
      - 256
    16krandomread:
      jobname: randread
      mode: randread
      numjobs:
      - 1
      op_size: 16384
      total_iodepth:
      - 4
      - 8
      - 12
      - 16
      - 24
      - 48
      - 64
      - 128
      - 256
      - 384
    16krandomwrite:
```

```
jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 16384
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
 - 128
 - 256
  - 384
  - 512
1Mrandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 1048576
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 12
  - 16
  - 20
  - 24
  - 28
  - 32
1Mrandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 1048576
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 8
  - 16
  - 24
 - 32
  - 48
1Mseqread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
 op_size: 1048576
 total_iodepth:
  - 1
  - 2
```

- 3 - 4 - 6 - 8 - 10 - 12 - 14 - 16 - 20 1Mseqwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 1048576 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 - 160 256krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 262144 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 8 - 16 - 24 - 32 - 64 - 128 256krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 262144 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 8 - 16 - 32 - 64 - 96

```
- 256
32krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
 op_size: 32768
  total_iodepth:
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
32krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
4k7030:
  jobname: randmix
 mode: randrw
 numjobs:
  - 1
  op_size: 4096
 rwmixread: 70
  total_iodepth:
  - 1
  - 2
   3
  - 4
  - 8
  - 16
  - 24
 - 32
  - 64
  - 128
  - 256
4krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 4096
```

```
total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
4krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 2
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
512krandomread:
  jobname: randread
  mode: randread
 numjobs:
  - 1
  op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 24
  - 32
  - 40
  - 48
  - 64
512krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
 op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 8
  - 16
```

- 32 - 48 - 64 512kseqread: jobname: seqread mode: read numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 - 3 - 4 - 6 - 8 - 12 - 16 - 20 - 24 - 32 512kseqwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 524288 total_iodepth: - 1 - 2 - 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 64k3070: jobname: randmix mode: randrw numjobs: - 1 op_size: 65536 rwmixread: 30 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 96 - 128 - 256 64k7030: jobname: randmix mode: randrw numjobs:

```
op_size: 65536
  rwmixread: 70
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 32
  - 64
  - 96
  - 128
  - 256
64krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
64krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
 op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
  - 384
64kseqread:
  jobname: read
 mode: read
 numjobs:
  - 1
  op_size: 65536
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 16
  - 24
```

- 32 - 64 - 128 - 192 - 256 64kseqwrite: jobname: write mode: write numjobs: - 1 op_size: 65536 total_iodepth: - 4 - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 - 512 8krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 8192 total_iodepth: - 4 - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 8krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 8192 total_iodepth: - 2 - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384 - 512 - 768 precondition: jobname: precond1rw mode: randwrite monitor: false

numjobs:

```
- 1
  op_size: 65536
 time: 600
 total_iodepth:
  - 16
seq16kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
 op_size: 16384
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
seq16kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 16384
  total_iodepth:
  - 2
 - 4
  - 8
  - 16
  - 32
  - 48
  - 64
  - 128
 - 256
  - 384
  - 512
{\tt seq256kread:}
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 8
  - 16
  - 24
  - 32
  - 48
  - 64
seq256kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
```

```
- 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 4
  - 8
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 256
seq32kread:
  jobname: seqread
  mode: read
  numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
seq32kwrite:
  jobname: seqwrite
  mode: write
  numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 512
  - 768
{\tt seq4kread}:
  jobname: seqread
  mode: read
  numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
```

```
- 64
  - 96
  - 128
  - 192
seq4kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 2
  - 8
  - 16
  - 24
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
 - 768
  - 1024
seq8kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
 op_size: 8192
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
  - 96
  - 128
  - 192
seq8kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 8192
  total_iodepth:
  - 2
  - 8
  - 16
  - 24
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
  - 1024
```

```
cluster:
  archive dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
  librbdfio:
    cmd_path: /usr/local/bin/fio
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
   norandommap: true
    osd_ra:
    - 4096
    poolname: rbd_replicated
    prefill:
      blocksize: 64k
      numjobs: 1
    procs_per_volume:
    - 1
    ramp: 30
    time: 90
    time_based: true
    use_existing_volumes: true
    vol_size: 52500
    volumes_per_client:
    - 8
    workloads:
      16k7030:
        jobname: randmix
        mode: randrw
        numjobs:
```

```
- 1
 op_size: 16384
 rwmixread: 70
 total_iodepth:
  - 1
  - 2
  - 3
 - 4
 - 8
 - 16
 - 24
 - 32
 - 64
 - 128
 - 256
16krandomread:
 jobname: randread
 mode: randread
 numjobs:
 - 1
 op_size: 16384
 total_iodepth:
 - 4
 - 8
 - 12
 - 16
 - 24
 - 48
 - 64
 - 128
 - 256
 - 384
16krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
 - 1
 op_size: 16384
 total_iodepth:
  - 1
  - 2
  - 3
  - 4
 - 8
 - 16
 - 32
 - 64
 - 128
 - 256
 - 384
 - 512
1Mrandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
 op_size: 1048576
 total_iodepth:
  - 1
 - 2
 - 3
 - 4
 - 8
```

- 12 - 16 - 20 - 24 - 28 - 32 1Mrandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 1048576 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 6 - 8 - 16 - 24 - 32 - 48 1Mseqread: jobname: seqread mode: read numjobs: - 1 op_size: 1048576 total_iodepth: - 1 - 2 - 3 - 4 - 6 - 8 - 10 - 12 - 14 - 16 - 20 1Mseqwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 1048576 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 - 160 256krandomread: jobname: randread

mode: randread

```
numjobs:
  - 1
  op_size: 262144
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 8
  - 16
  - 24
  - 32
  - 64
  - 128
256krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
 op_size: 262144
 total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 8
  - 16
  - 32
  - 64
  - 96
  - 128
  - 256
32krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
 op_size: 32768
  total_iodepth:
  - 2
  - 4
  - 6
  - 8
  - 12
  - 16
  - 24
  - 32
 - 64
  - 128
  - 256
32krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
 op_size: 32768
 total_iodepth:
  - 1
  - 2
  - 3
  - 4
```

```
- 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
4k7030:
  jobname: randmix
 mode: randrw
 numjobs:
  - 1
  op_size: 4096
 rwmixread: 70
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 24
  - 32
  - 64
  - 128
  - 256
4krandomread:
  jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 4
  - 8
  - 12
  - 16
  - 32
  - 48
  - 64
  - 128
  - 256
  - 384
4krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 2
  - 4
  - 8
  - 16
  - 32
  - 64
  - 128
  - 256
  - 384
  - 512
  - 768
```

512krandomread:

cbt-4th Mar-ecopt
main-4k-8vol-cacheon-rbdoff-isalplugin \mathfrak{A} lcbt-6th Mar-ls
26-writes-isal

```
jobname: randread
 mode: randread
 numjobs:
  - 1
  op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 8
  - 16
  - 24
  - 32
 - 40
  - 48
  - 64
512krandomwrite:
  jobname: randwrite
 mode: randwrite
 numjobs:
  - 1
 op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 5
  - 6
  - 8
  - 16
  - 24
  - 32
  - 48
  - 64
512kseqread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
 op_size: 524288
  total_iodepth:
  - 1
  - 2
  - 3
  - 4
  - 6
  - 8
  - 12
  - 16
  - 20
 - 24
  - 32
512kseqwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
 op_size: 524288
 total_iodepth:
  - 1
  - 2
```

- 4 - 6 - 8 - 16 - 32 - 48 - 64 - 96 - 128 64k3070: jobname: randmix mode: randrw numjobs: - 1 op_size: 65536 rwmixread: 30 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 96 - 128 - 256 64k7030: jobname: randmix mode: randrw numjobs: - 1 op_size: 65536 rwmixread: 70 total_iodepth: - 1 - 2 - 3 - 4 - 8 - 16 - 32 - 64 - 96 - 128 - 256 64krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 65536 total_iodepth: - 2 - 4 - 6 - 8 - 12 - 16 - 24 - 32

- 128 - 256 64krandomwrite: jobname: randwrite mode: randwrite numjobs: - 1 op_size: 65536 total_iodepth: - 4 - 6 - 8 - 16 - 24 - 32 - 64 - 128 - 256 - 384 64kseqread: jobname: read mode: read numjobs: - 1 op_size: 65536 total_iodepth: - 2 - 4 - 6 - 8 - 16 - 24 - 32 - 64 - 128 - 192 - 256 64kseqwrite: jobname: write mode: write numjobs: - 1 op_size: 65536 total_iodepth: - 4 - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 - 512 8krandomread: jobname: randread mode: randread numjobs: - 1 op_size: 8192 total_iodepth:

- 4 - 8 - 12 - 16 - 32 - 48 - 64 - 128 - 256 - 384 ${\tt 8krandomwrite:}$ jobname: randwrite mode: randwrite numjobs: - 1 op_size: 8192 total_iodepth: - 2 - 4 - 8 - 16 - 32 - 64 - 128 - 256 - 384 - 512 - 768 precondition: jobname: precond1rw mode: randwrite monitor: false numjobs: - 1 op_size: 65536 time: 600 total_iodepth: - 16 seq16kread: jobname: seqread mode: read numjobs: - 1 op_size: 16384 total_iodepth: - 2 - 4 - 8 - 12 - 16 - 24 - 32 - 64 - 96 - 128 - 192 seq16kwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 16384 total_iodepth:

- 2 - 4 - 8 - 16 - 32 - 48 - 64 - 128 - 256 - 384 - 512 seq256kread: jobname: seqread mode: read numjobs: - 1 op_size: 262144 total_iodepth: - 1 - 2 - 3 - 4 - 5 - 8 - 16 - 24 - 32 - 48 - 64 seq256kwrite: jobname: seqwrite mode: write numjobs: - 1 op_size: 262144 total_iodepth: - 1 - 2 - 4 - 8 - 16 - 24 - 32 - 64 - 96 - 128 - 256 seq32kread: jobname: seqread mode: read numjobs: - 1 op_size: 32768 total_iodepth: - 2 - 4 - 8 - 12 - 16 - 24 - 32 - 64

```
- 128
  - 192
seq32kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
  op_size: 32768
  total_iodepth:
  - 4
  - 8
  - 16
  - 32
 - 64
  - 128
  - 256
  - 512
  - 768
seq4kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 4096
  total_iodepth:
  - 2
  - 4
  - 8
  - 12
  - 16
  - 24
  - 32
  - 64
 - 96
  - 128
  - 192
seq4kwrite:
  jobname: seqwrite
 mode: write
 numjobs:
  - 1
 op_size: 4096
  total_iodepth:
  - 2
  - 8
  - 16
  - 24
  - 32
  - 48
 - 64
  - 128
 - 256
 - 384
  - 512
  - 768
  - 1024
seq8kread:
  jobname: seqread
 mode: read
 numjobs:
  - 1
  op_size: 8192
```

```
total_iodepth:
        - 8
        - 12
        - 16
        - 24
        - 32
        - 64
        - 96
        - 128
        - 192
      seq8kwrite:
        jobname: seqwrite
        mode: write
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 2
        - 8
        - 16
        - 24
        - 32
        - 48
        - 64
        - 128
        - 256
        - 384
        - 512
        - 768
        - 1024
        - 1280
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
     a: --- IP Address --:6789
  mount_opts: -o inode64, noatime, logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -1%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
```

```
user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```

results

```
librbdfio:
  cmd_path: /usr/local/bin/fio
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
 norandommap: true
  osd_ra:
  - 4096
 poolname: rbd_replicated
 prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
  - 1
  ramp: 30
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 52500
  volumes_per_client:
  workloads:
    16krandomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
      - 1
      op_size: 16384
      total_iodepth:
      - 1
      - 2
      - 3
      - 4
      - 8
      - 16
      - 32
      - 64
      - 128
      - 256
      - 384
      - 512
    4krandomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
      - 1
      op_size: 4096
      total_iodepth:
      - 2
      - 4
      - 8
      - 16
      - 32
      - 64
      - 128
      - 256
      - 384
      - 512
      - 768
```

```
8krandomwrite:
        jobname: randwrite
        mode: randwrite
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 2
        - 4
        - 8
        - 16
        - 32
        - 64
        - 128
        - 256
        - 384
        - 512
        - 768
      precondition:
        jobname: precond1rw
        mode: randwrite
        monitor: false
        numjobs:
        - 1
        op_size: 65536
        time: 600
        total_iodepth:
        - 16
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```

```
librbdfio:
  cmd path: /usr/local/bin/fio
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
  - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
  - 1
  ramp: 30
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 52500
  volumes_per_client:
  - 8
  workloads:
    16krandomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
      - 1
      op_size: 16384
      total_iodepth:
      - 1
      - 2
      - 3
      - 4
      - 8
      - 16
      - 32
      - 64
      - 128
      - 256
      - 384
      - 512
    4krandomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
      - 1
      op_size: 4096
      total_iodepth:
      - 2
      - 4
      - 8
      - 16
      - 32
      - 64
      - 128
      - 256
      - 384
      - 512
      - 768
    8krandomwrite:
      jobname: randwrite
```

```
mode: randwrite
        numjobs:
        - 1
        op_size: 8192
        total_iodepth:
        - 2
        - 4
        - 8
        - 16
        - 32
        - 64
        - 128
        - 256
        - 384
        - 512
        - 768
      precondition:
        jobname: precond1rw
        mode: randwrite
        monitor: false
        numjobs:
        - 1
        op_size: 65536
        time: 600
        total_iodepth:
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
  - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```