

Comparitive Performance Report for classic-4k-rwtest-disnodeexplorer vs fastec-4k-rwtest-disnodeexplorer

Table of contents

- Comparison summary for classic-4k-rwtest-disnodeexplorer vs fastec-4k-rwtest-disnodeexplorer
- Response Curves
 - Random Read
 - Random Write
- Configuration yaml files
 - results


Comparison summary for classic-4k-rwtest-disnodeexplorer vs fastec-4k-rwtest-disnodeexplorer

Random Read	classic-4k-rwtest-disnodeexplorer	fastec-4k-rwtest-disnodeexplorer	%change throughput	%change latency
16K	30889 IOps@16.6ms	31435 IOps@16.3ms	2%	-2%


Random Write	classic-4k-rwtest-disnodeexplorer	fastec-4k-rwtest-disnodeexplorer	%change throughput	%change latency
16K	8993 IOps@56.9ms	9127 IOps@56.1ms	1%	-1%

Response Curves

Random Read

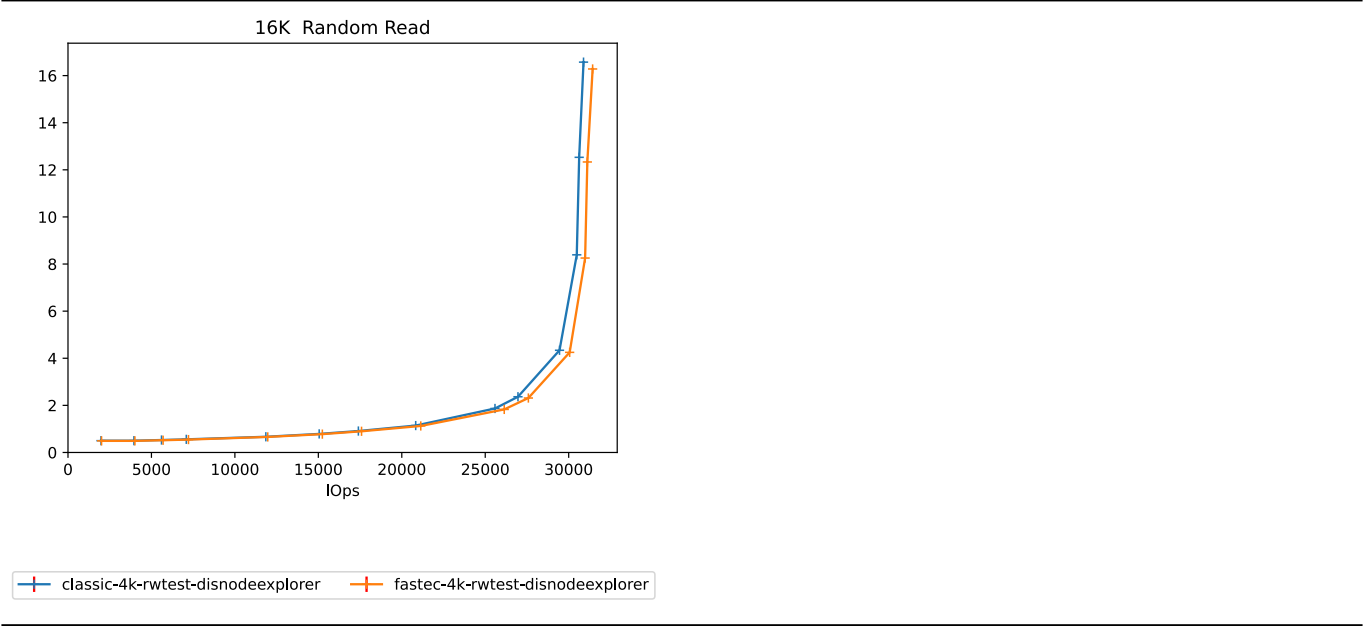

Random Write

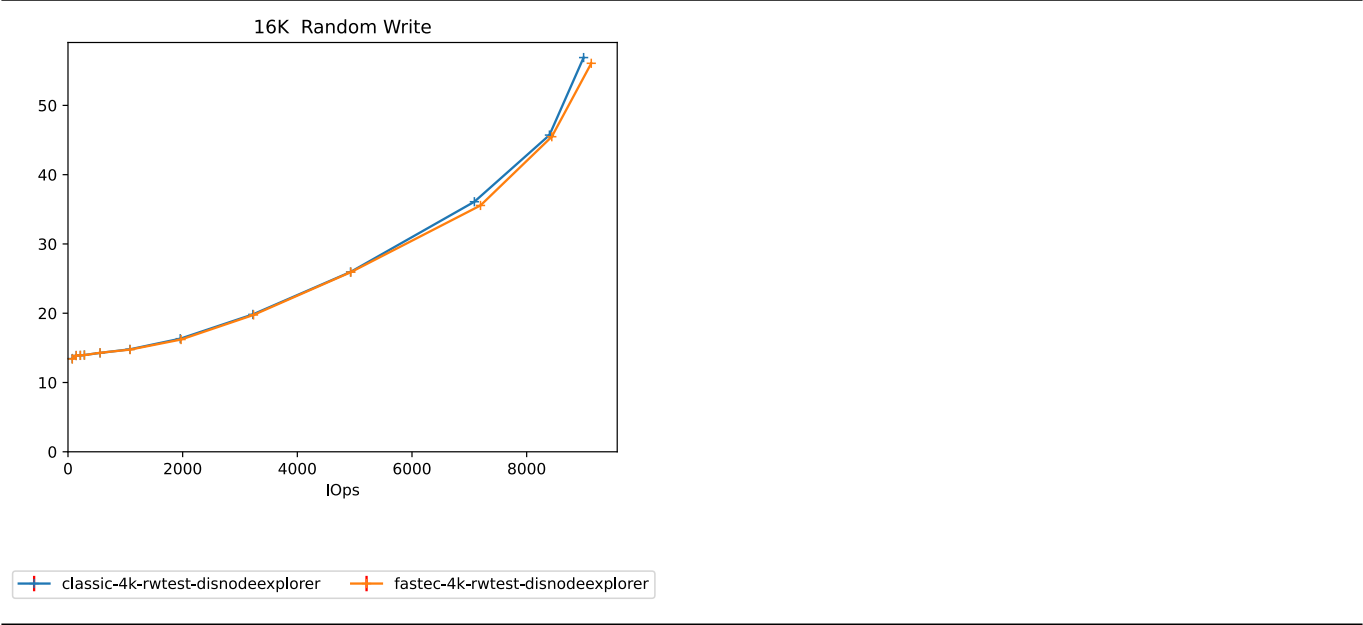

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 55192
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
  workloads:
    16k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 8
        - 12
        - 16
        - 24
        - 48
        - 64
        - 128
        - 256
        - 384
        - 512
    16k randomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 8
        - 16

```

```

    - 32
    - 64
    - 128
    - 256
    - 384
    - 512
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
    - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
    - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
  monitoring_profiles:
    collectl:
      args: -c 18 -sCD -i 10 -P -oz -FO --rawtoo --sep ";" -f {collectl_dir}

```