

Comparitive Performance Report for 3way-reads-osds-6-shardsize-131072 vs 3way-reads-osds-6-shardsize-196608 vs 3way-reads-osds-6-shardsize-262144 vs 3way-reads-osds-6-shardsize-393216 vs 3way-reads-osds-6-shardsize-524288

Table of contents


- Comparison summary for 3way-reads-osds-6-shardsize-131072 vs 3way-reads-osds-6-shardsize-196608 vs 3way-reads-osds-6-shardsize-262144 vs 3way-reads-osds-6-shardsize-393216 vs 3way-reads-osds-6-shardsize-524288
- Response Curves
 - Random Read
- Configuration yaml files
 - results


Comparison summary for
3way-reads-osds-6-shardsize-131072 vs
3way-reads-osds-6-shardsize-196608 vs
3way-reads-osds-6-shardsize-262144 vs
3way-reads-osds-6-shardsize-393216 vs
3way-reads-osds-6-shardsize-524288

Random									
Read	3way_reads	3way_reads	change	3way_reads	change	3way_reads	change	3way_reads	change
	6 shards	6 shards		6 shards		6 shards		6 shards	
512K	2080@8.1ms	1988@9.5	-4%	1965@8.0	-6%	1950@8.6	-6%	1951@8.6	-6%
640K	2070@5.1ms	2112@4.3	2%	1977@7.9	-4%	1958@10.7	-5%	1959@10.7	-5%
768K	2118@4.4ms	2101@4.5	-1%	2099@4.5	-1%	1962@14.4	-7%	1971@9.6	-7%
1024K	2137@5.9ms	2134@5.9	-0%	2114@5.9	-1%	1984@13.2	-7%	1967@9.6	-8%
1280K	2137@2.4ms	2111@3.1	-1%	2110@3.1	-1%	2177@4.8	2%	1991@8.5	-7%

Response Curves

Random Read

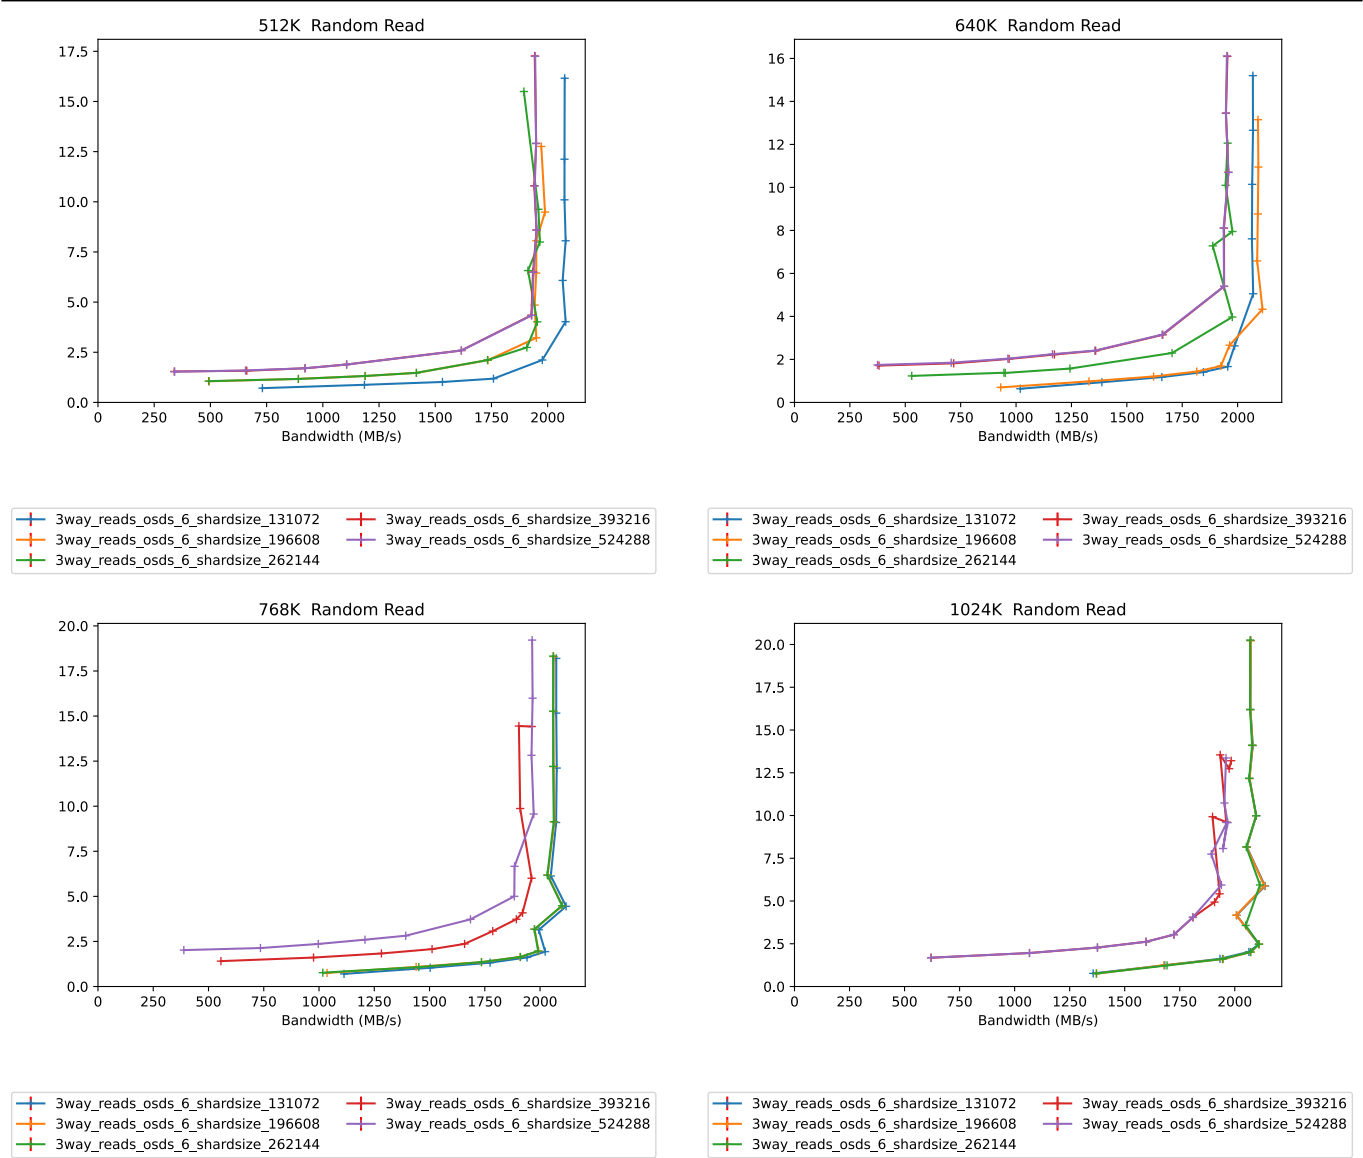

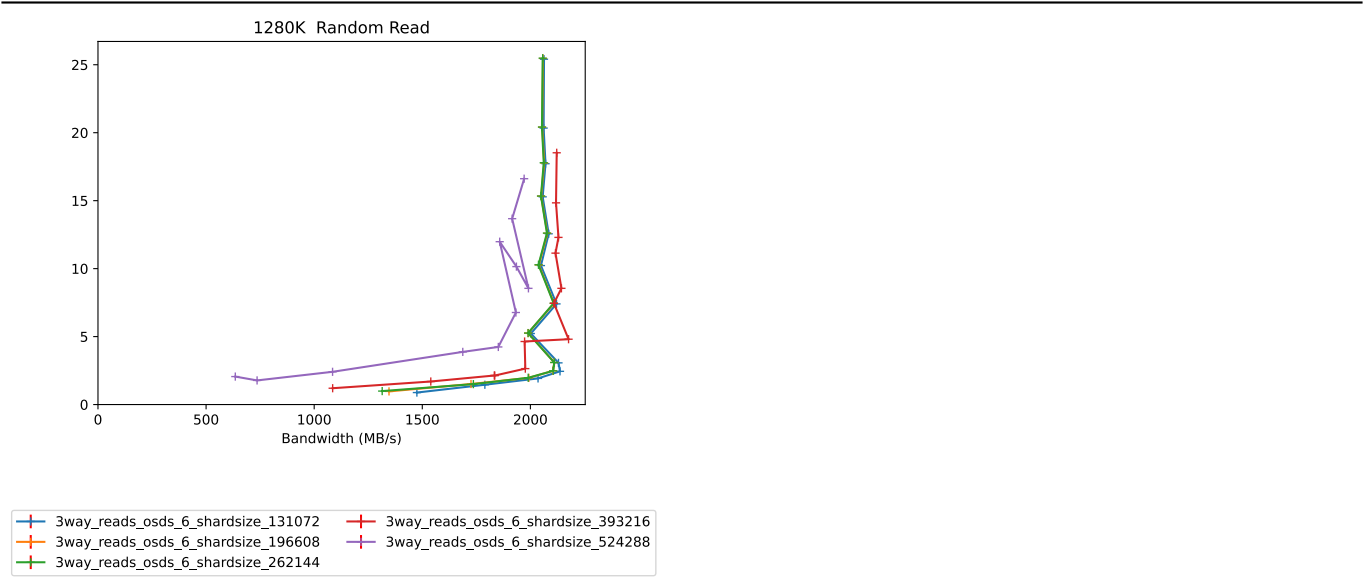

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio2
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 60
  rbdname: cbt-librbd fio
  time: 120
  time_based: true
  use_existing_volumes: true
  vol_size: 1000
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
  workloads:
    1280k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 1310720
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 5
        - 8
        - 12
        - 16
        - 20
        - 24
        - 28
        - 32
        - 40
    1M randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 1048576
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 5
        - 8
        - 12

```

```

- 16
- 20
- 24
- 28
- 32
- 40
512krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 524288
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
    - 16
    - 24
    - 32
    - 40
    - 48
    - 64
640krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 655360
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 16
    - 24
    - 32
    - 40
    - 48
768krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 786432
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 12
    - 16
    - 24
    - 32
    - 40
    - 48
cluster:
  archive_dir: /tmp/cbt

```



```

ceph-mgr_cmd: /usr/bin/ceph-mgr
ceph-mon_cmd: /usr/bin/ceph-mon
ceph-osd_cmd: /usr/bin/ceph-osd
ceph-run_cmd: /usr/bin/ceph-run
ceph_cmd: /usr/bin/ceph
clients:
- --- server1 ---
clusterid: ceph
conf_file: /cbt/ceph.conf.4x1x1.fs
fs: xfs
head: --- server1 ---
iterations: 1
mgrs:
  --- server1 ---:
    a: null
mkfs_opts: -f -i size=2048
mons:
  --- server1 ---:
    a: --- IP Address --:6789
mount_opts: -o inode64,noatime,logbsize=256k
osds:
- --- server1 ---
osds_per_node: 6
pdsh_ssh_args: -a -x -l%u %h
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}

```