

Comparitive Performance Report for 4k-classic-4+2 vs 4k-fastec-4+2 vs 16k-classic-4+2 vs 4k-fastec-4+2

Table of contents

- Comparison summary for 4k-classic-4+2 vs 4k-fastec-4+2 vs 16k-classic-4+2 vs 4k-fastec-4+2
- Response Curves
 - Random Read
 - Random Write
- Configuration yaml files
 - results


Comparison summary for 4k-classic-4+2 vs 4k-fastec-4+2 vs 16k-classic-4+2 vs 4k-fastec-4+2

Random							
Read	4k_classic_4+2	4k_fastec_4+2	%change	16k_classic_4+2	%change	4k_fastec_4+2	%change
16K	30013@17.1ms	24785@15.5	-17%	66275@7.7	121%	24785@15.5	-17%


Random							
Write	4k_classic_4+2	4k_fastec_4+2	%change	16k_classic_4+2	%change	4k_fastec_4+2	%change
16K	8863@57.7ms	8215@62.3	-7%	3707@103.8	-58%	8215@62.3	-7%

Response Curves

Random Read

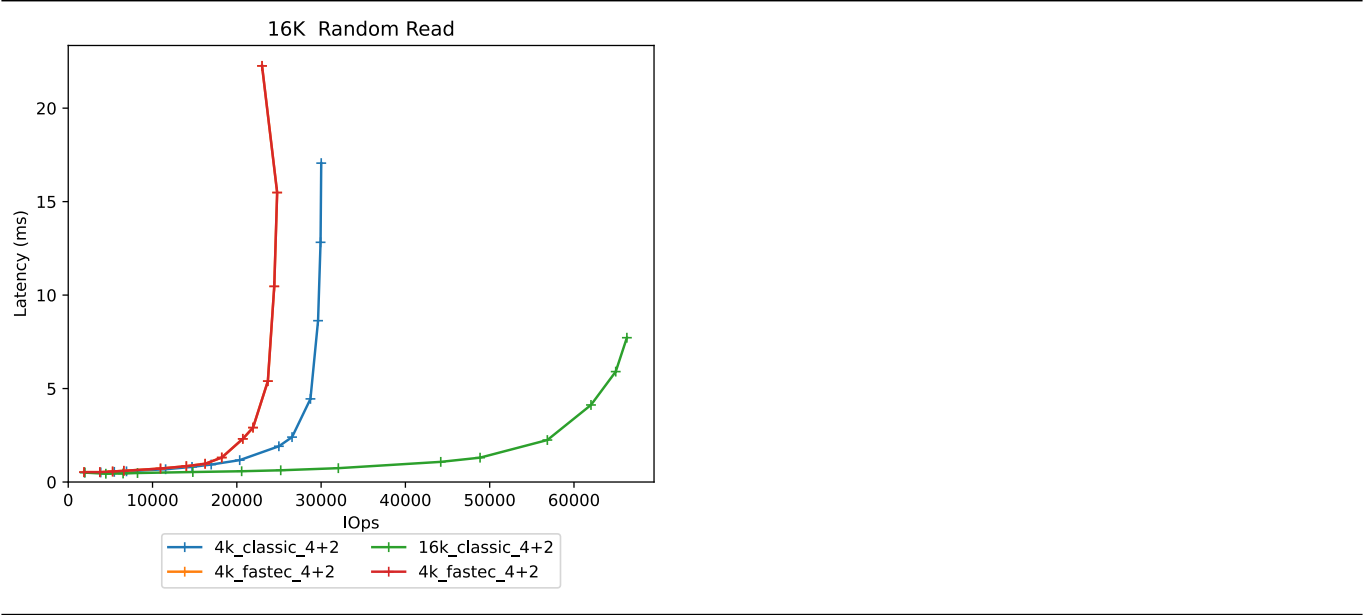

Random Write

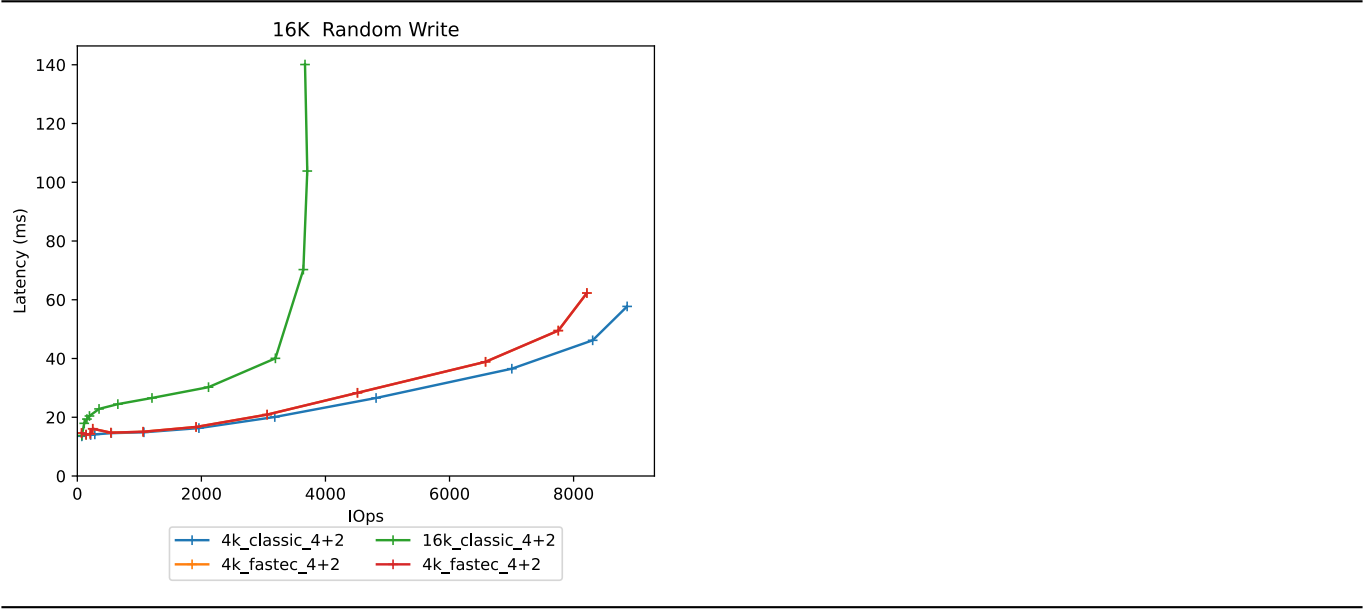

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 55192
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
  workloads:
    16k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 8
        - 12
        - 16
        - 24
        - 48
        - 64
        - 128
        - 256
        - 384
        - 512
    16k randomwrite:
      jobname: randwrite
      mode: randwrite
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 8
        - 16

```

```

    - 32
    - 64
    - 128
    - 256
    - 384
    - 512
cluster:
  archive_dir: /tmp/cbt
  ceph_mgr_cmd: /usr/bin/ceph-mgr
  ceph_mon_cmd: /usr/bin/ceph-mon
  ceph_osd_cmd: /usr/bin/ceph-osd
  ceph_run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
    - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
    - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -FO --rawtoo --sep ";" -f {collectl_dir}
  librbd fio:
    cmd_path: /usr/local/bin/fio
    create_report: true
    fio_out_format: json
    log_avg_msec: 100
    log_bw: true
    log_iops: true
    log_lat: true
    norandommap: true
    osd_ra:
      - 4096
    poolname: rbd_replicated
    prefill:
      blocksize: 64k
      numjobs: 1
    procs_per_volume:
      - 1
    ramp: 30
    rbdname: cbt-librbd fio
    time: 90
    time_based: true
    use_existing_volumes: true

```

```

vol_size: 55192
volumes_per_client:
- 8
wait_pgautoscaler_timeout: 10
workloads:
  16krandomread:
    jobname: randread
    mode: randread
    numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
    - 12
    - 16
    - 24
    - 48
    - 64
    - 128
    - 256
    - 384
    - 512
  16krandomwrite:
    jobname: randwrite
    mode: randwrite
    numjobs:
    - 1
    op_size: 16384
    total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
    - 16
    - 32
    - 64
    - 128
    - 256
    - 384
    - 512
cluster:
  archive_dir: /tmp/cbt
  ceph_mgr_cmd: /usr/bin/ceph-mgr
  ceph_mon_cmd: /usr/bin/ceph-mon
  ceph_osd_cmd: /usr/bin/ceph-osd
  ceph_run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
  - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
  - --- server1 ---:
    a: null
  mkfs_opts: -f -i size=2048

```



```
mons:
  --- server1 ---:
    a: --- IP Address --:6789
mount_opts: -o inode64,noatime,logbsize=256k
osds:
- --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```