

Comparitive Performance Report for 3way-reads-osds-6-shardsize-5000000 vs 3way-reads-osds-6-shardsize-196608 vs 3way-reads-osds-6-shardsize-262144 vs 3way-reads-osds-6-shardsize-524288 vs 3way-reads-osds-6-shardsize-655360

Table of contents


- Comparison summary for 3way-reads-osds-6-shardsize-5000000 vs 3way-reads-osds-6-shardsize-196608 vs 3way-reads-osds-6-shardsize-262144 vs 3way-reads-osds-6-shardsize-524288 vs 3way-reads-osds-6-shardsize-655360
- Response Curves
 - Random Read
- Configuration yaml files
 - results


Comparison summary for 3way-reads-osds-6-shardsize-5000000 vs 3way-reads-osds-6-shardsize-196608 vs 3way-reads-osds-6-shardsize-262144 vs 3way-reads-osds-6-shardsize-524288 vs 3way-reads-osds-6-shardsize-655360

Random									
Read	3way_reads	3way_reads	6-shardsize-5000000	6-shardsize-196608	6-shardsize-262144	6-shardsize-524288	6-shardsize-655360	6-shardsize-262144	6-shardsize-524288
384K	1819@3.5ms	1830@8.6	1%	1821@3.4	0%	1819@3.5	0%	1819@3.5	0%
512K	1818@4.6ms	1853@5.7	2%	1835@3.4	1%	1819@4.6	0%	1819@4.6	0%
640K	1817@5.8ms	2024@6.5	11%	1821@8.6	0%	1817@5.8	0%	1818@5.8	0%
768K	1811@10.4ms	1921@4.9	6%	1920@4.9	6%	1868@20.2	3%	1812@17.4	0%
1024K	1811@11.6ms	1936@6.5	7%	1934@6.5	7%	1874@5.0	3%	1812@11.6	0%
1280K	1811@14.5ms	1930@3.4	7%	1928@3.4	6%	1842@11.4	2%	1817@25.2	0%
1536K	1812@24.3ms	1964@7.2	8%	1962@7.2	8%	1902@8.3	5%	1818@15.6	0%

Response Curves

Random Read

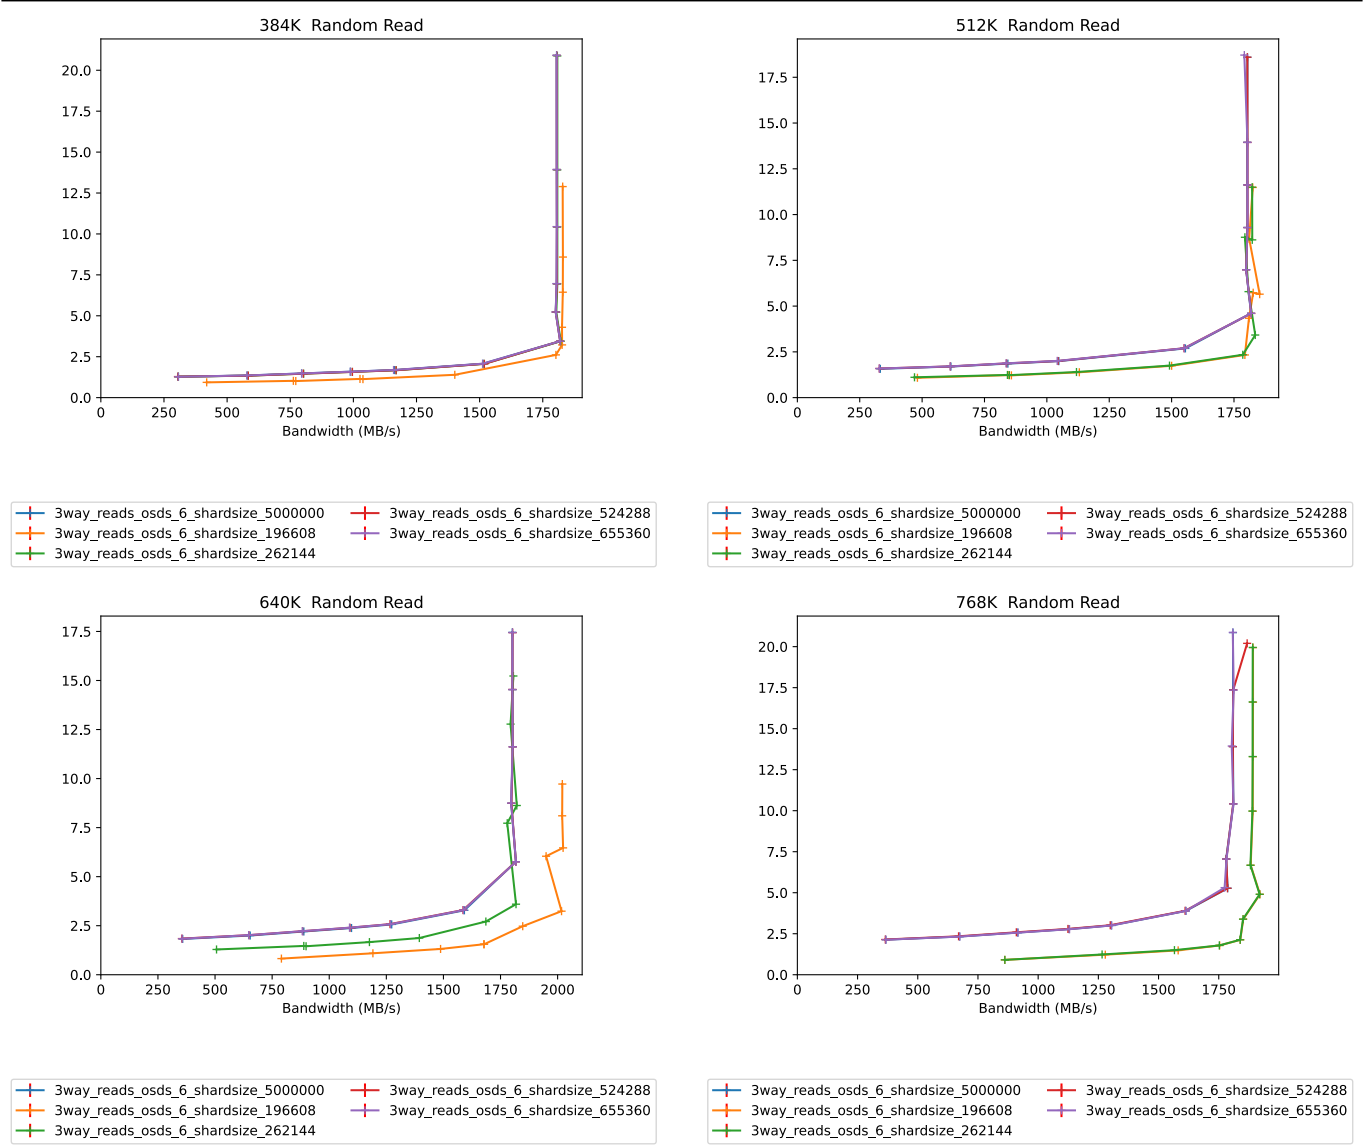

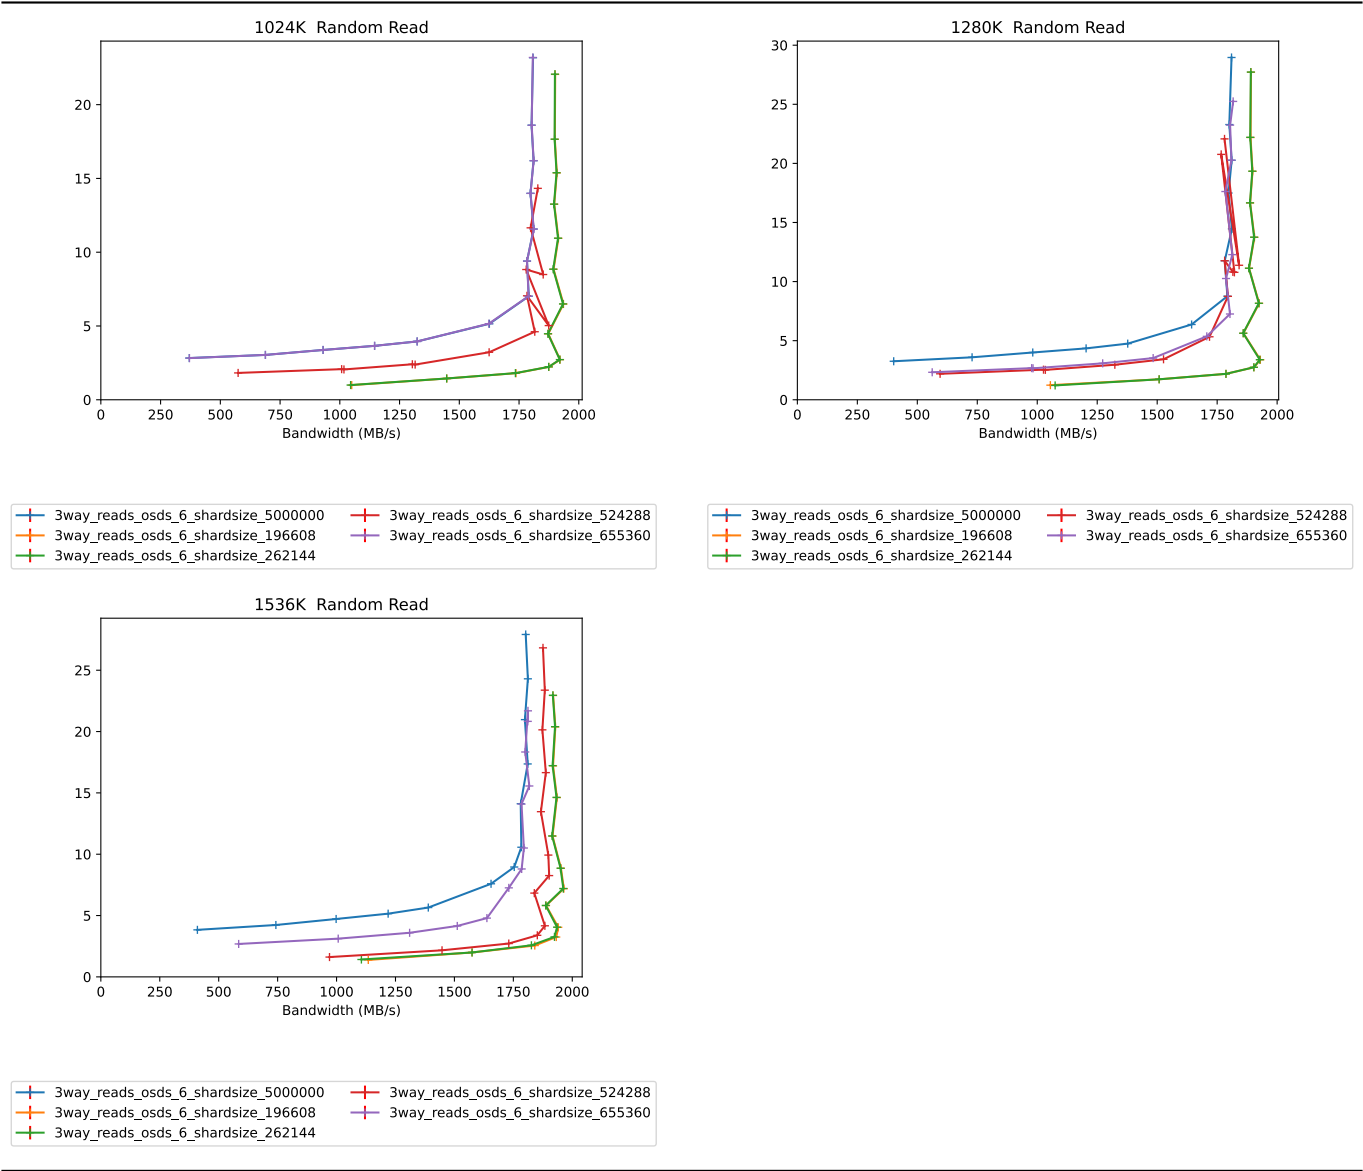

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio2
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 60
  rbdname: cbt-librbd fio
  time: 180
  time_based: true
  use_existing_volumes: true
  vol_size: 1000
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
  workloads:
    1280k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 1310720
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 5
        - 8
        - 12
        - 16
        - 20
        - 24
        - 28
        - 32
        - 40
    1536k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 1572864
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 5
        - 8
        - 10

```

```

- 12
- 16
- 20
- 24
- 28
- 32
1Mrandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 1048576
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 12
    - 16
    - 20
    - 24
    - 28
    - 32
    - 40
384krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 393216
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 16
    - 24
    - 32
    - 48
    - 64
    - 96
512krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 524288
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 8
    - 16
    - 24
    - 32
    - 40
    - 48
    - 64

```



```

640krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 655360
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 16
    - 24
    - 32
    - 40
    - 48
768krandomread:
  jobname: randread
  mode: randread
  numjobs:
    - 1
  op_size: 786432
  total_iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 8
    - 12
    - 16
    - 24
    - 32
    - 40
    - 48
cluster:
  archive_dir: /tmp/cbt
  ceph_mgr_cmd: /usr/bin/ceph-mgr
  ceph_mon_cmd: /usr/bin/ceph-mon
  ceph_osd_cmd: /usr/bin/ceph-osd
  ceph_run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
    - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
      a: --- IP Address ---:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
    - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h

```

```
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```