

Comparitive Performance Report for classic-4k vs fastec-4k

Table of contents


- Comparison summary for classic-4k vs fastec-4k
- Response Curves
 - Random Read
- Configuration yaml files
 - results

Comparison summary for classic-4k vs fastec-4k

Random Read	classic-4k	fastec-4k	%change throughput	%change latency
16K	25898 IOps@19.8ms	25506 IOps@15.0ms	-2%	-24%

Response Curves

Random Read

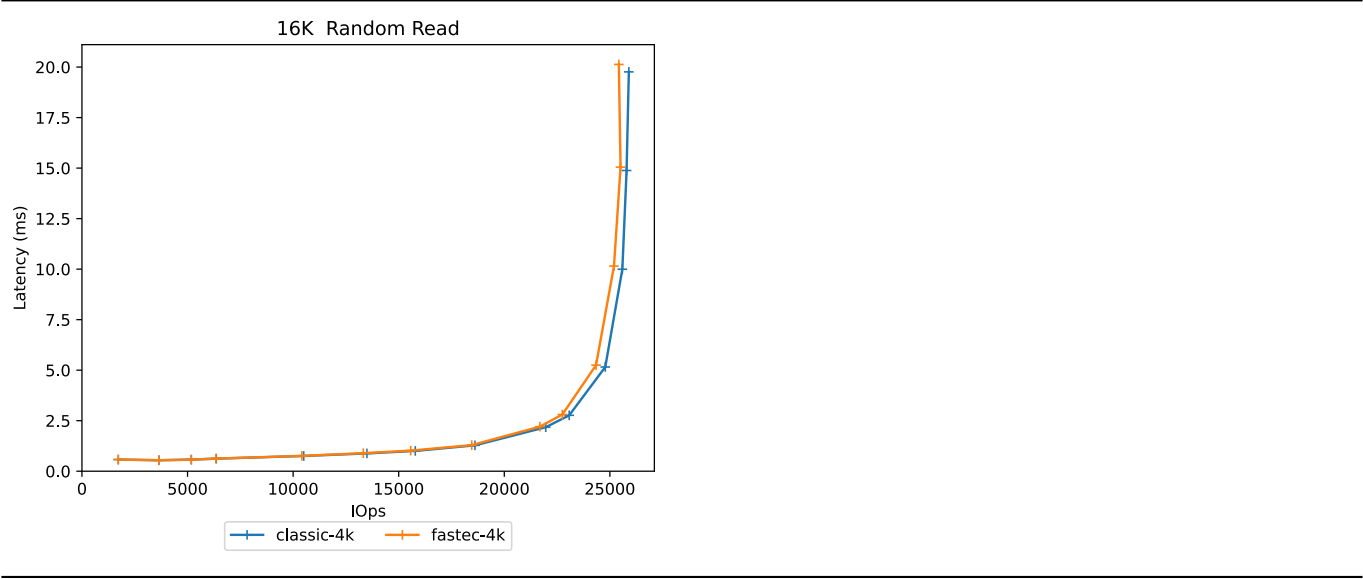

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 55192
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
  workloads:
    16k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 16384
      total_iodepth:
        - 1
        - 2
        - 3
        - 4
        - 8
        - 12
        - 16
        - 24
        - 48
        - 64
        - 128
        - 256
        - 384
        - 512
cluster:
  archive_dir: /tmp/cbt
  ceph_mgr_cmd: /usr/bin/ceph-mgr
  ceph_mon_cmd: /usr/bin/ceph-mon
  ceph_osd_cmd: /usr/bin/ceph-osd
  ceph_run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
    - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---

```

```

iterations: 1
mgrs:
  --- server1 ---:
    a: null
mkfs_opts: -f -i size=2048
mons:
  --- server1 ---:
    a: --- IP Address --:6789
mount_opts: -o inode64,noatime,logbsize=256k
osds:
  - --- server1 ---
osds_per_node: 6
pdsh_ssh_args: -a -x -l%u %h
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -FO --rawtoo --sep ";" -f {collectl_dir}
librbd fio:
  cmd_path: /usr/local/bin/fio
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 55192
  volumes_per_client:
    - 8
  wait_pgautoscaler_timeout: 10
workloads:
  16k randomread:
    jobname: randread
    mode: randread
    numjobs:
      - 1
    op_size: 16384
    total_iodepth:
      - 1
      - 2
      - 3
      - 4
      - 8
      - 12
      - 16

```

```

- 24
- 48
- 64
- 128
- 256
- 384
- 512
cluster:
  archive_dir: /tmp/cbt
  ceph-mgr_cmd: /usr/bin/ceph-mgr
  ceph-mon_cmd: /usr/bin/ceph-mon
  ceph-osd_cmd: /usr/bin/ceph-osd
  ceph-run_cmd: /usr/bin/ceph-run
  ceph_cmd: /usr/bin/ceph
  clients:
    - --- server1 ---
  clusterid: ceph
  conf_file: /cbt/ceph.conf.4x1x1.fs
  fs: xfs
  head: --- server1 ---
  iterations: 1
  mgrs:
    --- server1 ---:
      a: null
  mkfs_opts: -f -i size=2048
  mons:
    --- server1 ---:
      a: --- IP Address --:6789
  mount_opts: -o inode64,noatime,logbsize=256k
  osds:
    - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  rados_cmd: /usr/bin/rados
  rbd_cmd: /usr/bin/rbd
  tmp_dir: /tmp/cbt
  use_existing: true
  user: root
  monitoring_profiles:
    collectl:
      args: -c 18 -sCD -i 10 -P -oz -FO --rawtoo --sep ";" -f {collectl_dir}

```