

Comparitive Performance Report for cbt vs cbt

Table of contents

- Comparison summary for cbt vs cbt
- Response Curves
 - Number of Jobs 1
 - * Random Write
- Configuration yaml files
 - results


Comparison summary for cbt vs cbt

Random Write	numjobs	cbt	cbt	%change throughput	%change latency
4K	1	59049 IOps@12.7ms	59049 IOps@12.7ms	0%	0%

Response Curves

Number of Jobs 1

Random Write

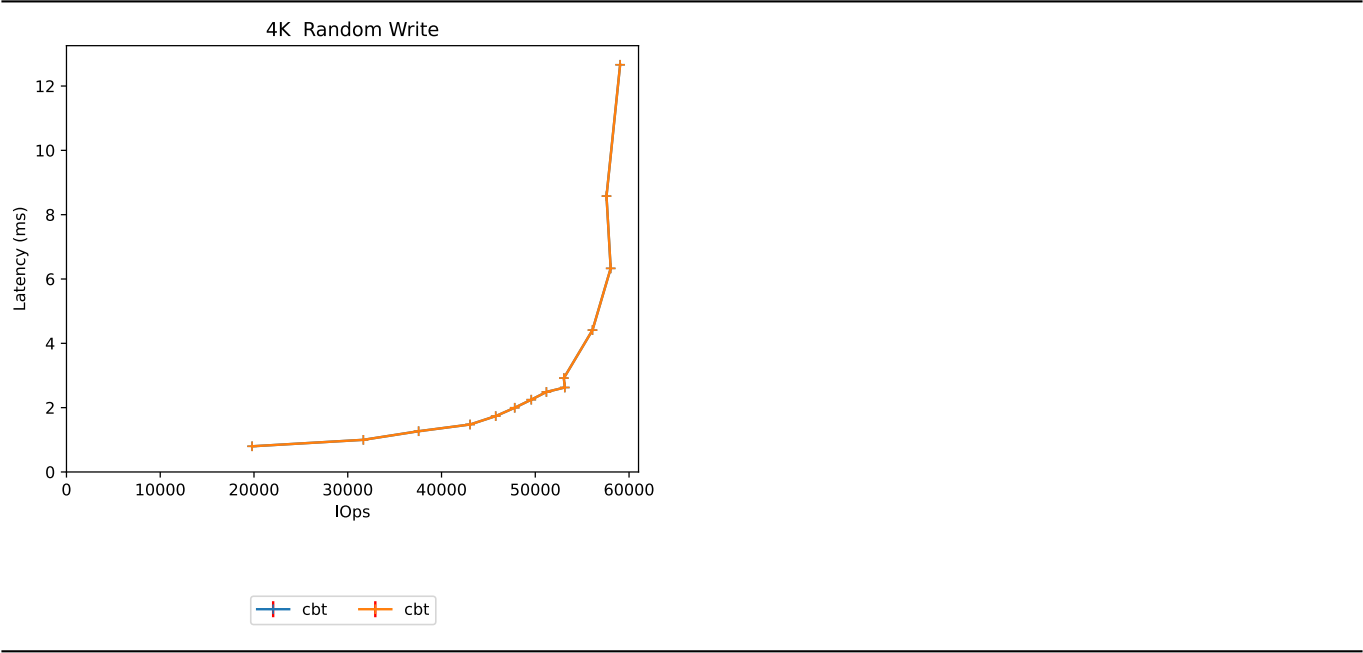

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

rawfio:
  block_devices:
    - /dev/nvme8n1
    - /dev/nvme8n2
    - /dev/nvme8n3
    - /dev/nvme8n4
    - /dev/nvme8n5
    - /dev/nvme8n6
    - /dev/nvme8n7
    - /dev/nvme8n8
    - /dev/nvme8n9
    - /dev/nvme8n10
    - /dev/nvme8n11
    - /dev/nvme8n12
    - /dev/nvme8n13
    - /dev/nvme8n14
    - /dev/nvme8n15
    - /dev/nvme8n16
  client_ra: 128
  concurrent_procs: 16
  direct: 1
  fio_cmd: /usr/local/bin/fio
  iodepth:
    - 1
    - 2
    - 3
    - 4
    - 5
    - 6
    - 7
    - 8
    - 9
    - 10
    - 16
    - 24
    - 32
    - 48
  ioengine: libaio
  iterations: 1
  mode:
    - randwrite
  numjobs: 1
  op_size:
    - 4096
  osd_ra:
    - 4096
  ramp: 10
  time: 10
  vol_size: 100
cluster:
  archive_dir: /tmp/cbt
  clients:
    - --- server1 ---
  head: --- server1 ---
  iterations: 1
  osds:
    - --- server1 ---
  osds_per_node: 6
  pdsh_ssh_args: -a -x -l%u %h
  tmp_dir: /tmp/cbt
  use_existing: true

```

```
  user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}
```