

Comparitive Performance Report for direct-reads-alexpoc-ec-4+2-16k-balance- off-32konly vs direct-reads-alexpoc-ec-4+2-16k-balance- on-32konly

Table of contents


- Comparison summary for direct-reads-alexpoc-ec-4+2-16k-balance-off-32konly vs direct-reads-alexpoc-ec-4+2-16k-balance-on-32konly
- Response Curves
 - Random Read
- Configuration yaml files
 - results

Comparison summary for direct-reads-alexpoc-ec-4+2-16k-balance-off-32konly vs direct-reads-alexpoc-ec-4+2-16k-balance-on-32konly

Random Read	direct_reads_alexpoc_ec-4+2-16k-balance-off-32konly	direct_reads_alexpoc_ec-4+2-16k-balance-on-32konly	throughput	latency
32K	95564 IOps@3.3ms	108436 IOps@2.9ms	13%	-12%

Response Curves

Random Read

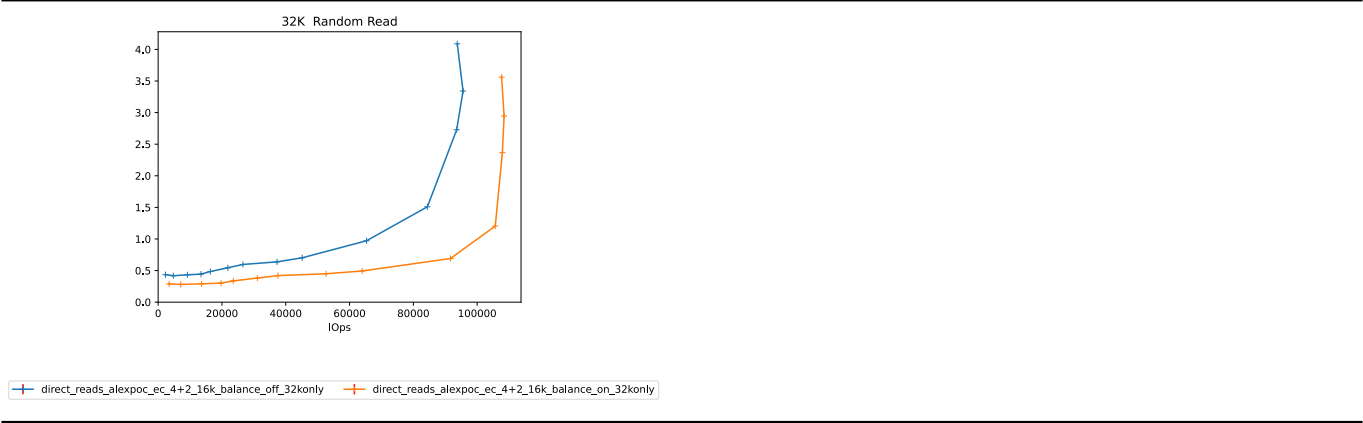

Configuration yaml files

Only yaml files that differ by more than 20 lines from the yaml file for the baseline directory will be added here in addition to the baseline yaml

results

```

librbd fio:
  cmd_path: /usr/local/bin/fio2
  create_report: true
  fio_out_format: json
  log_avg_msec: 100
  log_bw: true
  log_iops: true
  log_lat: true
  norandommap: true
  osd_ra:
    - 4096
  poolname: rbd_replicated
  prefill:
    blocksize: 64k
    numjobs: 1
  procs_per_volume:
    - 1
  ramp: 30
  rbdname: cbt-librbd fio
  time: 90
  time_based: true
  use_existing_volumes: true
  vol_size: 10
  volumes_per_client:
    - 16
  wait_pgautoscaler_timeout: 10
  workloads:
    32k randomread:
      jobname: randread
      mode: randread
      numjobs:
        - 1
      op_size: 32768
      total_iodepth:
        - 1
        - 2
        - 4
        - 6
        - 8
        - 12
        - 16
        - 24
        - 32
        - 64
        - 128
        - 256
        - 320
        - 384
    precondition:
      jobname: precond1rw
      mode: randwrite
      monitor: false
      numjobs:
        - 1
      op_size: 65536
      time: 10
      total_iodepth:
        - 16
  cluster:
    archive_dir: /tmp/cbt
    ceph_mgr_cmd: /usr/bin/ceph-mgr

```

```

ceph-mon_cmd: /usr/bin/ceph-mon
ceph-osd_cmd: /usr/bin/ceph-osd
ceph-run_cmd: /usr/bin/ceph-run
ceph_cmd: /usr/bin/ceph
clients:
- --- server1 ---
clusterid: ceph
conf_file: /cbt/ceph.conf.4x1x1.fs
fs: xfs
head: --- server1 ---
iterations: 1
mgrs:
  --- server1 ---:
    a: null
mkfs_opts: -f -i size=2048
mons:
  --- server1 ---:
    a: --- IP Address ---:6789
mount_opts: -o inode64,noatime,logbsize=256k
osds:
- --- server1 ---
osds_per_node: 6
pdsh_ssh_args: -a -x -l%u %h
rados_cmd: /usr/bin/rados
rbd_cmd: /usr/bin/rbd
tmp_dir: /tmp/cbt
use_existing: true
user: root
monitoring_profiles:
  collectl:
    args: -c 18 -sCD -i 10 -P -oz -F0 --rawtoo --sep ";" -f {collectl_dir}

```