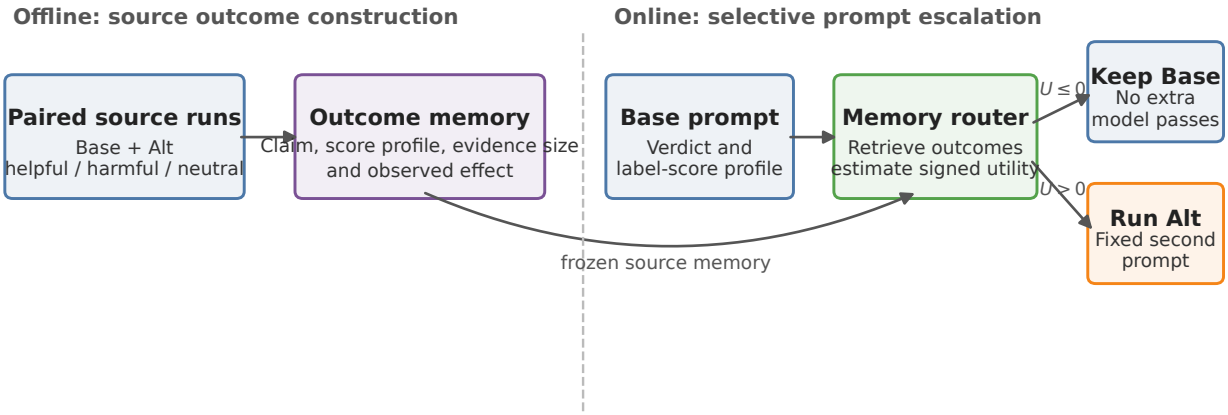
Offline: source outcome construction
Online: selective prompt escalation
Paired source runs
Base + Alt
helpful / harmful / neutral
Outcome memory
Claim, score profile, evidence size
and observed effect
Base prompt
Verdict and
label-score profile
Memory router
Retrieve outcomes
estimate signed utility
U ≤ 0
U > 0
Keep Base
No extra
model passes
Run Alt
Fixed second
prompt
frozen source memory
Non-parametric routing: source labels build memory; target labels are never used for routing.