

Atlas Copco Power Technique — Campaign System Audit

Prepared for: Lee Allen, National Business Development Manager

Date: 12 April 2026

System: Atlas Copco Market Intelligence Platform — Campaign Builder Module

1. Executive Summary

The Campaign Builder is a self-service outreach system that takes a user from a raw spreadsheet of company names or contacts through to personalised, AI-generated emails sent via Resend. The pipeline has six major stages: **File Upload & Detection**, **Company Search (with LLM Domain Inference)**, **Contact Import & Scoring**, **Waterfall Enrichment**, **AI Email Generation**, and **Approval & Sending**. This document traces every code path, database interaction, API call, and scoring decision so that you can examine the system's behaviour, identify bottlenecks, and make informed recommendations.

2. System Architecture Overview

The campaign system is built across the following server-side modules, each responsible for a distinct concern:

Module	Responsibility	Key APIs Used
<code>campaignCsvImport.ts</code>	File parsing, column detection, company-vs-contact classification	XLSX library
<code>companySearchJob.ts</code>	Background job: LLM domain inference → Hunter search → Apollo fallback	LLM, Hunter.io, Apollo
<code>domainInference.ts</code>	LLM-powered company name → domain resolution	Built-in LLM (invokeLLM)
<code>hunterContactSearch.ts</code>	Hunter.io Domain Search with role-based filtering	Hunter.io Domain Search
<code>hunterService.ts</code>	Hunter.io API wrapper (Domain Search, Email Finder, Email Verifier)	Hunter.io v2 API
<code>apolloEnrichment.ts</code>	Apollo People Search (free) + People Enrichment (1 credit each)	Apollo.io v1 API
<code>campaignService.ts</code>	Campaign CRUD, contact import, scoring, enrichment orchestration, email generation, approval, sending	All of the above + Resend
<code>outreachEmail.ts</code>	AI-powered personalised email generation	Built-in LLM (invokeLLM)
<code>emailSender.ts</code>	Email delivery via Resend API	Resend API

The frontend is a multi-step wizard in `CampaignBuilder.tsx` that guides the user through campaign creation, file upload, contact review, and launch.

3. Stage 1: File Upload & Detection

3.1 What Happens When You Upload a File

When a CSV or Excel file is uploaded, the system runs through three sequential steps:

- 1. Preview Generation** (`previewImportFile`): The file is parsed using the XLSX library. The first row is treated as headers, and the next 5 rows are returned as a

sample preview. Column mapping is auto-detected by matching header text against known patterns.

2. **File Analysis** (`analyseImportFile`): Each data row is classified as either “has individual names” (firstName, lastName, fullName, or email present) or “company-only” (has company/domain but no personal identifiers). If more than **60% of non-empty rows are company-only**, the file is classified as `type: "companies"`. Otherwise it is `type: "contacts"`.
3. **Frontend Routing**: Based on the analysis result, the CampaignBuilder UI shows either:
 - **Contact Import Flow** — direct mapping and import of individual contacts
 - **Company List Detected** banner — prompting the user to select target roles and click “Find Contacts at These Companies”

3.2 Column Detection Patterns

The system recognises the following header patterns for auto-mapping:

Field	Recognised Headers
firstName	first name , first , given name , fname , contact first
lastName	last name , last , surname , family name , lname , contact last
fullName	name , full name , contact name , person , contact
title	title , job title , position , role , designation
company	company , organization , organisation , employer , account name , company name
email	email , e-mail , email address , contact email
phone	phone , telephone , tel , phone number , work phone , office phone
mobile	mobile , cell , mobile phone , cell phone
linkedin	linkedin , linkedin url , linkedin profile , li url
website	website , web , url , company website , domain

For company-list files, additional patterns are recognised:

Field	Recognised Headers
company	company , organization , employer , account name , company name , business , name
domain	domain , website , web , url , company website , company domain , site
location	location , city , state , region , country , address , hq
notes	notes , comment , description , details , info

3.3 Your Specific File: What Happened

Your uploaded file (Company_Names_Deduped.csv) had a single column header "Company Name" with 378 rows of drilling company names and no other columns. The system correctly:

- Matched "Company Name" to the `company` field via the `name` pattern
- Classified 100% of rows as company-only → `type: "companies"`
- Showed the "Company List Detected" banner

Key insight: The `"name"` pattern in `COMPANY_LIST_PATTERNS` is what caught your single-column file. Without this pattern, the system would have tried to interpret "Company Name" as a `fullName` field (individual contact names), which would have produced garbage results.

4. Stage 2: Company Search (Background Job with LLM Domain Inference)

When the user clicks "Find Contacts at These Companies", the system starts a background job that runs a 3-phase pipeline. This was recently redesigned to handle large company lists (like your 378 companies) without HTTP timeouts.

4.1 Phase 0: LLM Domain Inference

Purpose: Most company lists (especially drilling companies) don't include website domains. Without a domain, Hunter.io Domain Search cannot be used. The LLM infers the most likely domain for each company.

How it works:

- Companies are batched in groups of **20** to minimise LLM calls
- Each batch is sent to the LLM with a system prompt specialised for Australian mining, drilling, construction, and energy companies
- The LLM returns structured JSON with `{ company, domain, confidence }` for each company
- Confidence levels: **high** (certain, e.g., "Boart Longyear" → `boartlongyear.com`), **medium** (likely but not certain), **low** (unknown or too generic)

Routing decision after inference:

- **High or medium confidence** → routed to Phase 1 (Hunter.io Domain Search)

- **Low confidence or null domain** → routed to Phase 2 (Apollo company name search)

Rate limiting: 500ms delay between batches to avoid LLM rate limits.

Failure handling: If a batch fails, all companies in that batch are assigned `confidence: "low"` and routed to Apollo fallback. If the entire inference step fails, all companies go to Apollo.

4.2 Phase 1: Hunter.io Domain Search

Purpose: For companies with known or inferred domains, Hunter.io returns all email addresses associated with that domain, along with names, titles, confidence scores, and LinkedIn URLs.

How it works:

- Each domain is searched via `domainSearch(domain, { type: "personal", limit: 100 })`
- Returns up to 100 personal email addresses per domain
- Each result includes: email, first_name, last_name, position, confidence (0-100), LinkedIn URL, phone number

Role filtering (applied to each returned contact):

1. **Exclusion filter:** Contacts with irrelevant titles are removed (HR, marketing, finance, legal, IT, reception, admin, sales reps)
2. **Role match filter:** If target roles were selected, only contacts matching those role patterns are kept
3. **Generic email filter:** Emails like `info@`, `sales@` are excluded
4. **Confidence filter:** Contacts with confidence below 30 are excluded

Rate limiting: 200ms between domain searches (5 req/s, well within Hunter's 15 req/s limit).

Cost: 1 Hunter.io API request per domain searched. No per-email cost.

4.3 Phase 2: Apollo Company Name Search (Fallback)

Purpose: For companies where the LLM couldn't determine a domain, Apollo's People Search API is used to find contacts by company name.

How it works:

- Searches `apolloPeopleSearch({ organizationName, personTitles, organizationLocations: ["Australia"], perPage: 50 })`
- Returns obfuscated results: first name, last name (obfuscated, e.g., "Co***s"), title, Apollo ID, `has_email` flag
- **No emails are returned** — Apollo Search is free but only returns metadata
- Contacts are imported with `enrichmentStatus: "pending"` so they can be enriched later

Role filtering: Same exclusion and role-match logic as Hunter, but applied to Apollo's title field.

Rate limiting: 300ms between company searches.

Cost: Free — Apollo People Search does not consume credits.

4.4 Predefined Target Roles

The system offers 10 predefined role categories that the user can select before searching:

Role Key	Display Name	Example Titles Matched
rc_driller	RC Drillers	drill, RC, reverse circ, bore hole, rig manager
water_well	Water Well Drillers	water well, bore drill, hydro, ground water
exploration	Exploration	exploration, geologist, geotechnical, mineral
blasting	Blasting & Coating	blast, coat, paint, surface prep, corrosion, abrasive, NACE, UHP
operations	Operations & Management	operations, general manager, managing director, CEO, COO, director
procurement	Procurement & Purchasing	procurement, purchasing, supply chain, buyer, sourcing
project_management	Project Management	project manager, project director, project engineer
fleet_equipment	Fleet & Equipment	fleet, equipment, plant manager, maintenance, workshop, mechanic
engineering	Engineering	engineer, technical, design
site_management	Site Management	site manager, site supervisor, foreman, supervisor, area manager

4.5 Caps and Limits

Parameter	Default Value	Purpose
Max contacts per company	25 (Apollo) / 50 (Hunter)	Prevents one large company from dominating results
Max total contacts	2,000	Prevents runaway searches
Job TTL	30 minutes	Auto-cleanup of completed/stale jobs from memory

5. Stage 3: Contact Import & Scoring

5.1 Import Process

After the company search completes (or after a direct contact CSV upload), the contacts are imported into the `campaignContacts` table via `importCampaignContacts()`. During import, each contact is:

1. **Filtered:** Contacts flagged as “non-company” or “do-not-use” are excluded. Contacts with no name are excluded. Contacts with personal email domains (Gmail, Hotmail, Yahoo, Outlook, Bigpond, Optusnet, etc.) are excluded.
2. **Scored:** A composite score (0-100) is computed based on four factors.
3. **Tiered:** Based on the score and data completeness, contacts are assigned to one of five tiers.
4. **Batch inserted:** Contacts are inserted in batches of 500 for performance.

5.2 Scoring Algorithm

The composite score is built from four additive components:

Component	Points	Logic
Title Relevance	0-40	Blasting specialist: 40 pts. Decision maker: 35 pts. Operations: 20 pts. Other: 10 pts. Unknown/excluded: 0-5 pts.
Data Completeness	0-20	Has email: +15 pts. Has mobile: +5 pts.
Blasting Company Bonus	0-20	Company name matches blasting/coating/surface prep patterns: +20 pts.
Project Match Bonus	0-30	Each matched project: +5 pts (capped at 30 pts for 6+ matches).
Combo Bonus	0-10	Blasting specialist at a blasting company: +10 pts.

Maximum possible score: 100 (capped).

5.3 Title Classification Hierarchy

Titles are classified in this priority order:

1. **Excluded** (score: 5): accounts, admin, store, reception, office manager, customer care, sales rep
2. **Blasting Specialist** (score: 40): blast, paint, coat, surface treat/protect/prep, corrosion, abrasive, sandblast, UHP, NACE
3. **Decision Maker** (score: 35): managing director, general manager, CEO, COO, director, owner, operations manager, project manager, procurement, fleet manager, equipment manager, maintenance manager
4. **Operations** (score: 20): supervisor, superintendent, coordinator, foreman, estimator, engineer, inspector, planner, site manager, area manager, branch manager
5. **Other** (score: 10): any title not matching the above

5.4 Tiering Rules

Tier	Label	Criteria
tier1_hot	Hot	Score >= 55 AND has email
tier2_warm	Warm	Score >= 35 AND has email
tier3_enrich	Enrich	Score >= 15 (no email required)
tier4_low	Low	Score < 15
excluded	Excluded	Filtered out during import

Key observation: A contact **cannot** be Tier 1 (Hot) or Tier 2 (Warm) without an email address, regardless of their score. This means contacts imported from Apollo (which never returns emails) will always start as Tier 3 (Enrich) until they go through the waterfall enrichment.

5.5 Blasting Company Detection

The following company name patterns trigger the +20 point blasting company bonus:

blast, abrasive, surface prep/treat/protect, corrosion, coating, painting service/contractor/solution, sandblast, UHP, hydro blast, grit blast, rope access, scaffold, insulation, fireproof, Kaefer, Altrad, Monadelphous, Linkforce, Master Flow, Rema Tip, Cleanco, WA Corrosion, Matrix Corrosion

6. Stage 4: Waterfall Enrichment

After contacts are imported and scored, the enrichment pipeline runs to find verified email addresses for contacts that don't have them. This is a two-step waterfall: **Apollo first, then Hunter.io for misses**.

6.1 Enrichment Selection

Contacts are selected for enrichment based on:

- `enrichmentStatus = "pending"` (contacts imported without an email)
- Ordered by **score descending** (highest-value contacts enriched first)
- Limited to a configurable batch size (default: 50 per run)

6.2 Step 1: Apollo Enrichment

Two paths depending on whether the contact has a stored Apollo Person ID:

Path A — Direct Enrichment (contact has `apolloPersonId` from the search phase):

- Calls Apollo People Enrichment API with the stored ID
- **Costs 1 Apollo credit per contact**
- Returns: full name, verified email, email status, LinkedIn URL, photo, city, state, country, seniority
- If email is found → contact is marked `enriched` with `enrichmentSource: "apollo"`
- If no email → contact is added to the Apollo-missed list for Hunter fallback

Path B — Search-then-Enrich (contact has no stored Apollo ID):

- First searches Apollo People Search using: company domain (if available), title, name keywords, location (“Australia”)
- Matches the best result by name similarity
- If the best match has `has_email: true`, enriches that person (1 credit)
- If enrichment returns an email → marked `enriched`
- Otherwise → added to Apollo-missed list

Rate limiting: 300-500ms between Apollo API calls.

Daily cap: 200 Apollo credits per day (configurable via `DAILY_ENRICHMENT_CAP`).

6.3 Step 2: Hunter.io Enrichment (Fallback)

For contacts that Apollo couldn’t enrich, Hunter.io is used as a fallback. This only runs if `HUNTER_API_KEY` is configured.

Strategy:

1. Group Apollo-missed contacts by company
2. For each company, extract the email domain (if any contact has an email)
3. Run Hunter Domain Search on each unique domain
4. Match returned emails to contacts by first/last name (exact match, partial match, or email pattern match)
5. For unmatched contacts with a known domain, use Hunter Email Finder as a last resort

Matching logic (in priority order):

1. Exact match: first name AND last name match
2. Partial match: first name matches AND last name starts with same letter
3. Email pattern match: email contains `firstname.lastname` or `firstinitiallastname`

After enrichment, each contact’s score is recomputed (the +15 email bonus now applies) and their tier may upgrade from Tier 3 to Tier 1 or Tier 2.

6.4 Enrichment Status Values

Status	Meaning
not_needed	Contact was imported with an email — no enrichment required
pending	Contact needs enrichment (no email yet)
enriched	Email found via Apollo or Hunter
not_found	Both Apollo and Hunter failed to find an email
failed	API error during enrichment

7. Stage 5: AI Email Generation

Once contacts are enriched with email addresses, personalised outreach emails can be generated.

7.1 Email Generation Inputs

The AI email generator (`outreachEmail.ts`) receives:

- **Contact info:** name, title, company, email, role bucket (inferred from title)
- **Project context:** if the contact’s company matches any projects linked to the campaign’s collateral, the top project’s name, location, sector, and equipment signals are included
- **Collateral context:** the campaign’s linked product (e.g., “DrillAir X1350 — Short-Package 25 Bar Truck-Deck Compressor”)
- **Sender info:** name, title, company (“Atlas Copco Australia - Power Technique”)
- **Tone:** one of `professional`, `consultative`, `direct`, `contractor_focused`, `owner_epc_focused`, `procurement_led`, `engineering_led`, `first_touch`

7.2 Role Bucket Inference

The contact’s title is mapped to a role bucket for email personalisation:

Title Pattern	Role Bucket
blast, paint, coat, surface, corrosion, abrasive	construction
procurement, purchasing, supply	procurement
engineer	engineering
operations, ops	operations
project manager, project director	project_management
maintenance, workshop	maintenance
fleet, equipment	fleet
managing director, general manager, CEO, director, owner	executive
(everything else)	other

7.3 Project Matching

Before email generation, the system cross-references campaign contacts against projects matched to the campaign's collateral:

- Gets all projects linked to the campaign's collateral via `collateralProjectMatches`
- For each contact, does a fuzzy company name match against project owners
- Matched contacts get `matchedProjectIds` and `matchedProjectCount` updated
- Their score is recomputed with the project match bonus (+5 per match, up to +30)

7.4 Email Output

Each generated email includes:

- **Subject line:** personalised with the contact's company and relevant project/product

- **Body:** markdown-formatted, personalised based on role bucket, project context, and collateral
- **Key points:** bullet points summarising the email's main value propositions
- **Tone used:** the actual tone applied (may differ from requested if the system adapts)

The draft is saved to the contact record with `outreachStatus: "pending_approval"`.

8. Stage 6: Approval & Sending

8.1 Approval Workflow

Status	Meaning	Next Action
<code>not_started</code>	No email drafted yet	Generate email
<code>email_drafted</code>	Draft exists	Review draft
<code>pending_approval</code>	Draft generated, awaiting review	Approve or reject
<code>approved</code>	Approved for sending	Send email
<code>rejected</code>	Draft rejected — cleared for regeneration	Regenerate email
<code>sent</code>	Email sent via Resend	Done
<code>replied</code>	Recipient replied	Track engagement
<code>bounced</code>	Email bounced	Review contact data
<code>opted_out</code>	Recipient opted out	Do not contact

8.2 Email Sending

Emails are sent via the **Resend API** using the configured `EMAIL_FROM_ADDRESS` (default: Atlas Copco PT Intelligence <digest@ptatlascopcointel.com>).

Attachments: If the campaign has a linked collateral item (e.g., the X1350 flyer PDF), it is automatically attached to every outgoing email. If no collateral is linked, the system falls back to attaching the XAVS1800 flyer if one exists in the collateral library.

Mark as Sent: For users who prefer to send via Outlook or another external client, there is a `markEmailAsSent` function that updates the status without actually sending through Resend.

9. Database Schema

9.1 Campaigns Table

Column	Type	Purpose
id	int (PK)	Auto-incrementing campaign ID
name	varchar(256)	Campaign name (e.g., “X1350 Drill Campaign”)
description	text	Campaign description
collateralId	int	Linked collateral item ID
collateralName	varchar(256)	Display name of linked collateral
senderName	varchar(128)	Sender’s display name
senderEmail	varchar(320)	Sender’s email address
senderTitle	varchar(256)	Sender’s job title
targetSegment	varchar(128)	Target segment (e.g., “blasting”, “drilling”)
status	enum	draft , active , paused , completed
totalContacts	int	Denormalised count of contacts
enrichedContacts	int	Denormalised count of enriched contacts
emailsDrafted	int	Denormalised count of drafted emails
emailsApproved	int	Denormalised count of approved emails
emailsSent	int	Denormalised count of sent emails
createdBy	int	User ID of campaign creator

9.2 Campaign Contacts Table

Column	Type	Purpose
id	int (PK)	Auto-incrementing contact ID
campaignId	int	Foreign key to campaigns
firstName , lastName	varchar	Contact name
title	varchar(256)	Job title
company	varchar(256)	Company name (as imported)
reviewedCompanyName	varchar(256)	Cleaned/verified company name
email	varchar(320)	Original email (from import)
phone , mobile	varchar(64)	Phone numbers
score	int	Composite score (0-100)
tier	enum	tier1_hot , tier2_warm , tier3_enrich , tier4_low , excluded
titleRelevance	enum	blasting_specialist , decision_maker , operations , other , unknown
enrichmentStatus	enum	not_needed , pending , enriched , not_found , failed
enrichmentSource_cc	enum	apollo , hunter , manual
apolloPersonId	varchar(128)	Stored Apollo ID for direct enrichment
enrichedEmail	varchar(320)	Email found via enrichment
enrichedTitle	varchar(256)	Updated title from enrichment
enrichedLinkedin	varchar(512)	LinkedIn URL from enrichment
hunterConfidence	int	Hunter.io confidence score (0-100)
hunterVerificationStatus	varchar(32)	valid , accept_all , unknown , invalid

Column	Type	Purpose
matchedProjectIds	json	Array of matched project IDs
matchedProjectCount	int	Number of matched projects
outreachStatus	enum	Full outreach lifecycle status
draftSubject , draftBody	text	Generated email draft
draftKeyPoints	json	Key points from the AI-generated email
draftTone	varchar(64)	Tone used for the draft
sentEmailId	varchar(128)	Resend email ID after sending

10. API Credit Consumption







Understanding credit usage is critical for cost management:

Action	API	Credit Cost	When Used
LLM Domain Inference	Built-in LLM	1 LLM call per 20 companies	Phase 0 of company search
Hunter Domain Search	Hunter.io	1 request per domain	Phase 1 of company search + enrichment fallback
Hunter Email Finder	Hunter.io	1 request per person	Enrichment fallback (when domain search doesn't match)
Hunter Email Verifier	Hunter.io	1 verification per email	Optional verification step
Apollo People Search	Apollo.io	Free (no credits)	Phase 2 of company search + enrichment search
Apollo People Enrichment	Apollo.io	1 credit per person	Enrichment step (to get verified emails)
AI Email Generation	Built-in LLM	1 LLM call per email	Email drafting
Email Sending	Resend	Per Resend pricing	Final send step

For your 378-company search: The LLM domain inference used approximately 19 LLM calls ($378 / 20 = 19$ batches). Companies with inferred domains used 1 Hunter request each. Companies without domains used 1 Apollo search each (free). Total Apollo credits consumed: 0 during search, then credits are consumed during enrichment.

11. End-to-End Flow Diagram

User uploads CSV/Excel

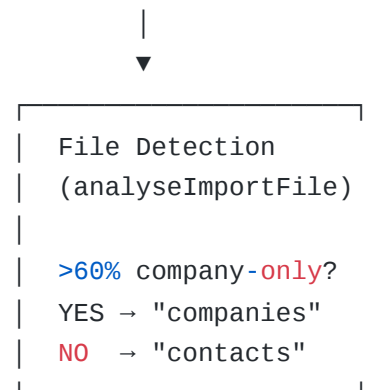

| Import & Score
| (0-100 composite)
| Tier assignment
| Personal email
| filter



| Waterfall
| Enrichment

| Step 1: Apollo
| (1 credit/person)

| Step 2: Hunter
| (fallback)

| Rescore after
| email found



| Project Matching
| (fuzzy company
| name match)
| +5 pts per match
| Rescore



| AI Email Gen
| (per contact)
| Role-aware
| Project-aware
| Collateral-aware



| Approval Queue
| Review → Approve
| or Reject



| Send via Resend |
| + PDF attachment |

12. Known Limitations & Recommendations

12.1 Current Limitations

Area	Limitation	Impact
Apollo Search	Returns obfuscated last names (e.g., “Co***s”)	Name matching during enrichment may miss some contacts
Apollo Enrichment	200 credits/day cap	Large campaigns (500+ contacts) take multiple days to fully enrich
Hunter Domain Search	Max 100 emails per domain	Very large companies may have contacts beyond the 100-email window
LLM Domain Inference	Relies on LLM knowledge, not live DNS	Some inferred domains may be outdated or incorrect (mitigated by confidence scoring)
Scoring	Blasting-centric weighting	The +20 blasting company bonus and +40 blasting specialist title score are hardcoded for the current product focus; campaigns for different products (e.g., DrillAir X1350 for drilling companies) don’t benefit from this bonus
Project Matching	Fuzzy string match on company name	May miss matches where the company name differs significantly from the project owner name
Email Sending	Single sender domain	All emails come from <code>ptatlascopcointel.com</code> ; no per-user sender domain support
Background Jobs	In-memory only	If the server restarts during a company search, the job is lost (30-min TTL)

12.2 Recommendations for Future Improvement

Short-term (high impact, low effort):

1. **Product-aware scoring:** Make the scoring weights configurable per campaign. A drilling campaign should give bonus points for drilling-related titles (drill manager, rig manager, drilling superintendent) instead of only blasting titles. This could be driven by the campaign's `targetSegment` field.
2. **Domain verification step:** After LLM domain inference, add a quick HTTP HEAD request to verify the domain actually resolves before sending it to Hunter. This would catch incorrect inferences early and save Hunter API credits.
3. **Deduplication on import:** Currently, if the same company appears in multiple searches or uploads, duplicate contacts can be imported. Add a dedup check on (firstName + lastName + company) before inserting.

Medium-term (significant impact):

1. **Persistent background jobs:** Move the company search job from in-memory to the database. This would survive server restarts and allow the user to close the browser and come back later.
2. **Auto-enrichment after search:** When the company search completes, automatically trigger waterfall enrichment on the found contacts instead of requiring a separate manual step.
3. **Enrichment progress UI:** Show a progress bar during waterfall enrichment (similar to the company search progress), so the user knows how many contacts have been enriched and how many are remaining.

Long-term (strategic):

1. **Multi-product campaign support:** Allow campaigns to target different Atlas Copco product lines with product-specific scoring, email templates, and collateral attachments.
 2. **Engagement tracking:** Track email opens, clicks, and replies to build a feedback loop that improves contact scoring and email generation over time.
 3. **CRM integration:** Export enriched contacts and campaign results to Salesforce or HubSpot for seamless handoff to the sales team.
-

13. Appendix: API Rate Limits

API	Rate Limit	Current Implementation
Hunter.io	15 req/s, 500 req/min	200ms delay (5 req/s)
Apollo.io	Varies by plan	300-500ms delay
Built-in LLM	Platform-managed	500ms between batches
Resend	100 emails/day (free), higher on paid plans	No explicit rate limiting

This document reflects the system state as of 12 April 2026. Code references are to the production codebase at `/home/ubuntu/atlas-copco-intelligence/server/`.