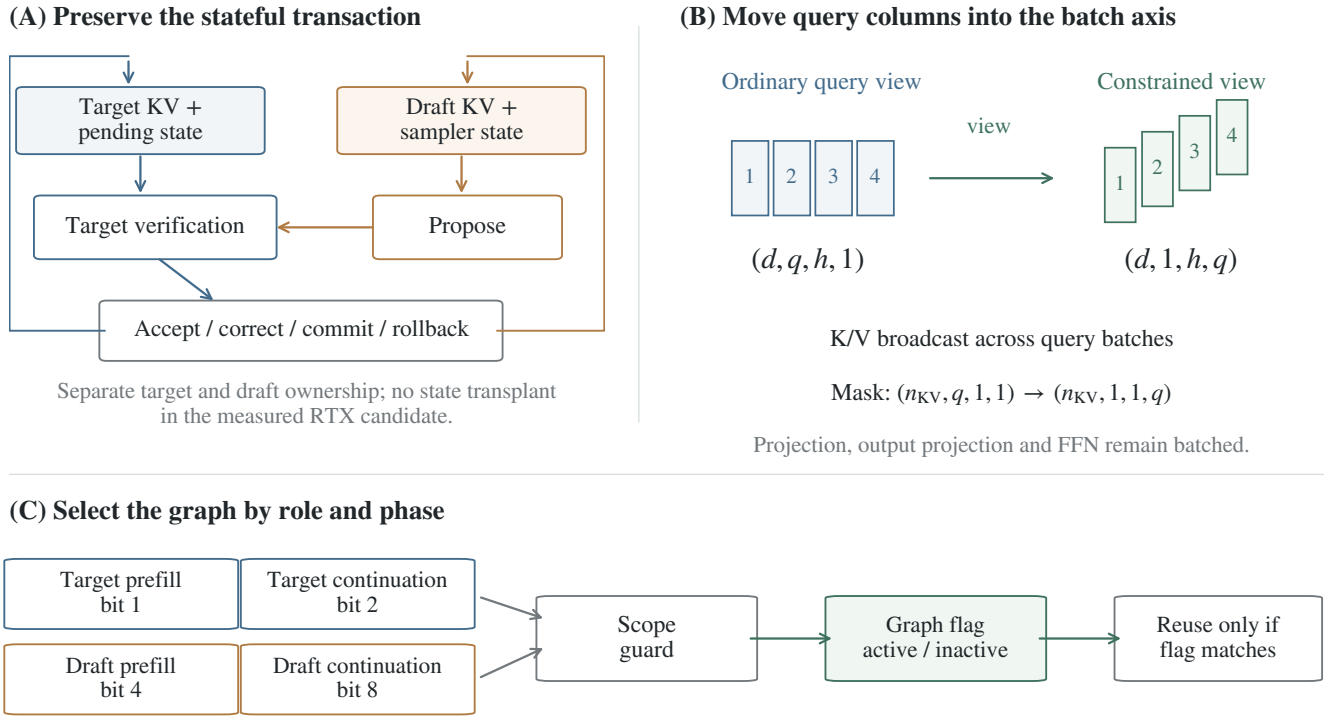
(A) Preserve the stateful transaction
Target KV + pending state
Draft KV + sampler state
Target verification
Propose
Accept / correct / commit / rollback
Separate target and draft ownership; no state transplant in the measured RTX candidate.
(B) Move query columns into the batch axis
Ordinary query view
Constrained view
view
1 2 3 4
1 2 3 4
$(d, q, h, 1)$
$(d, 1, h, q)$
K/V broadcast across query batches
Mask: $(n_{\mathrm{KV}}, q, 1, 1) \rightarrow (n_{\mathrm{KV}}, 1, 1, q)$
Projection, output projection and FFN remain batched.
(C) Select the graph by role and phase
Target prefill bit 1
Target continuation bit 2
Draft prefill bit 4
Draft continuation bit 8
Scope guard
Graph flag active / inactive
Reuse only if flag matches
Implemented scope: Qwen3, non-flash attention, one KV stream; see Section 5 for guards.