Phase bits control graph selection; R and M omit drafting

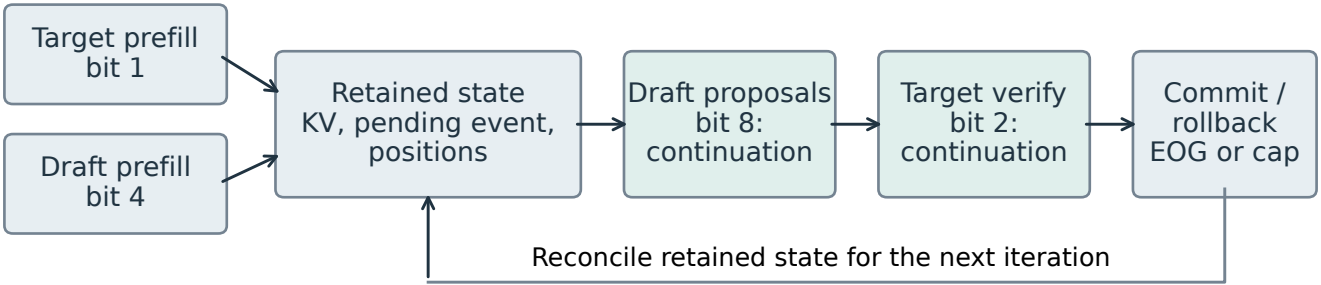

RTX constrained attention: query view (d, q, h, 1) → (d, 1, h, q)
K/V broadcast; mask columns match query batches
Projection, FFN and output remain batched