

Language-Guided Audio-Visual Source Separation via Trimodal Consistency

Reuben Tan¹ Arijit Ray¹ Andrea Burns¹ Bryan A. Plummer¹ Justin Salamon²
 Oriol Nieto² Bryan Russell² Kate Saenko^{1,3}

¹Boston University, ²Adobe Research, ³MIT-IBM Watson AI Lab, IBM Research

{rxtan, aburns4, array, bplum, saenko}@bu.edu, {salamon, onieto, brussell}@adobe.com

Abstract

We propose a **self-supervised approach** for learning to perform audio source separation in videos based on **natural language queries**, using only unlabeled video and audio pairs as training data. A **key challenge** in this task is learning to **associate the linguistic description of a sound-emitting object to its visual features** and the **corresponding components of the audio waveform**, all **without access to annotations during training**. To overcome this challenge, we adapt **off-the-shelf vision-language foundation models** to provide **pseudo-target supervision** via **two novel loss functions** and encourage a stronger **alignment** between the audio, visual and natural language modalities. During **inference**, our approach can **separate sounds given text, video and audio input, or given text and audio input alone**. We demonstrate the effectiveness of our self-supervised approach on three audio-visual separation datasets, including MUSIC, SOLOS and AudioSet, where we outperform state-of-the-art strongly supervised approaches despite not using object detectors or text labels during training. Our project page including publicly available code can be found at <https://cs-people.bu.edu/rxtan/projects/VAST>.

1. Introduction

Our everyday audiovisual world is composed of many **visible** sound sources, often with **multiple sources** layering on top of one another. For example, consider the video of the guitar and cello musicians playing together in Fig. 1. The two instruments have distinct timbres, and the musicians play non-unison, but complementary melodies. Despite hearing both instruments simultaneously, humans have an innate ability to identify and isolate the melody of a single source object. In this paper, we define the corresponding machine **task** as follows: given a natural language query that selects a sounding object, such as “person playing a guitar”, separate its sound source from the input audio waveform and localize it in the input video, without any supervision.

This task is challenging. First, there is no approach for

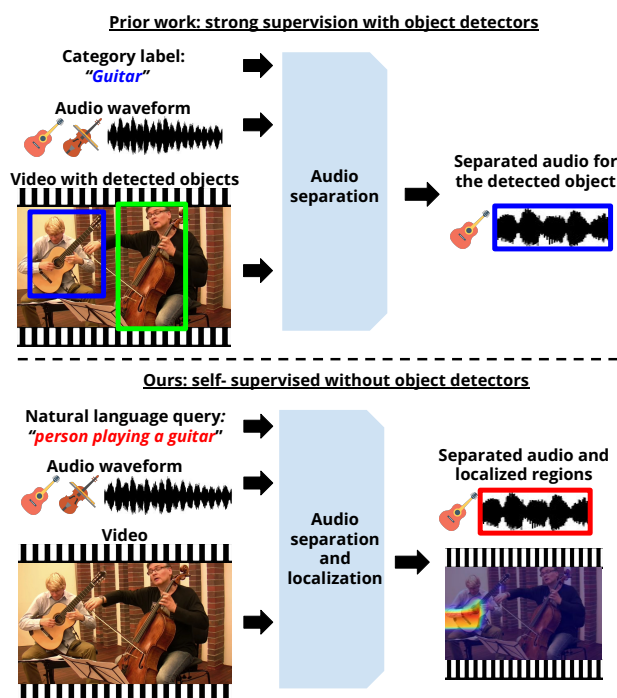


Figure 1. We propose to separate and localize audio sources based on a natural language query, by learning to align the modalities on completely unlabeled videos. In comparison, prior audio-visual sound separation approaches require object label supervision.

associating the linguistic description of a sound-emitting object to its visual features and the corresponding components of the audio waveform without access to annotations during training. **Existing audio-visual methods** [5, 14, 41] do not generalize to natural language queries **due to their dependence on discrete object class labels**. Second, an ideal solution would **jointly identify and localize sound-emitting objects** in videos as well as **separate the corresponding components in the audio waveform without strong supervision**. Although prior audio-visual work has demonstrated the **benefits of aligning relevant object regions in the video with their corresponding sounds** [5, 14], these approaches **require strong supervision** including object label

and bounding box annotations (see Fig. 1 top). Overcoming these challenges would enable important downstream applications including holistic video understanding [33], embodied AI [6], and bidirectional audio-to-video retrieval [38].

To address these challenges, we make the following contributions. First, we propose Video-Audio Separation through Text (VAST), a self-supervised approach that leverages large vision-language “foundation” models [20, 26] to provide pseudo-supervision for learning the alignment between the three modalities: audio, video and natural language. Our key insight is to learn a strong *transitive* relation from audio to natural language using vision as an *intermediary modality*, while preserving the alignment between the visual and natural language modalities embodied by the foundation models. However, just using the visual representations of these foundation models in existing AV separation approaches does not preserve the transitive relationships between the three modalities (Sec. 4.1).

Our second contribution introduces two novel multimodal alignment objectives that encourage the learnt audio representations to encode the semantics of captions and infer the latent transitive relation between the three modalities. While natural language can express a large and varied range of visual concepts for audio separation in videos, the absence of captions in unlabeled videos during training poses a significant challenge in our self-supervised formulation. To learn the transitive alignment, we adapt a foundation model to extract *latent captions* from unlabeled videos. Intuitively, the latent captions are representations that express the visual concepts present in the videos. Third, we introduce a Multiple Instance Learning formulation to learn to perform audio separation at the video region level since we do not have prior information on relevant objects or their locations in the videos during training.

Finally, we demonstrate the effectiveness of our proposed VAST approach through extensive evaluations on the audio source separation task on the SOLOS [24], MUSIC [41], and AudioSet [15] datasets. We show that our self-supervised approach outperforms strongly-supervised state-of-the-art approaches without using labels during training by leveraging the capability of vision-language foundation models. More importantly, we demonstrate that VAST learns to use language queries for audio separation despite not training with ground-truth language supervision.

2. Related Work

Audio-only source separation. The goal of audio-only source separation is to use the aural cues present in the input audio waveform to separate the individual components. Conventional audio signal processing techniques rely on strong assumptions such as the number of sources in the audio waveforms to compute non-negative matrix factorization [3, 10, 37] of audio spectrograms. Deep learn-

ing methods commonly adopt the self-supervised ‘mix-and-separate’ strategy where multiple audio sources are combined into a synthetic mixture and then predict a spectrogram mask to retrieve queried audio components [5, 14, 41].

Multimodal source separation. Recent work in audio-text [21, 22] and audio-visual [5, 7, 14, 40, 41] separation also use the ‘mix-and-separate’ strategy to train a decoder to predict a spectrogram mask based on natural language and video queries, respectively. In the case of the former, state-of-the-art approaches can either accept a single object label [5, 14, 41] or free-form natural language queries [21, 22]. Existing audio-visual source separation approaches often rely on training object detectors with strong supervision from bounding box annotations to localize objects of interest before learning to perform source separation at the object-level. In contrast, our proposed approach does not rely on pretrained object detectors or object labels in the training videos. The Sound of Pixels (SOP) model is the most similar in spirit to our proposed approach since it does not rely on object detectors. Instead, it learns to perform sound separation based on a video-level representation during training. Our VAST approach is also similar to the Voiceformer [28] approach which aims to separate speech from multiple speakers using a combination of audio, visual and language inputs. In contrast to our approach, their approach requires ground-truth text transcripts for training. Finally, the task is also similar in nature to that of sound localization in videos [9, 19].

Multimodal representation learning. One key challenge is grounding information from the text and/or audio modalities in the video frames [2, 5, 14, 35]. Since annotating video datasets is a costly process, prior work has investigated self-supervised pretraining methods on unlabeled videos [17, 36]. This often involves utilizing complementary information from the audio, text and visual modalities [39] to learn robust representations that can generalize to downstream tasks such as action recognition [1, 25, 32] and text-to-video retrieval [2, 23]. These approaches often use large-scale pretraining datasets such as Kinetics-400 / 600 [4] and HowTo100M [23] before finetuning linear probes for target tasks and datasets. Recent work has also focused on prompting multimodal foundation models such as CLIP [26] and ALIGN [20] to adapt them to new tasks ranging from open-vocabulary object detection [16] to domain adaptation [13] without modifying their parameters.

3. Video-Audio Separation through Text

Given a set of unlabeled videos and their audio tracks, we strive to learn a self-supervised model that separates an audio source given a natural language query and, optionally, an accompanying video. This goal requires a model to learn a strong alignment between the audio, vision, and language modalities. To this end, we propose a novel Audio-Visual

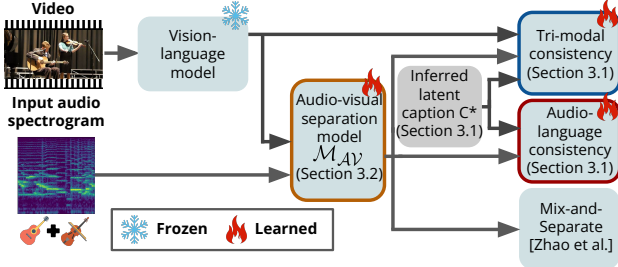


Figure 2. **Training overview of our proposed VAST approach.** We introduce tri-modal (Section 3.1) and audio-language (Section 3.1) consistency objectives to learn the latent alignment between the audio, video and language modalities. Furthermore, we adopt a prior mask prediction loss [41] (Section 3.2) to guide the training of our mask prediction decoder.

Separation through Text (VAST) approach that **learns an effective representation for audio-visual source separation**, as well as a **strong alignment between the audio and language modalities for audio-text source separation** (see Figure 2 for an overview). To learn this representation, we exploit the strong joint visual-semantic alignment embodied in **pre-trained vision-language foundation models** by encouraging our model to learn a **direct projection function for audio inputs into their joint embedding space** (Section 3.1). Our key insight is to use videos as an intermediary modality to learn a **transitive alignment between the audio and language modalities**. Since the **visual and language modalities are already aligned**, learning a strong correspondence between audio and vision should also provide an alignment between audio and language through videos via transitivity.

Despite the intuitiveness of this idea, our experiments will show that using the visual representations of existing audio-visual foundation models does not help them learn the above-mentioned transitive alignment. To address this **limitation**, we introduce our novel tri-modal and **audio-language consistency alignment objectives** (Figure 2). The tri-modal objective encourages the model to **maximize the semantic consistency between all three modalities by using videos as the intermediary modality** and the **audio-language objective helps to further improve the transitive alignment between audio and natural language**. We leverage vision-and-language foundation models to infer latent captions that correspond to the audio components without text annotations, thus providing **pseudo-language supervision** (Section 3.1). In addition, we adopt the **“mix-and-separate” strategy** [41] to train our audio separation model, where the **audio from multiple videos are mixed** and then **separated using only the video’s visual information**. For an input audio waveform A , we apply a Short-Time Fourier Transform (STFT) to obtain its **magnitude spectrogram A^S** and phase A^{phase} . Our learning objective only makes use of A^S , which encodes how the magnitude of the audio fre-

quencies changes over time. We reconstruct the predicted waveform by applying the **inverse STFT on the predicted spectrogram** using the original phase A^{phase} . We describe our VAST audio separation model \mathcal{M} in Section 3.2.

3.1. Alignment between audio, language and video

A **standard method** to learn a strong alignment between the audio, language and vision modalities is to **maximize the pairwise similarities of their input representations** using a contrastive learning formulation [1, 23]. However, **learning this alignment necessitates the presence of labels that indicate ground-truth correspondences** between these modalities. In our self-supervised setting, the **unlabeled videos only provide noisy labels** of audio-visual pairings but **do not contain text labels**. To circumvent this limitation, we propose to extract **latent captions**, which are **pseudo-words** that encode the visual concepts in videos with language semantics. Prior work [8, 11] has demonstrated that the rich visual-semantic alignment in vision-language foundation models can be adapted to extract latent word representations that convey the semantics of their conditioning images. Inspired by this insight, **we introduce the novel idea of using latent captions to identify sound-emitting object candidates in unlabeled videos for training**, thereby allowing us to **train without prior knowledge of existing objects in the videos**.

Latent captions. We perform “textual inversion” [8, 11, 12] where we adapt the CLIP language encoder to express the visual concepts of a video in the form of an encoded learnable parameter. Instead of introducing new concepts into the vocabulary of these models which require their parameters to be updated, we search for their latent language representations through a visual reconstruction objective. This **objective is based on the key insight that the final learnt latent captions should be expressive enough to convey the visual semantics of the video**. While it is also possible to use the visual frame representations as latent captions, we **reason that learning them as outputs of the language encoder will help a model generalize better to language queries during inference**. For a given video V , we encode its **center frame V_{center}** as: $f_{\text{center}}^V = g^V(V_{\text{center}})$, where g^V is the embedding function of the CLIP visual encoder. Then, we replace the token embeddings used for language queries with a learnable parameter p and encode it as: $g^L(p)$, where g^L is the embedding function of the CLIP language encoder. We **optimize the weights of p by maximizing the cosine similarity between f_{center}^V and $g^L(p)$** :

$$p^* \in \arg \max_p \text{sim}(f_{\text{center}}^V, g^L(p)) \quad (1)$$

where $\text{sim}(x, y) = x^T y / (\|x\| \|y\|)$ and $\|\cdot\|$ denotes the L_2 norm operator. Let $C^* = g^L(p^*)$ be the **latent caption**. We illustrate this operation in the supplemental. In theory, C^* is **analogous to a representation of a description of the frame and may replace ground-truth annotations effectively**.

Q. Why does language encoder generalize better?

Q. Latent caption's possible problems?
Not a GT?

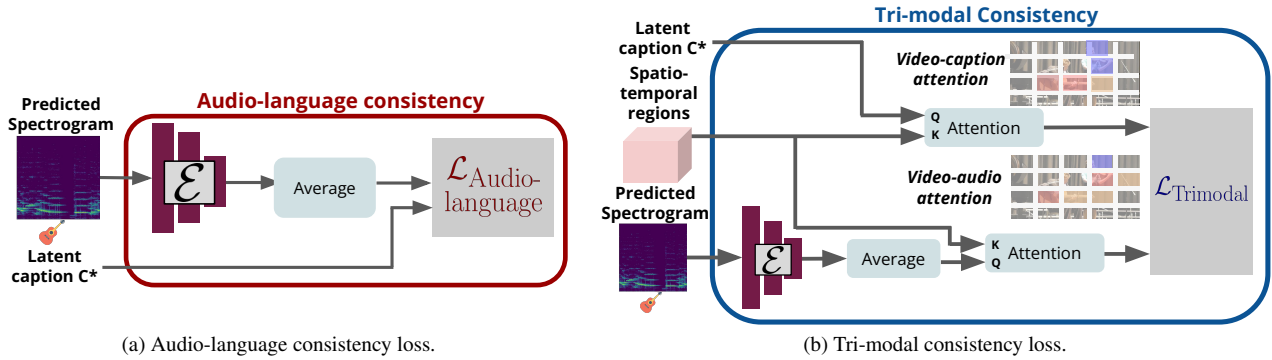


Figure 3. **Audio-language and tri-modal consistency alignment objectives.** (a) The audio-language objective aims to maximize the semantic similarity between the predicted audio and its latent caption. (b) In the tri-modal consistency objective, we compute normalized probability distributions over the spatiotemporal regions based on cosine similarity scores (colored frame patches) with respect to the predicted audio and latent captions. K and Q denote the key and query terminology that is used in self-attention. Intuitively, this objective encourages agreement between where the latent caption and predicted audio is occurring in the video.

Our audio-language and tri-modal consistency alignment objectives are based on our reasoning that well-separated audio sources should be semantically consistent with the visual concepts that guide their separation as well as their text labels. Given an input video V of T frames $V = \{V_1, \dots, V_T\}$ and an audio spectrogram $A^S \in \mathbb{R}^{F \times N}$ with F frequency bins and N STFT time frames, our model predicts a separated audio spectrogram $\hat{A}^S \in \mathbb{R}^{F \times N}$. We extract a latent representation for the predicted spectrogram: $\hat{f}^A = \mathcal{M}_\theta(\hat{A}^S) \in \mathbb{R}^D$ where \mathcal{M} denotes our audio separation model. For each video, we use its encoded predicted spectrogram and latent caption to provide pseudo-language supervision in our alignment objectives detailed below.

Audio-language consistency loss. To encourage our audio encoder to learn audio representations that are effective for separating sound components when conditioned on either text or video queries, we aim to maximize the pairwise similarities between all three modalities. The key insight is that the audio sources that are well-separated by the visual concepts in a video should have a strong semantic relevance to its latent caption which express the same concepts in natural language (Figure 3a). Theoretically, this is similar to the self-supervised multimodal learning objective of maximizing the similarity between the representations of an image and its corresponding caption as well as the dissimilarity of non-corresponding captions. In lieu of ground-truth object labels, we can maximize the alignment between the predicted audio representations and the latent captions over the entire vocabulary of captions \mathcal{X} :

$$\mathcal{L}_{\text{Audio-language}} = -\log \left(\frac{\exp(\hat{f}^A \cdot C^*/\tau)}{\sum_{x \in \mathcal{X}} \exp(\hat{f}^A \cdot x/\tau)} \right) \quad (2)$$

where τ is the temperature.

However, the problem of false negatives has been well-documented in image-text datasets, where captions for

some images may be relevant to other images but are treated erroneously as negatives. Since we are training on unlabeled videos, we account for the high likelihood that some videos may contain similar sounding objects by using a lower weight for this objective. Intuitively, this weighting helps to alleviate the effect of false negatives and prevent it from introducing a lot of noise during training.

Tri-modal consistency loss. While the audio-language consistency objective facilitates improving the alignment between audio sources and their corresponding latent captions, it does not provide a straightforward solution to disregard false negatives in its contrastive formulation. To address this issue, we further introduce a softer tri-modal alignment constraint which exploits the implicit localization capability of vision-language foundation models for supervision without requiring any negative samples. Specifically, we propose to use the intermediary visual modality to encourage well-separated audio components to be grounded correctly in the relevant spatiotemporal regions of a video. Prior work [29, 42] has demonstrated that the CLIP model can be engineered to extract a segmentation map based on natural language queries. Inspired by this finding, we use the latent captions to provide pseudo-target attention maps.

Our intuition is that enforcing a soft constraint on the predicted spectrograms such that they can be mapped to similar relevant regions as determined by the latent captions will encourage the model to implicitly learn the transitive alignment between the audio and language modalities. Let $P_{\text{Att}}(A, b) = \sigma(A \cdot b)$ to be the attention operation where $\sigma(z)_i = z_i / \sum_j z_j$ is the softmax function. For a given video V , we extract a set of spatiotemporal region representations by encoding each frame separately. Specifically, we encode the t -th frame as: $f_t^V = g_\theta^V(V_t)$, where $f_t^V \in \mathbb{R}^{HW \times D}$, where H and W are the downsampled height and width of the input video. Then, we compute a probability distribution of similarity scores over the set of

Q. What is this "weighting" exactly?

Q. What is this "soft constraint" exactly?

Q. False negative problem? unlabeled training helps << this is not a straightforward solution regarding false negative/ use the foundation model

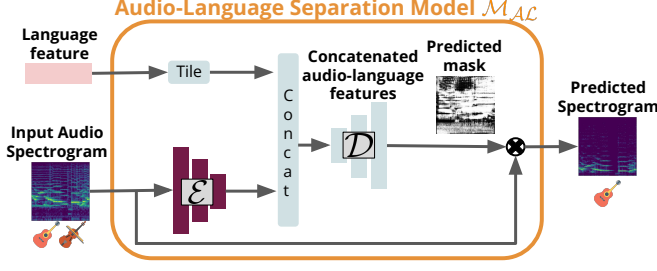


Figure 4. **Spectrogram mask prediction.** During inference, our model is able to separate audio sources using video or language queries despite training without ground-truth text annotations. We note that we only use unlabeled videos during training. We illustrate the audio-visual separation mode \mathcal{M}_{AV} in the supplemental.

spatial region features with respect to its latent caption C^* for the t -th frame: $P_{VC}^t = P_{Att}(f_t^V, C^*) \in \mathbb{R}^{HW \times 1}$. Next, we compute a similar distribution over the region features of the t -th frame with respect to the encoded audio representation of the **masked spectrogram**: $P_{VA}^t = P_{Att}(f_t^V, \hat{f}^A) \in \mathbb{R}^{HW \times 1}$. We encourage the predicted audio representation to be similar to that of the latent caption by **minimizing the Kullback-Leibler (KL) divergence between both attention distributions over the set of all time steps in a video \mathcal{T} :**

$$\mathcal{L}_{\text{Trimodal}} = \mathbb{E}_{t \sim \mathcal{T}} \left[\sum_{x=1}^{HW} P_{VC}^t(x) \log \frac{P_{VC}^t(x)}{P_{VA}^t(x)} \right], \quad (3)$$

where $P_{VA}^t(x)$ denotes the **audio-video attention distribution over the t -frame of the x -th spatial region.**

3.2. Audio Separation Model

We introduce two audio separation models \mathcal{M}_{AL} and \mathcal{M}_{AV} which **share the same audio model parameters for separating audio sources**. \mathcal{M}_{AL} (Figure 4) infers a spectrogram mask based on a language query while \mathcal{M}_{AV} (shown in supplemental) conditions its prediction on the input video. We adopt the **U-Net [31]** model as the audio component in \mathcal{M}_{AL} and \mathcal{M}_{AV} , which has been demonstrated by prior work [14, 41] to be effective at audio source separation, and the **CLIP visual and language encoders** to exploit its learnt visual-semantic alignment. **The U-Net model comprises an encoder \mathcal{E} and a decoder \mathcal{D} .** Given an input audio spectrogram A^S , the encoder \mathcal{E} applies a series of downsampling convolutional layers to output a set of bottleneck features: $f^A = \mathcal{E}(A^S)$, $f^A \in \mathbb{R}^{H^A \times W^A \times D}$, where H^A and W^A denote the height and width of the downsampled spectrogram, respectively.

Given a natural language query $L \in \mathbb{R}^{N_w}$ where N_w is the number of words, we extract its representation $f^L \in \mathbb{R}^{1 \times D}$ using the text encoder: $f^L = g^L(L)$. We stress that language queries with ground-truth object labels are only used during inference. Then, we tile the language representation by the factor $H^A W^A$ and concatenate with the

audio bottleneck representations along the channel dimension: $f^{AL} = \text{concat}(f^A, \text{tile}(f^L))$, where f^{AL} has the dimensions $\mathbb{R}^{H^A \times W^A \times 2D}$. We pass the concatenated representations into the decoder \mathcal{D} consisting of a series of up-sampling convolutional layers to generate a real-valued ratio mask: $\hat{M} = \mathcal{D}(f^{AL}) \in \mathbb{R}^{F \times N}$. To predict the separated audio source, each element of the mask is multiplied with the corresponding location in the input spectrogram: $\hat{A}^S = \hat{M} \odot A^S$, where \odot denotes the Hadamard product.

Video and Multiple Instance Learning for mask prediction. Since language annotations are not used during training, we train only with unlabeled videos. During training, as well as inference on audio-visual separation, we use the CLIP visual encoder to extract a set of language-grounded spatiotemporal region representations $f^V \in \mathbb{R}^{T \times H \times W \times D}$. Similarly, we can perform the same mask inference operation using videos by using the representation of each spatiotemporal region representation interchangeably in place of the language representation. This interchangeability is due to the fact that the CLIP representations project the video to the joint vision-language embedding space.

Prior work [14] has demonstrated the advantages of performing audio-visual separation at the object level for videos with multiple objects. In the absence of object detectors and labels, we propose an MIL formulation, where all spatiotemporal regions in the input video are treated as positive candidates. Specifically, given a spatiotemporal grid of region representations extracted from the visual encoder as defined in this section, we predict a spectrogram mask \hat{M}_j for the j -th region. Finally, we aggregate them over all regions to obtain a spectrogram mask for the entire video:

$$\hat{M} = \frac{1}{T} \sum_{j=1}^{THW} \hat{M}_j. \quad (4)$$

Intuitively, this formulation encourages the model to learn to identify the salient regions with sounding objects for audio separation. We obtain the predicted mask for each frame by computing the sum of the predicted masks over all spatial regions and average the predicted masks over the temporal dimension since we reason that a sounding object should have similar prediction masks across frames. We adopt the self-supervised ‘mix-and-separate’ learning objective [14, 41] to train our model for predicting spectrogram masks. In this formulation, audio from two or more videos are mixed and the goal is to use the visual information of a video to separate its audio component. This setting allows us to generate pseudo-target masks for training supervision. We compute $\mathcal{L}_{\text{mask}}$ as the L1 loss between the pseudo-target and predicted ratio masks [41]. Please refer to the supplemental for details of our spatiotemporal region representation, audio-visual separation model and $\mathcal{L}_{\text{mask}}$. The final objective function is computed as:

$$\mathcal{L} = \lambda_1 \mathcal{L}_{\text{mask}} + \lambda_2 \mathcal{L}_{\text{Trimodal}} + \lambda_3 \mathcal{L}_{\text{Audio-language}} \quad (5)$$

Q.
Unet ?
already
reviewe
d for
DDPM
project

Method	Object detectors	# Region proposals	Solos			Duets		
			NSDR \uparrow	SIR \uparrow	SAR \uparrow	NSDR \uparrow	SIR \uparrow	SAR \uparrow
Co-Separation [14]	Yes	2	7.38	13.70	10.82	7.42	13.81	10.60
AVSGS [5]	Yes	42	9.04	14.45	12.24	10.25	15.60	12.82
Sound-of-Pixels [41]	No	None	7.30	11.90	11.90	6.05	9.81	10.61
AV-Mix-and-Separate [14]	No	None	3.16	6.74	8.89	3.23	7.01	9.14
NMF-MFCC [34]	No	None	0.92	5.68	6.84	0.92	5.68	6.84
VAST (Ours)	No	None	7.98	13.92	12.35	8.08	13.97	11.33

Table 1. **Audio-visual source separation on MUSIC.** We report results on videos that contain one instrument (solos) and two instruments (duets). Despite not training with object bounding boxes, VAST performs competitively with state-of-the-art detection-based approaches.

where λ_1 , λ_2 and λ_3 denote the weights for the mask, tri-modal and audio-language consistency losses, respectively.

4. Experiments

We evaluate the effectiveness of our proposed VAST approach on audio-text and audio-visual source separation in videos. To perform fair comparison to prior work, we conduct experiments on the SOLOS [24], MUSIC [41] and AudioSet [15] datasets. We refer readers to the supplemental for additional implementation and dataset details. Given a language query containing a prompt template and an object, the goal of **audio-text source separation** is to extract its corresponding sound component from an audio input, which is often comprised of a mixture of sounds emitted by various objects. Similarly, in **audio-visual source separation**, a model has to leverage the visual information in the input video to extract its corresponding sound component and align it with the relevant video pixels.

Evaluation metrics. We adopt the Normalized Signal-to-Distortion Ratio (NSDR), Signal-to-Interference Ratio (SIR) and Signal-to-Artifact Ratio (SAR) [27, 30]. NSDR computes the difference between the SDR of the predicted and mixed audio with respect to the ground-truth waveforms, which measures the sound quality of the separated audios. SIR measures the amount of contamination from other audio sources in the predicted audio. Finally, SAR measures the amount of artifacts in the predicted audio.

4.1. Quantitative results

We compare our approach to the following baselines. Similar to our approach, **Sound of Pixels (SOP)** [41] does not require object detectors but learns to perform video-level separation. We also implement the **AV-Mix-and-separate** baseline from [14] with the same audio-visual separation model as ours but is trained to perform video-level separation and without our alignment objectives. The off-the-shelf **NMF-MFCC** [34] baseline performs audio separation using non-negative matrix factorization (NMF) and Mel frequency cepstrum coefficients (MFCC). Next, we also compare to **Co-Separation** [14] that learns to perform audio separation at the object-level by relying on object de-

tectors. Last but not least, we include **AVSGS** [5] that also relies on a high number of object proposals to construct a spatiotemporal scene graph to reason about context.

Audio-visual source separation on MUSIC. We report the results of our evaluation under two settings in Table 1. In the first setting, each video contains only a single instrument while the ‘duet’ setting includes videos that contain two different instruments. To begin, our VAST approach outperforms SOP by a large margin despite not relying on object detectors too. As shown in Table 4, we show that this performance gain is not due to just replacing ImageNet-pretrained Resnet18 [18] visual representations with those of the CLIP model since it leads to a large drop in performance. We hypothesize that SOP does not learn a direct projection of the audio inputs used in source separation into the CLIP embedding space. In contrast, VAST facilitates a better adaptation of the learnt audio representations to the CLIP embedding. We also found it important to modify CLIP’s self-attention (see supp.). We observe that VAST outperforms AV-Mix-and-Separate by significantly, particularly under the duet setting. This suggests that performing region-level audio separation provides more capacity for the model to reason about multiple sounding objects in videos.

More significantly, we observe that our approach outperforms the Co-Separation approach [14], which relies on object labels in the videos. Since Co-Separation uses a high confidence region proposal for each instrument to localize relevant regions, our improvements over it suggest that our latent captions are able to express multiple visual concepts that are present in the video. Last but not least, our approach is also comparable to AVSGS even without scene graph reasoning modules. The latter constructs a spatiotemporal visual scene graph over a large number of region proposals to reason about context between detected objects. We note that their audio-visual scene graph component can be combined with our VAST approach to possibly improve performance but is beyond the scope of this work.

Audio-visual source separation on SOLOS. While the videos in the SOLOS dataset generally have less background noise than those of the MUSIC dataset, we see in Table 2 that AV-Mix-and-Separate and NMF-MFCC are still

Method	Object detectors	NSDR \uparrow	SIR \uparrow	SAR \uparrow
Co-Separation [14]	Yes	7.11	12.09	10.05
AVSGS [5]	Yes	9.20	14.05	12.17
Sound-of-Pixels [41]	No	6.28	10.84	10.13
AV-Mix-and-Sep [14]	No	2.94	5.81	8.33
NMF-MFCC [34]	No	0.68	4.75	5.12
VAST (Ours)	No	8.58	14.16	12.35

Table 2. **Audio-visual source separation results on the SOLOS dataset.** Similar to the results in Table 1, we see that VAST significantly closes the gap with object detection-based approaches.

Method	Object detectors	NSDR \uparrow	SIR \uparrow	SAR \uparrow
Co-Separation [14]	Yes	4.26	7.07	13.00
AVSGS [5]	Yes	5.28	8.27	13.04
Sound-of-Pixels [41]	No	1.66	3.58	11.50
AV-Mix-and-Sep [14]	No	1.68	3.30	12.20
NMF-MFCC [34]	No	0.25	4.19	5.78
VAST (Ours)	No	4.15	7.62	13.20

Table 3. **Audio-visual source separation results on AudioSet.** VAST generalizes much better to the noisier AudioSet dataset than Sound-of-Pixels which also does not use object detections.

Model	Visual encoder	NSDR \uparrow	SIR \uparrow	SAR \uparrow
SOP [41]	ImageNet	6.28	10.84	10.13
SOP [41]	CLIP	4.42	8.36	8.21
Ours	CLIP	8.58	14.16	12.35

Table 4. **Using CLIP visual features in SOP model on the SOLOS dataset.** Using CLIP visual features naively in existing methods results in a drop in performance.

unable to generalize to the cleaner audio signals. Similar to the reported performance on the MUSIC dataset, we also observe that VAST is comparable to the strongly supervised AVSGS approach on the SOLOS dataset. One possible reason behind the lower performance of AVSGS on videos with single instrument is that it is less critical to reason about context for videos with a single sounding object. Our better performance as compared to Co-Separation suggests that learning to perform audio separation at the coarse video region level under an MIL formulation can serve as an effective replacement for training object detectors. These results also indicate the great promise of latent captions in replacing ground-truth object annotations for supervision.

Audio-visual source separation on AudioSet. Finally, we report the results of our evaluation on the AudioSet dataset in Table 3. AudioSet has been documented by prior work [14] to be much noisier than the videos in the other two datasets, which explains the lower performance across all approaches. Unlike the SOP model, we observe that our

$\mathcal{L}_{\text{Audio-language}}$	$\mathcal{L}_{\text{Trimodal}}$	NSDR \uparrow	SIR \uparrow	SAR \uparrow
\times	\times	5.47	10.55	10.95
\checkmark	\times	8.08	13.74	12.18
\times	\checkmark	8.10	13.84	11.79
\checkmark	\checkmark	8.58	14.16	12.35

Table 5. **Ablation of our audio-language and tri-modal consistency alignment objectives on SOLOS.** The alignment objectives help to improve audio-visual separation performance.

# tokens	NSDR \uparrow	SIR \uparrow	SAR \uparrow
1	7.31	11.34	11.71
2	7.67	13.07	11.45
3	8.58	14.16	12.35
4	8.02	13.39	11.53

Table 6. **Ablation over number of learnable tokens on SOLOS.** Using more learnable tokens generally improves performance.

training approach is more robust to noise in the dataset where the sounding object may not always be visible.

4.1.1 Model Analysis

Ablation of $\mathcal{L}_{\text{Trimodal}}$ and $\mathcal{L}_{\text{Audio-language}}$. Table 5 provides an ablation over our audio-language and tri-modal consistency losses. Despite being trained on a larger and more diverse set of visual concepts, we find the CLIP visual representations alone do not encourage the audio encoder to learn a strong alignment between the audio and vision modalities (row 1). We observe the importance of our proposed alignment objectives where adding one or the other leads to a significant improvement in audio separation performance. Due to multiple training videos containing similar instruments, it is likely that we are treating some latent captions as false negative samples for each video in the audio-language consistency objective. However, we see that the consistency objective is still beneficial towards audio separation.

Number of learnable token embeddings in latent captions. We report the results of our ablation over the number of learnable token parameters used in the extraction of latent captions in Table 6. We observe that increasing the number of learnable tokens generally helps to improve the performance, although using 4 tokens hurts performance slightly. We hypothesize that a higher number of learnable tokens provide more capacity for the CLIP language model to express multiple visual concepts that are present in the videos. This finding suggests that using more tokens may be beneficial for videos with more complex visual scenes.

4.2. Audio-language source separation

Finally, we evaluate the capability of our trained model to separate audio components based on natural language queries in Table 7. We construct each query using the template ‘person playing a {instrument}’. We stress that we

Query Modality	Alignment objectives	SOLOS			MUSIC			Audioset		
		NSDR \uparrow	SIR \uparrow	SAR \uparrow	NSDR \uparrow	SIR \uparrow	SAR \uparrow	NSDR \uparrow	SIR \uparrow	SAR \uparrow
Language	No	-3.05	2.79	3.77	-3.67	2.51	3.41	-5.02	1.98	14.94
Language	Yes	6.92	12.07	10.41	6.45	11.18	10.77	2.36	4.71	10.28

Table 7. **Audio-text separation with natural language queries.** We evaluate our model, that is trained only on unlabeled videos, on the task of audio-text separation. Note that we do not compare to other audio-visual separation baselines since there is no straightforward way to adapt them for language queries. We compare our full VAST model to a variant that is only trained with the mask prediction loss.

only train on unlabeled videos without text supervision. To begin, we compare our VAST model to a variant that is trained without our alignment objectives. Note that we do not compare to other audio-visual approaches since there is no straightforward way to adapt them for language queries. As evidenced by the significant performance gap between both variants, our alignment losses are integral to learning a strong transitive alignment between the audio and language modalities. This finding suggests that just learning an alignment between the audio and visual modalities does not result in a *transitive* relationship between the audio and natural language modalities.

Additionally, for effective sound source separation given either video or text inputs, we hypothesize that it is critical to learn an audio encoder E that is well-aligned with CLIP’s vision-language embedding. Note that the same shared audio encoder E encodes both mixed and predicted audio sources. Thus, it can also be used as a general audio encoder and the decoder D can condition its separation process on either language or video queries. Lastly, we observe that our alignment objectives are still insufficient for closing the performance gap between audio-text and audio-visual separation (Tables 1, 2 and 3) completely. This observation indicates that future work is needed for further improving the latent alignment between all three modalities.

4.3. Qualitative results

Predicted audio-to-video attention visualizations. To evaluate the semantic consistency between the predicted audio sources and the visual cues that guide the separation process, we plot the attention map between the encoded predicted spectrograms and their corresponding video frames (Section 3.1) in Figure 5. We observe that VAST helps the model to learn to ground the audio source in the video pixels despite not requiring bounding box supervision.

Predicted outputs of language-based audio separation. Finally, we present an example of how different language queries affect the separation performance for the same audio input in Figure 6. Significantly, despite not relying on text annotations for training supervision, our model can separate audio components based on free-form language queries. This demonstrates the effectiveness of our proposed idea to substitute ground-truth text annotations with *latent captions* during training. Additionally, we also observe that providing more context in the language query (e.g., “violin” versus



Figure 5. **Predicted audio attention in videos.** Our consistency objectives help the model to localize the relevant regions more accurately without prior knowledge of sounding object locations.

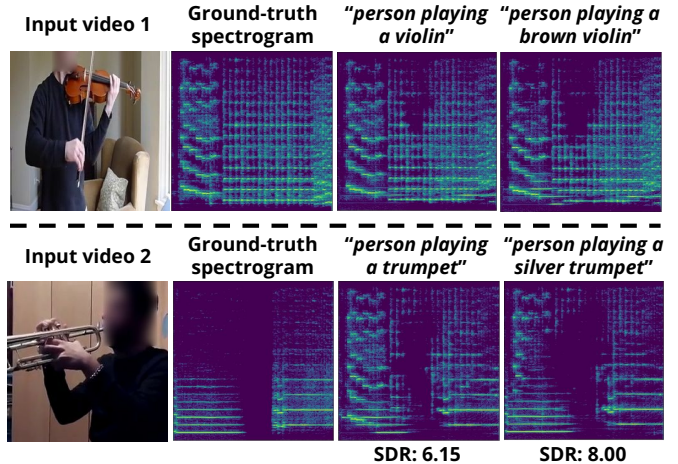


Figure 6. **Predicted audio spectrograms with language queries.** Interestingly, we see that including visually grounded adjectives in the queries affects the quality of the separated audio sources.

“person playing a violin”) can lead to improved separations.

5. Conclusion

In summary, we introduce a self-supervised approach for learning to separate audio based on a language query, or a video. In the absence of object labels, we propose to extract latent captions to provide pseudo-language supervision. Furthermore, we introduce the novel tri-modal and audio-language alignment objectives that use the latent captions to improve the alignment of the audio, language and video modalities. By reducing the training need for object labels, our work opens up the possibility of large-scale pre-training on unlabeled videos with diverse visual concepts.

Acknowledgements: This material is based upon work supported, in part, by DARPA under agreement number HR00112020054 and a gift from Adobe Research.

References

- [1] Hassan Akbari, Liangzhe Yuan, Rui Qian, Wei-Hong Chuang, Shih-Fu Chang, Yin Cui, and Boqing Gong. Vatt: Transformers for multimodal self-supervised learning from raw video, audio and text. *Advances in Neural Information Processing Systems*, 34:24206–24221, 2021. 2, 3
- [2] Lisa Anne Hendricks, Oliver Wang, Eli Shechtman, Josef Sivic, Trevor Darrell, and Bryan Russell. Localizing moments in video with natural language. In *Proceedings of the IEEE international conference on computer vision*, pages 5803–5812, 2017. 2
- [3] Francisco Jesus Canadas-Quesada, Pedro Vera-Candeas, Nicolas Ruiz-Reyes, Julio Carabias-Orti, and Pablo Cabanas-Molero. Percussive/harmonic sound separation by non-negative matrix factorization with smoothness/sparseness constraints. *EURASIP Journal on Audio, Speech, and Music Processing*, 2014(1):1–17, 2014. 2
- [4] Joao Carreira, Eric Noland, Andras Banki-Horvath, Chloe Hillier, and Andrew Zisserman. A short note about kinetics-600. *arXiv preprint arXiv:1808.01340*, 2018. 2
- [5] Moitrey Chatterjee, Jonathan Le Roux, Narendra Ahuja, and Anoop Cherian. Visual scene graphs for audio source separation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1204–1213, 2021. 1, 2, 6, 7
- [6] Changan Chen, Unnat Jain, Carl Schissler, Sebastia Vicens Amengual Gari, Ziad Al-Halah, Vamsi Krishna Ithapu, Philip Robinson, and Kristen Grauman. Audio-visual embodied navigation. *environment*, 97:103, 2019. 2
- [7] Sanjoy Chowdhury, Subhrajyoti Dasgupta, Sudip Das, and Ujjwal Bhattacharya. Listen to the pixels. In *2021 IEEE International Conference on Image Processing (ICIP)*, pages 2568–2572. IEEE, 2021. 2
- [8] Niv Cohen, Rinon Gal, Eli A Meir, Gal Chechik, and Yuval Atzmon. "this is my unicorn, fluffy": Personalizing frozen vision-language representations. *arXiv preprint arXiv:2204.01694*, 2022. 3
- [9] Fan Feng, Yue Ming, and Nannan Hu. Sslnet: A network for cross-modal sound source localization in visual scenes. *Neurocomputing*, 500:1052–1062, 2022. 2
- [10] Derry Fitzgerald, Matt Cranitch, and Eugene Coyle. Shifted non-negative matrix factorisation for sound source separation. In *IEEE/SP 13th Workshop on Statistical Signal Processing, 2005*, pages 1132–1137. IEEE, 2005. 2
- [11] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022. 3
- [12] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H. Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion, 2022. 3
- [13] Rinon Gal, Or Patashnik, Haggai Maron, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. Stylegan-nada: Clip-guided domain adaptation of image generators. *ACM Transactions on Graphics (TOG)*, 41(4):1–13, 2022. 2
- [14] Ruohan Gao and Kristen Grauman. Co-separating sounds of visual objects. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3879–3888, 2019. 1, 2, 5, 6, 7
- [15] Jort F Gemmeke, Daniel PW Ellis, Dylan Freedman, Aren Jansen, Wade Lawrence, R Channing Moore, Manoj Plakal, and Marvin Ritter. Audio set: An ontology and human-labeled dataset for audio events. In *2017 IEEE international conference on acoustics, speech and signal processing (ICASSP)*, pages 776–780. IEEE, 2017. 2, 6
- [16] Xiuye Gu, Tsung-Yi Lin, Weicheng Kuo, and Yin Cui. Open-vocabulary object detection via vision and language knowledge distillation. *arXiv preprint arXiv:2104.13921*, 2021. 2
- [17] Tengda Han, Weidi Xie, and Andrew Zisserman. Memory-augmented dense predictive coding for video representation learning. In *European conference on computer vision*, pages 312–329. Springer, 2020. 2
- [18] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016. 6
- [19] Xixi Hu, Ziyang Chen, and Andrew Owens. Mix and localize: Localizing sound sources in mixtures. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10483–10492, 2022. 2
- [20] Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *International Conference on Machine Learning*, pages 4904–4916. PMLR, 2021. 2
- [21] Kevin Kilgour, Beat Gfeller, Qingqing Huang, Aren Jansen, Scott Wisdom, and Marco Tagliasacchi. Text-driven separation of arbitrary sounds. *arXiv preprint arXiv:2204.05738*, 2022. 2
- [22] Chris Dongjoo Kim, Byeongchang Kim, Hyunmin Lee, and Gunhee Kim. Audiocaps: Generating captions for audios in the wild. In *NAACL-HLT*, 2019. 2
- [23] Antoine Miech, Dimitri Zhukov, Jean-Baptiste Alayrac, Makarand Tapaswi, Ivan Laptev, and Josef Sivic. Howto100m: Learning a text-video embedding by watching hundred million narrated video clips. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2630–2640, 2019. 2, 3
- [24] Juan F. Montesinos, Olga Slizovskaia, and Gloria Haro. Solos: A dataset for audio-visual music analysis. In *22st IEEE International Workshop on Multimedia Signal Processing, MMSP 2020, Tampere, Finland, September 21-24, 2020*. IEEE, 2020. 2, 6
- [25] AJ Piergiovanni, Anelia Angelova, and Michael S Ryoo. Evolving losses for unsupervised video representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 133–142, 2020. 2
- [26] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry,

- Amanda Askeel, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021. 2
- [27] Colin Raffel, Brian McFee, Eric J Humphrey, Justin Salamon, Oriol Nieto, Dawen Liang, Daniel PW Ellis, and C Colin Raffel. mir_eval: A transparent implementation of common mir metrics. In *Proceedings of the 15th International Society for Music Information Retrieval Conference, ISMIR*. Citeseer, 2014. 6
- [28] Akam Rahimi, Triantafyllos Afouras, and Andrew Zisserman. Reading to listen at the cocktail party: Multi-modal speech separation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10493–10502, 2022. 2
- [29] Yongming Rao, Wenliang Zhao, Guangyi Chen, Yansong Tang, Zheng Zhu, Guan Huang, Jie Zhou, and Jiwen Lu. Denseclip: Language-guided dense prediction with context-aware prompting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18082–18091, 2022. 4
- [30] Antony W Rix, John G Beerends, Michael P Hollier, and Andries P Hekstra. Perceptual evaluation of speech quality (pesq)-a new method for speech quality assessment of telephone networks and codecs. In *2001 IEEE international conference on acoustics, speech, and signal processing. Proceedings (Cat. No. 01CH37221)*, volume 2, pages 749–752. IEEE, 2001. 6
- [31] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-net: Convolutional networks for biomedical image segmentation. In *International Conference on Medical image computing and computer-assisted intervention*, pages 234–241. Springer, 2015. 5
- [32] Andrew Rouditchenko, Angie Boggust, David Harwath, Brian Chen, Dhiraj Joshi, Samuel Thomas, Kartik Audhkhasi, Hilde Kuehne, Rameswar Panda, Rogerio Feris, et al. Avlnet: Learning audio-visual language representations from instructional videos. *arXiv preprint arXiv:2006.09199*, 2020. 2
- [33] Paul Hongsuck Seo, Arsha Nagrani, Anurag Arnab, and Cordelia Schmid. End-to-end generative pretraining for multimodal video captioning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 17959–17968, 2022. 2
- [34] Martin Spiertz and Volker Gnann. Source-filter based clustering for monaural blind source separation. In *Proceedings of the 12th International Conference on Digital Audio Effects*, volume 4, 2009. 6, 7
- [35] Reuben Tan, Bryan Plummer, Kate Saenko, Hailin Jin, and Bryan Russell. Look at what i’m doing: Self-supervised spatial grounding of narrations in instructional videos. *Advances in Neural Information Processing Systems*, 34:14476–14487, 2021. 2
- [36] Zhan Tong, Yibing Song, Jue Wang, and Limin Wang. Videomae: Masked autoencoders are data-efficient learners for self-supervised video pre-training. *arXiv preprint arXiv:2203.12602*, 2022. 2
- [37] Beiming Wang and Mark D Plumbley. Musical audio stream separation by non-negative matrix factorization. In *Proc. DMRN summer conf*, pages 23–24, 2005. 2
- [38] Ho-Hsiang Wu, Prem Seetharaman, Kundan Kumar, and Juan Pablo Bello. Wav2clip: Learning robust audio representations from clip. In *ICASSP 2022 - 2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 2022. 2
- [39] Rowan Zellers, Jiasen Lu, Ximing Lu, Youngjae Yu, Yanpeng Zhao, Mohammadreza Salehi, Aditya Kusupati, Jack Hessel, Ali Farhadi, and Yejin Choi. Merlot reserve: Neural script knowledge through vision and language and sound. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16375–16387, 2022. 2
- [40] Hang Zhao, Chuang Gan, Wei-Chiu Ma, and Antonio Torralba. The sound of motions. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 1735–1744, 2019. 2
- [41] Hang Zhao, Chuang Gan, Andrew Rouditchenko, Carl Vondrick, Josh McDermott, and Antonio Torralba. The sound of pixels. In *Proceedings of the European conference on computer vision (ECCV)*, pages 570–586, 2018. 1, 2, 3, 5, 6, 7
- [42] Chong Zhou, Chen Change Loy, and Bo Dai. Denseclip: Extract free dense labels from clip. *arXiv preprint arXiv:2112.01071*, 2021. 4