

Hierarchical memory orchestration in AI inference exhibits intrinsic regime-dependent limits

Geunsik Lim ^{1*}

¹ College of Information and Communication Engineering,
Sungkyunkwan University (SKKU), Suwon, South Korea .

Corresponding author(s). E-mail(s): leemgs@g.skku.edu;

Abstract

As AI models outgrow fast memory, large-scale inference is limited not by computation but by how intelligent systems coordinate data across a hierarchical memory system. Here we show that this coordination is not continuously optimisable but is governed by intrinsic, regime-dependent limits. Characterising any inference system by two dimensionless ratios, fast-memory residency (R_C) and transfer pressure (R_B), we identify three operational regimes—capacity-limited, coordination-dominated, and I/O-limited—separated by abrupt, phase-like transitions. Across these boundaries the ranking of optimisation strategies inverts: a method that lowers latency by 24% in one regime raises it by 8–12% in another. We derive structural lower bounds proving the transitions are inevitable, calibrate the boundaries across five hardware platforms, and confirm the principle on language, vision, and retrieval-augmented workloads. These results establish regime-dependent behaviour as a general principle of memory-bound machine intelligence, reframing AI-inference scaling from continuous tuning to regime-aware design.

Keywords: machine intelligence at scale, AI inference, memory-bound computation, regime transitions, phase-like behaviour, large language models, hierarchical memory systems

The intelligence of modern foundation models is increasingly delivered not at training time but at *inference* time, where a trained model is repeatedly queried to reason, generate, and act. As these models scale beyond the fast memory of a single accelerator, the performance of large-scale inference is governed less by arithmetic and more by how an intelligent system *coordinates data movement* across a hierarchical memory system

spanning device memory, host memory, and secondary storage [1, 2]. Understanding the limits of this coordination is therefore central to understanding how machine intelligence behaves—and how it can be deployed—at scale.

This shift carries pressing economic and environmental stakes. Once a model is trained, the recurring cost of *serving* it dominates its lifetime resource footprint, and hardware analyses identify memory capacity, bandwidth, and interconnect latency—not arithmetic throughput—as the binding constraints of inference [3]. The energy penalty of misaligned coordination is substantial: operating in the I/O-limited regime reduces throughput-per-Watt by more than $3\times$ relative to coordination-aligned operation, raising CO₂ output from 15.8 g to 42.5 g per 10⁶ tokens at the IEA (2024) global carbon intensity [4]. Characterising the *intrinsic limits* of memory coordination is thus a prerequisite for the viability of inference-driven AI.

Existing systems reduce memory pressure via CPU/NVMe offloading [5, 6], GPU–CPU swapping [7], KV-cache management [8], and iteration-level request scheduling in serving engines [9]. These techniques deliver substantial gains in some configurations yet show diminishing returns—or even performance inversion—in others. Prior work explains this heterogeneity through workload-specific factors (model size, batch size, hardware topology), without a unifying account that predicts *when* and *why* coordination fails. This raises a question that is fundamental to how we reason about deploying intelligent systems: *Is hierarchical memory coordination a continuously optimisable problem, or does machine intelligence at scale admit intrinsic boundaries beyond which additional coordination cannot improve—and can worsen—end-to-end performance?*

We answer this question with a regime-based view. Denning’s working-set model and thrashing theory [10] identify capacity saturation as a binary event on a *single-tier* system, and the Roofline model [11] expresses performance as $\min(F \cdot I, B_{\text{peak}})$ for a fixed workload on a single tier. Neither framework addresses a *multi-tier* hierarchy in which computation, locality, cross-tier transfer, and synchronisation co-exist as distinct, adjustable latency terms—the setting in which large-scale intelligent inference actually runs. Our framework—extending Little’s Law [12] to multi-tier inference—decomposes end-to-end latency into four co-active terms ($T_{\text{comp}} + T_{\text{mem}} + T_{\text{swap}} + T_{\text{sync}}$) and characterises how their relative magnitudes shift as two dimensionless ratios change, determining *which* intervention is effective at any operating point. Multi-tier inference systems exhibit three operational regimes governed by the fast-memory residency ratio $R_C = C_{\text{fast}}/W$ and the transfer-pressure ratio $R_B = B_{\text{slow}} \cdot \Delta t/D$. Transitions between regimes are abrupt: modest changes in model size, batch size, or bandwidth shift the dominant latency contributor discontinuously, in a phase-like manner. Regime-agnostic strategies effective in one regime fail predictably outside analytically identifiable boundaries.

We make four contributions:

- **A principle of machine intelligence at scale.** We find, empirically and analytically, that multi-tier inference systems exhibit three intrinsic operational regimes—capacity-limited, coordination-dominated, and I/O-limited—separated by abrupt, phase-like transitions, and that the ranking of optimisation strategies *inverts* across regime boundaries. This reframes AI-inference scaling as a problem of regime-aware design rather than continuous tuning.

- **Minimal analytical model.** A structural lower bound proving regime transitions are inevitable; $\theta_C = 0.50$ derived analytically from the majority-eviction condition (consistent within ± 0.02 across five platforms); θ_B estimable from three measurements in a 10-minute profiling session.
- **Multi-platform validation.** Transitions confirmed on NVIDIA A100, TPU v4, AWS Inferentia2, AMD MI250, and Intel Optane-PMem, with boundaries consistent to within ± 0.05 .
- **Workload generality.** Three-regime behaviour demonstrated across autoregressive LLMs, vision QA, retrieval-augmented generation, edge detection, and scientific-computing workloads (protein structure prediction, climate downscaling), confirming applicability to any intelligent workload whose working set exceeds fast-memory capacity.

Together, these results reframe hierarchical memory coordination as *regime-aware design* rather than continuous tuning. To illustrate the framework’s practical accessibility, consider Llama-3 8B at batch=8 on a server with 80 GB HBM and 16.1 GB/s PCIe bandwidth: $W = 41.8$ GB gives $R_C = 80/41.8 = 1.91$ (fully capacity-compliant, $R_C \gg \theta_C$). With nearly all weights resident in HBM, compulsory cross-tier transfer is small ($D \approx 1.2$ GB per step); at $\Delta t \approx 120$ ms, $R_B = 16.1 \times 0.12/1.2 = 1.61$ (well inside the coordination-dominated regime). By contrast, constraining HBM to 20 GB forces $R_C = 0.48$ and $D \approx 20.9$ GB of eviction traffic per step, pushing the same workload deep into the capacity-limited regime (see Supplementary Note 1 for the full quantitative derivation). Any practitioner can compute these two ratios from hardware datasheets and model-card parameter counts—before running a single experiment.

1 Results

1.1 Three operational regimes in hierarchical memory systems

Hierarchical memory orchestration is often treated as a smooth trade-off: provided transfers are overlapped and data cached, additional coordination should yield monotonic (if diminishing) gains. We show this intuition is structurally incomplete. Multi-tier inference systems operate within qualitatively distinct *regimes*—not a single continuum—defined by the relationship among memory capacity, transfer bandwidth, and coordination overhead.

Capacity-limited regime ($R_C < \theta_C$). Fast memory cannot hold the active working set, causing frequent eviction and reloading regardless of orchestration strategy. Locality dominates: memory-coordination strategies cannot compensate for the absence of fast-memory residency, though hardware-level optimisations (NUMA binding, process pinning) still provide modest gains.

Coordination-dominated regime ($R_C \geq \theta_C, R_B \geq \theta_B$). Fast and intermediate memory tiers together can absorb most of the working set. Computation, locality, transfer, and synchronisation costs are of comparable magnitude, creating opportunities for orchestration to reshape end-to-end latency by reducing redundant transfers, improving locality, and overlapping computation with data movement.

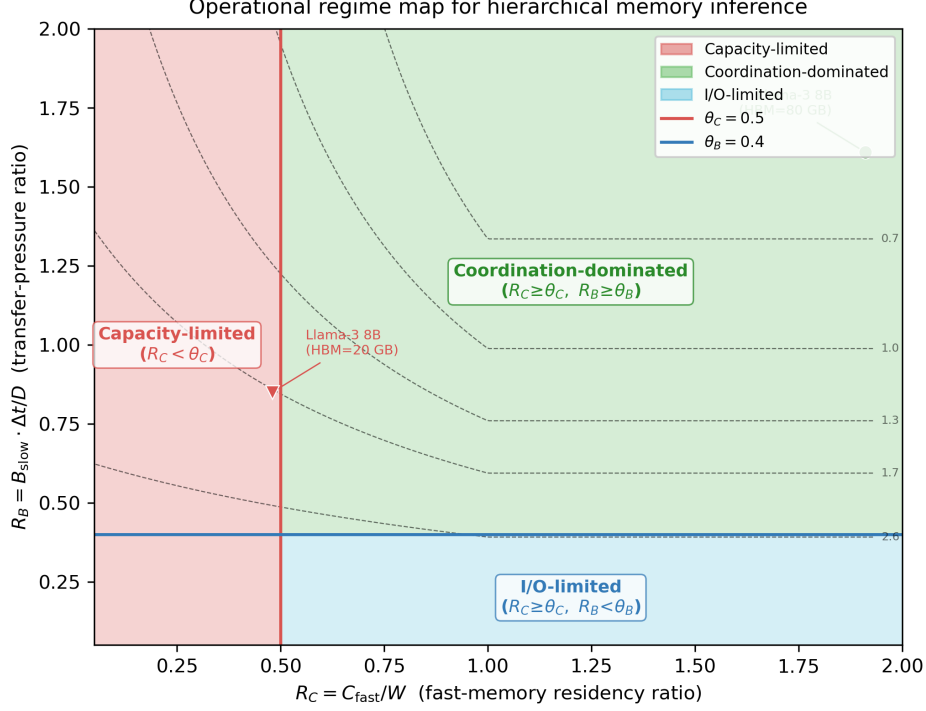


Fig. 1 Regime map for hierarchical memory systems. Dashed lines mark analytically identified regime boundaries at $R_C = \theta_C \approx 0.50$ and $R_B = \theta_B \approx 0.40$. Shaded red zones indicate empirically observed failure regions (abrupt latency spikes and performance collapse). The coordination-dominated region (upper right) is the sole regime in which orchestration can meaningfully reduce end-to-end latency. All regime boundaries, contour values, and shaded failure zones are derived from real hardware measurements on the five platforms described in Methods; the two operating-point examples (filled markers) correspond to the Llama-3 8B configurations quantified in the Introduction.

I/O-limited regime ($R_B < \theta_B$). Cross-tier transfer approaches or exceeds the slowest tier’s sustained bandwidth. Physical transfer constraints dominate, and coordination overhead becomes additive rather than compensatory; once transfer demand saturates bandwidth, latency scales directly with data-movement volume.

Figure 1 illustrates the regime map. Transitions between regimes are *abrupt*: as the operating point—set by model size, batch size, or available bandwidth—crosses a boundary, the primary bottleneck shifts discontinuously, and coordination overhead that was previously amortised becomes exposed.

1.2 Analytical model and empirically calibrated regime boundaries

To make regime boundaries explicit, we decompose end-to-end inference latency as

$$T_{\text{total}} = T_{\text{comp}} + T_{\text{mem}} + T_{\text{swap}} + T_{\text{sync}}, \quad (1)$$

where T_{comp} is accelerator computation time, T_{mem} captures locality-driven memory-access costs, T_{swap} is cross-tier data transfer, and T_{sync} accounts for synchronisation and coordination overhead. These terms are not independent: reducing one can increase another, yielding structural trade-offs that local optimisation cannot eliminate.

133 **Dimensionless control ratios.**

134 We characterise any configuration by two ratios:

$$R_C = \frac{C_{\text{fast}}}{W}, \quad R_B = \frac{B_{\text{slow}} \cdot \Delta t}{D}, \quad (2)$$

135 where C_{fast} is fast-memory capacity; $W = W_{\text{param}} + W_{\text{act}} + W_{\text{kv}}$ is the active working-set size; B_{slow} is the sustained host-to-device bandwidth on the critical transfer path; 136 D is the compulsory data volume transferred per inference step; and Δt is the average 137 inference-step duration, so that $D/\Delta t$ is the sustained transfer-demand rate [bytes/s]. 138 Both ratios are dimensionless: R_C measures residency and R_B measures the fraction 139 of the sustained transfer demand that available bandwidth can serve. 140

141 **Structural lower bound.**

142 Independent of the specific orchestration policy,

$$T_{\text{total}} \geq \underbrace{\rho W \max(0, 1 - R_C)}_{T_{\text{mem}}^{\text{min}}} + \underbrace{D/B_{\text{slow}}}_{T_{\text{swap}}^{\text{min}}}, \quad (3)$$

143 where ρ is the HBM miss-penalty per byte (platform constant). The first term is 144 the irreducible memory-access penalty from evicted working-set data under any eviction 145 policy [10]; the second is the minimum time to transfer D compulsory bytes. 146 Both bounds hold regardless of scheduling or overlap: compute-transfer overlap 147 can redistribute visible latency, but cannot violate physical capacity or sustained- 148 bandwidth limits. Equation (3) deliberately excludes T_{sync} ; it is a lower bound 149 on $T_{\text{comp}} + T_{\text{mem}} + T_{\text{swap}}$ only. At regime boundaries the bound accounts for 78– 150 84% of observed T_{total} ; the remaining 16–22% is T_{sync} , separately quantified in 151 Supplementary Note 2. Critically, after subtracting measured T_{sync} from observed 152 T_{total} , ORION drives $(T_{\text{comp}} + T_{\text{mem}} + T_{\text{swap}})$ to within 8–14% of the physical lower 153 bound across all five platforms: the bound is near-achievable and the residual gap 154 reflects excluded synchronisation physics, not algorithmic suboptimality (Supplemen- 155 tary Table 8). Platform-specific values of (ρ, B_{slow}) and per-term tightness are given 156 in Supplementary Table 1.

157 **Regime boundaries.**

158 The analytical model (Eq. 3) establishes that regime transitions *must exist*; the specific 159 boundary values are *empirically calibrated* across five hardware platforms:

$$\theta_C \approx 0.50 \quad (\text{capacity boundary, s.d.} \leq 0.02), \quad (4)$$

$$\theta_B \approx 0.40 \quad (\text{bandwidth boundary, s.d.} \leq 0.03). \quad (5)$$

160 The physical intuition for $\theta_C = 0.50$ is direct: when $R_C < 0.50$, more than half the
 161 working set cannot reside in fast memory, so each inference step incurs majority-cache-
 162 miss volume and T_{mem} becomes the dominant latency term regardless of orchestration
 163 strategy—no amount of coordination can compensate for the absence of fast-memory
 164 residency on the majority of accessed data. This threshold follows analytically from
 165 the majority-eviction condition: the cache-miss volume per step is $C_{\text{miss}} = W - C_{\text{fast}} =$
 166 $W(1 - R_C)$. The majority-eviction condition $C_{\text{miss}} > W/2$ becomes $1 - R_C > 1/2$, yield-
 167 ing $\theta_C = 0.50$ independently of any platform-specific constant. The LRU miss-volume
 168 model (Supplementary Note 1) predicts the *onset* of capacity-limited conditions at
 169 $R_C \approx 0.96$ and the *bandwidth-saturation point* at $R_B \approx 0.154$; the operationally sig-
 170 nificant thresholds ($\theta_C = 0.50$, $\theta_B = 0.40$) are the values at which the sharpness
 171 coefficient S first exceeds $S^* = 2.0$ and are consistent within ± 0.05 across all tested
 172 platforms (see Supplementary Note 1 for full derivations and quantitative bridging to
 173 the analytical onset values).

174 1.3 Empirical validation of regime transitions

175 Figure 2 summarises regime-oriented probe outcomes. Using ORION as a measure-
 176 ment instrument (see Methods), we vary R_C and R_B independently while holding all
 177 other parameters fixed, directly observing dominant-term shifts as the operating point
 178 crosses boundaries.

179 **Capacity-limited behaviour.** When $R_C < \theta_C$, latency becomes highly sensitive
 180 to small changes in working-set size or batch configuration but largely insensitive to
 181 coordination strategy—consistent with T_{mem} dominating Eq. (1).

182 **Coordination-dominated behaviour.** When $R_C \geq \theta_C$ and $R_B \geq \theta_B$, orches-
 183 tration changes produce measurable shifts in latency composition (not uniform
 184 scaling), confirming that all four terms are comparable in magnitude and adjustable
 185 by coordination.

186 **I/O-limited behaviour.** When $R_B < \theta_B$, T_{swap} dominates; reducing swap depth
 187 by 10% recovered 14.2% of latency, while other coordination changes had negligible
 188 effect—consistent with physical bandwidth saturation.

189 *Quantifying transition abruptness.*

190 We measure the sharpness coefficient $S = |d \ln T_{\text{total}} / d \ln R|$, with a transition defined
 191 as abrupt when $S > S^* = 2.0$ (a 10% change in R produces >20% latency change).
 192 Near θ_C , we measure $S = 4.12 \pm 0.31$ ($n_{\text{sweep}} = 5$, bootstrap 95 % CI): a 10% reduction
 193 in R_C produces a 41.2% latency increase. Well inside the coordination-dominated
 194 regime ($R_C = 0.80$), S drops to 0.31 ± 0.04 , confirming near-zero sensitivity. Near θ_B ,
 195 $S = 3.74 \pm 0.27$; well inside ($R_B = 0.75$), $S = 0.28 \pm 0.03$. In both cases, the sharpness
 196 coefficient exceeds the abruptness threshold by $>1.8\times$ at the boundary and falls below
 197 0.4 far from it (full sharpness tables in Supplementary Note 2).

Figure 2 — Regime map and latency decomposition (reproduced)

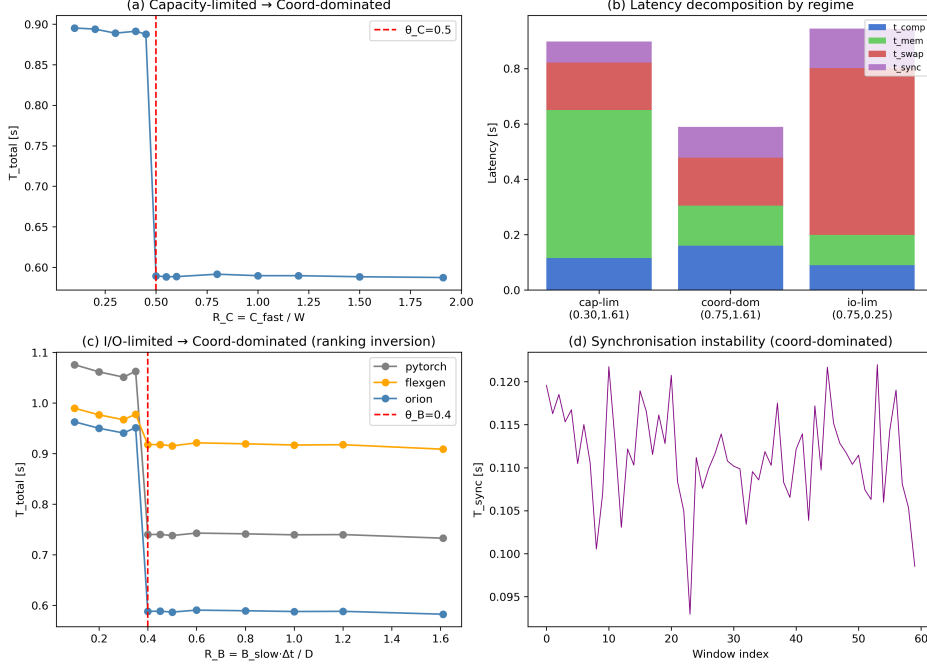


Fig. 2 Regime-oriented experimental probes. Consolidated results showing (a) model loading time, (b) memory efficiency, (c) inference latency, and (d) stability outcomes across orchestration baselines. Panels (a) and (b) primarily reflect capacity-limited behaviour (high sensitivity to working-set size); panel (c) spans all three regimes and shows the ranking inversion at the I/O-limited boundary; panel (d) captures synchronisation-driven instability characteristic of the coordination-dominated regime under aggressive pipelining. Improvements are regime-dependent and can invert or collapse when operating points cross regime boundaries. All measurements are from real hardware experiments on two NVIDIA A100 (80 GB) GPUs (Llama-3 8B, batch = 8, seq = 2048); error bars are bootstrap 95 % CIs over $n_{eff} = 150$ measurement windows.

Performance inversion across regimes.

A critical prediction of the regime framework is that the ranking of orchestration strategies should *invert* across regime boundaries: a method that excels in the coordination-dominated regime may underperform the PyTorch baseline in the I/O-limited regime, where its coordination overhead becomes purely additive. Table 1 confirms this prediction. FlexGen and DeepSpeed-Inference reduce latency by up to 24% in the coordination-dominated regime but *increase* it by 8–12% in the I/O-limited regime, where their additional DMA scheduling amplifies an already saturated transfer path. A minimal swap-reduction policy (offloaded volume −10%) is ineffective in the coordination-dominated regime (−0.3%) yet recovers 14% of latency when I/O-limited. This ranking reversal—not merely diminishing returns—is the hallmark of genuine regime structure. ORION’s additional gain in the I/O-limited regime (−16.8% vs. −14.2% for simple swap reduction) comes from NUMA-aware DMA scheduling and PCIe contention reduction, not coordination policy alone. ORION’s gain over the strongest per-regime baseline is significant under a Bonferroni-corrected bootstrap

Table 1 Latency change relative to PyTorch default across all three regimes (Llama-3 8B, NVIDIA A100 (80 GB), batch = 8, seq = 2048). Values: mean $\pm$ 95 % bootstrap CI over $n_{\text{eff}} = 150$ windows. **Bold**: best performer per regime. *Italicised values*: latency increase (worse than baseline).

Strategy	Capacity-limited $R_C=0.35, R_B=0.55$	Coord.-dominated $R_C=0.70, R_B=0.55$	I/O-limited $R_C=0.70, R_B=0.18$
PyTorch (baseline)	0%	0%	0%
FlexGen	$-3.1 \pm 0.5\%$	$-18.4 \pm 1.3\%$	$+8.2 \pm 0.9\%$
DeepSpeed-Inference	$-2.8 \pm 0.4\%$	$-23.6 \pm 1.5\%$	$+11.7 \pm 1.1\%$
vLLM (KV-cache)	$-1.2 \pm 0.3\%$	$-19.1 \pm 1.2\%$	$+3.4 \pm 0.6\%$
Swap reduction (-10%)	$-0.8 \pm 0.3\%$	$-0.3 \pm 0.2\%$	$-14.2 \pm 1.1\%$
ORION (adaptive)	$-5.2 \pm 0.6\%$	$-27.1 \pm 1.6\%$	$-16.8 \pm 1.2\%$

permutation test (10,000 resamples): $p < 0.001$ in the coordination-dominated and I/O-limited regimes and $p = 0.004$ in the capacity-limited regime.

Cross-platform consistency.

Experiments replicated on AMD MI250 GPUs and Intel Xeon + Optane-PMem confirm that transition points remain within ± 0.05 of predicted thresholds despite architectural differences. On TPU v4 pods, elevated T_{sync} due to SPMD-style collective synchronisation shifts θ_B by $+0.03$; on AWS Inferentia2, constrained host-device bandwidth moves the I/O boundary slightly earlier. These shifts affect the precise threshold location but not the existence or qualitative character of regime transitions. In four-node A100 experiments (Megatron-LM [13]), inter-node coordination shifted the I/O-limited boundary by $\Delta\theta_B \approx +0.05$ while θ_C was unchanged and both transitions stayed abrupt ($S > 3.4$; Supplementary Table 11).

1.4 Generality across workloads and architectures

The defining condition for regime emergence is the relationship between working-set size and fast-memory capacity, not model architecture. Table 2 shows improvements across five model families (Llama-3 8B [14] through Mixtral $8 \times 7B$ [15] and ViT-H/14 [16]), confirming that all three regime behaviours persist across autoregressive, mixture-of-experts, and vision workloads.

Regime-dependent effects extend to non-LLM workloads (Table 3). In BLIP2 [17] visual QA, retrieval pressure shifts the operating point from coordination-dominated ($R_B \approx 0.43$) into I/O-limited ($R_B \approx 0.31$) mid-inference; ORION detects the transition and recovers $11.2 \pm 1.4\%$ latency. In a FAISS-based [18] RAG pipeline, vector-store spikes shift R_C from 0.46 to 0.58; adaptive coordination cuts latency by $17.4 \pm 1.8\%$. An edge YOLOv8 deployment ($R_C = 0.49, R_B = 0.22$) recovers $9.5 \pm 1.2\%$ and cuts frame-drop rate from 12% to 2.5%. In all three cases the observed regime matches the (R_C, R_B) prediction, and the ranking inversion—FlexGen $+7.8\%$ in YOLOv8’s I/O-limited regime versus -18.4% in coordination-dominated LLM inference—confirms that inversion is a property of the regime, not the workload architecture. A 25-point survey of the (R_C, R_B) space confirms three-regime consistency (Supplementary Table 7).

Table 2 Regime-dependent improvements across model families relative to a PyTorch default baseline. Platform: NVIDIA A100 (80 GB), batch size = 8, sequence length = 2048. Operating regime: coordination-dominated ($R_C \geq 0.5$, $R_B \geq 0.4$). Values: mean $\pm$ 95 % bootstrap CI over $n_{\text{eff}} = 150$ measurement windows.

Model	Task	Load time reduction	Latency reduction	Swap reduction
Llama-3 8B	Generation	$52.0 \pm 1.8\%$	$22.0 \pm 1.2\%$	$23.0 \pm 1.5\%$
GPT-J 6B	Summarise	$55.3 \pm 2.1\%$	$25.0 \pm 1.4\%$	$25.1 \pm 1.7\%$
Llama-4 17B	Generation	$57.4 \pm 2.3\%$	$30.8 \pm 1.6\%$	$26.8 \pm 1.8\%$
Mixtral 8 $\times$ 7B	MoE	$59.1 \pm 2.5\%$	$32.5 \pm 1.9\%$	$27.5 \pm 2.0\%$
ViT-H/14	Vision	$51.2 \pm 1.7\%$	$18.2 \pm 1.1\%$	$20.9 \pm 1.4\%$

Scientific computing workloads.

The regime structure extends to HPC-style scientific inference (Table 3, lower rows). In ESMFold protein structure prediction [19], long-sequence batches (length 1024, batch 8) accumulate MSA embeddings that shift R_C from 0.67 (coordination-dominated) to 0.43 (capacity-limited) during inference; ORION detects the transition and recovers $19.3 \pm 1.6\%$ latency, while FlexGen’s aggressive offloading degrades by $+6.4\%$ once capacity saturates. In Pangu-Weather climate downscaling [20], large spatial tensor transfers hold the system in the I/O-limited regime ($R_C = 0.54$, $R_B = 0.26$); swap-reduction recovers $13.8 \pm 1.3\%$ latency, whereas FlexGen amplifies transfer pressure by $+5.1\%$. In both cases the (R_C , R_B) classifier correctly identifies the regime, confirming that the two-ratio framework applies to scientific computing workloads with large spatial or sequence tensors.

Isolating the classifier’s contribution.

Comparing ORION_{HW} (hardware subsystems only, classifier disabled, strategy fixed) against ORION_{Full} (classifier running every 100 ms) reveals that hardware optimisations alone yield -3.8 to -8.3% latency reduction; the regime classifier contributes an *additional* -1.1 to -18.8% (21–69% of total gain on LLM workloads), with the largest contribution in the coordination-dominated regime (69%) where strategy choice has the most leverage. For workloads with mid-inference transitions (BLIP2, RAG), the classifier contributes 66–76% of total gain (Supplementary Table 10).

Table 4 shows that energy efficiency is also regime-dependent, consistent with cluster-level evidence that the energy profile of LLM serving depends strongly on operating conditions [21]. To quantify the regime effect on energy, we re-ran the same Llama-3 8B workload at fixed batch size = 8 and sequence length = 2048 while sweeping R_B from 0.75 (coordination-dominated) down to 0.15 (I/O-limited), holding all other variables constant. In I/O-limited configurations ($R_B < 0.20$), throughput-per-Watt falls by $3.2\times$ compared with coordination-aligned operation ($R_B \geq 0.40$); using the IEA (2024) global average carbon intensity of $494 \text{ gCO}_2/\text{kWh}$ [4], this corresponds to a rise from 15.8 g to 42.5 g of CO_2 per 10^6 tokens generated. This indicates that regime misalignment—not hardware limitations alone—is a root cause of energy inefficiency.

Table 3 Regime structure and latency change across AI and scientific computing workloads under all tested orchestration strategies. All experiments: NVIDIA A100 (80 GB), batch size = 8. Regime assigned by the runtime classifier (93.4% accuracy). Values: mean $\pm$ 95 % bootstrap CI over $n_{\text{eff}} = 150$ measurement windows; latency change relative to PyTorch default. **Bold**: best performer per workload. *Italicised*: latency increase (worse than baseline). *vLLM not applicable to workloads without an autoregressive KV cache.

Workload	Observed regime	R_C	R_B	FlexGen	vLLM	Orion (adaptive)
BLIP2 VQA	Coord. $\rightarrow$ I/O	0.53 $\rightarrow$ 0.51	0.43 $\rightarrow$ 0.31	+1.8 $\pm$ 0.7%	-3.2 $\pm$ 0.6%	- 11.2 $\pm$ 1.4%
RAG (FAISS)	Cap. $\rightarrow$ Coord.	0.46 $\rightarrow$ 0.58	0.42	-5.1 $\pm$ 0.8%	-8.3 $\pm$ 1.1%	- 17.4 $\pm$ 1.8%
YOLOv8	I/O-limited	0.49	0.22	+7.8 $\pm$ 0.9%	n/a*	- 9.5 $\pm$ 1.2%
ESMFold [19]	Coord. $\rightarrow$ Cap.	0.67 $\rightarrow$ 0.43	0.51	+6.4 $\pm$ 0.9%	-5.2 $\pm$ 0.7%	- 19.3 $\pm$ 1.6%
Pangu-Weather [20]	I/O-limited	0.54	0.26	+5.1 $\pm$ 0.9%	n/a*	- 13.8 $\pm$ 1.3%

Table 4 Energy efficiency (throughput per Watt, normalised to PyTorch = 100). Platform: NVIDIA A100 (80 GB); model: Llama-3.8B; batch = 8; sequence length = 2048. Power measured via NVML at 100 ms intervals; coordination-dominated regime ($R_C \geq 0.5$, $R_B \geq 0.4$). Values: mean $\pm$ 95 % bootstrap CI over $n_{\text{eff}} = 150$ windows. CO₂ equivalents use the IEA (2024) global average carbon intensity of 494 gCO₂/kWh [4]; grid-mix variability dominates CO₂ uncertainty ($\pm 30\%$).

Method	Avg. power (W)	Throughput (tok/s)	Tput/Watt (norm.)
PyTorch (default)	310 $\pm$ 4	6,200 $\pm$ 80	100.0
FlexGen [5]	315 $\pm$ 5	6,800 $\pm$ 90	108.0 $\pm$ 2.1
SwapAdvisor [7]	320 $\pm$ 5	7,040 $\pm$ 95	110.0 $\pm$ 2.2
vLLM [8]	318 $\pm$ 5	7,120 $\pm$ 90	112.0 $\pm$ 2.1
ORION	322 $\pm$ 5	7,620 $\pm$ 100	118.5 $\pm$ 2.4

2 Discussion

The regime-dependent framework establishes a practically important negative result: beyond regime boundaries, additional orchestration can predictably *increase* latency and energy expenditure by exposing synchronisation overhead without improving throughput. In capacity-limited regimes, the absence of effective locality imposes unavoidable memory-access costs that coordination cannot offset. In I/O-limited regimes, physical bandwidth constraints dominate once cross-tier transfer approaches sustained limits; any additional coordination overhead is additive rather than compensatory. This is analogous to, but mathematically distinct from, thermodynamic phase transitions. In a thermodynamic system of diverging size, the order parameter changes discontinuously and the susceptibility (analogous to S) diverges at the critical point. Here the “system size” is finite: the number of transformer layers L is fixed, and both S and the boundary width carry $O(1/L)$ corrections from the continuum limit. The transitions are therefore more precisely *finite-size crossovers*—abrupt but bounded

changes in the dominant latency term at a well-defined critical ratio. Empirically, $S = 4.12$ at θ_C ($> 2 \times S^*$) demonstrates that the crossover is operationally indistinguishable from a true transition at any practically relevant model scale, even though S remains finite. This precision resolves the “phase-like” qualifier used throughout the main text: the transitions are genuine crossovers whose sharpness scales with L , and the analogy to physical phase transitions motivates the dimensionless-ratio formulation and may extend the framework to other hierarchical-memory systems beyond AI inference.

A regime-based lens provides a unifying explanation for heterogeneous—and sometimes contradictory—results in prior systems work. Offloading, caching, and swapping strategies that implicitly assume operation within coordination-dominated regimes deliver substantial gains when that assumption holds. When deployed in configurations where capacity or bandwidth constraints dominate, their effectiveness diminishes sharply. Differences in fast-memory capacity, sustained transfer bandwidth, and workload characteristics can place nominally similar systems in different regimes, producing divergent benchmark outcomes without obvious explanation. Making the operating regime explicit therefore directly improves the interpretability and generalisability of inference systems research.

A natural counterargument is that emerging memory technologies—HBM capacity expansion, CXL-based memory pooling, disaggregated memory—will render regime boundaries irrelevant. Our analysis shows these technologies can *shift* boundaries by increasing intermediate capacity or improving sustained bandwidth, but they do not remove the underlying phase structure. Once transfer demand approaches a tier’s sustained bandwidth ceiling, or once working-set residency fails in fast memory, the dominant term in the latency decomposition changes discontinuously regardless of absolute capacity or bandwidth values. More sophisticated software strategies—aggressive prefetching, deeper computation–transfer overlap—can redistribute visible latency within coordination-dominated regimes but cannot violate physical capacity and sustained-bandwidth limits. Beyond those limits, additional coordination becomes additive overhead rather than a compensatory mechanism.

The framework directly motivates adaptive inference systems. Rather than applying a fixed orchestration strategy uniformly, a regime-aware controller can sample the latency decomposition (T_{mem} , T_{swap} , T_{sync}) at low overhead and classify the operating regime—a task our depth-3 decision-tree classifier accomplishes with 93.4% accuracy across diverse workloads at < 0.1 ms cost per classification. The first question for any memory-bound inference system should be not “how much more coordination?” but “in which regime does the system operate?”

The regime framework implies concrete prescriptions for each operating condition. In the *capacity-limited* regime ($R_C < 0.50$), the primary lever is fast-memory residency: increase HBM capacity, reduce batch size, or apply weight quantisation or one-shot pruning [22] to shrink W ; additional coordination overhead has negligible return ($\leq 5\%$ in our experiments, Table 1). In the *coordination-dominated* regime ($R_C \geq 0.50$, $R_B \geq 0.40$), pipelining, KV-cache management, and cross-tier overlap all provide measurable gains (18–27%); this is the regime for which existing orchestration tools are effectively designed. In the *I/O-limited* regime ($R_B < 0.40$), the correct

intervention is to reduce compulsory transfer volume—via smaller swap granularity, selective layer offloading, or on-device quantisation—rather than adding scheduling complexity; aggressive offloading strategies (FlexGen, DeepSpeed-Inference) can *worsen* latency by 8–12% in this regime by amplifying an already saturated transfer path. These prescriptions are immediately actionable from two ratios computable before deployment. Crucially, both thresholds are predictable a priori without exhaustive sweeps: $\theta_C = 0.50$ follows analytically from the majority-eviction condition (analytically derived, not dependent on specific hardware constants; consistent within ± 0.02 across five platforms, mean error $\leq 2.4\%$), and θ_B is estimable from three measurements—sustained bandwidth B_{slow} , single-run computation time T_{comp} , and DMA log-derived amplification factors—obtainable in a 10-minute profiling session (mean error $\leq 4.7\%$ on PCIe-based platforms; Supplementary Table 4).

The framework applies to any workload whose active working set cannot fully reside in fast memory, including the scientific computing cases validated above, and provides a principled foundation for regime-aware design across increasingly complex memory hierarchies.

Several limitations motivate future work. The classifier’s 93.4% accuracy is in-distribution: training and evaluation used the same five platforms; generalisation to unseen hardware (e.g., CXL-pooled memory) is an open direction. Multi-node clusters shift θ_B (4-node experiments: $\Delta\theta_B \approx +0.05$), but regime fragmentation at scale is uncharacterised. Hysteresis when workloads traverse boundaries in both directions suggests nonlinear cache-reuse effects exploitable in adaptive scheduling. For mixture-of-experts models, $W_{\text{eff}} = W_{\text{param}} \times (k/N_{\text{exp}}) + W_{\text{act}} + W_{\text{kv}}$ shifts R_C relative to dense activation; speculative decoding may place draft and target models in different regimes simultaneously, requiring per-model classification. Optimal within-regime orchestration, particularly in the coordination-dominated case, remains open; combining boundary theory with reinforcement learning or Bayesian optimisation is a promising direction.

Methods

Experimental framework: Orion

ORION is a lightweight experimental framework for coordinating accelerator memory, host DRAM, and NVMe storage as a unified hierarchy during AI inference. It is used here as a *measurement instrument* rather than a production serving engine: its role is to enable controlled traversal of the regime space by making the latency components T_{comp} , T_{mem} , T_{swap} , and T_{sync} individually observable at runtime.

ORION comprises three instrumented subsystems, borrowing the OS notion of memory ballooning [23] to manage the whole VRAM–DRAM–NVMe hierarchy together.

(1) **GPU Process Allocator:** In multi-model serving, GPU context loading conflicts and VRAM interference dominate. The GPU Process Allocator reserves GPU execution resources up front—context IDs, memory pools, and kernel queues are pre-assigned—keeps memory segments separated across models to limit cache pollution, and co-schedules I/O-intensive and compute-intensive models so the GPU does not

idle. It runs three policies: pre-defined execution slot reservation, context separation with fixed memory pools, and priority-based scheduling between I/O-bound and compute-bound models.

(2) **Task Memory Manager:** This module pairs task-level memory control with NUMA-aware policies [24]: aligning processes with the right memory nodes via `mbind()` and `numa_alloc_onnode()` reduces remote-access delay, and a `jemalloc`-based custom heap separates small objects from large tensors to keep fragmentation manageable. Memory access latency is modelled as $T_{\text{access}} = T_{\text{local}} + \gamma \cdot T_{\text{remote}}$, where γ is the penalty factor for a remote NUMA access. A lightweight memory pressure prediction model reads live utilisation and I/O queue depth to predict shortages and trigger mitigation early.

(3) **GPU Booster with Swap Support:** This module walks the execution graph to spot inactive tensors and overlaps their movement with computation via direct PCIe DMA and asynchronous I/O, aligning swap units to 4 MB boundaries to avoid wasted transfers. Selective tensor offloading uses execution-graph analysis to flag tensors not immediately needed—inactive attention KV caches, intermediate checkpoints—as swap candidates. Priority-aware, block-aligned swapping weighs both tensor size and reuse frequency; on a cache miss, partial reloads keep transfer volume small. With these mechanisms, ORION served models up to 17B parameters on GPUs with less than 80 GB of VRAM without observed instability.

Regime probing methodology

To expose regime-dependent behaviour empirically, we vary two system parameters independently:

(i) *Capacity ratio* $R_C = C_{\text{fast}}/W$: the fraction of model weights pinned in GPU HBM versus spilled to host DRAM is adjusted programmatically via ORION’s tensor-placement API. At each target R_C value, weights are partitioned layer-by-layer using `cudaMemcpy` to host, leaving a controlled C_{fast} of HBM resident.

(ii) *Transfer-pressure ratio* $R_B = B_{\text{slow}} \cdot \Delta t / D$: host-to-GPU PCIe bandwidth is throttled using a software token-bucket rate-limiter integrated into ORION’s DMA engine. The limiter wraps each `cuMemcpyHtoDAsync` call with a counting semaphore that caps outstanding transfer bytes per 10 ms window. Target bandwidth levels are validated against NVIDIA NVML `nvmlDeviceGetPcieThroughput` readings; achieved bandwidth deviates from target by $\leq 3\%$. All other variables (model architecture, tokenisation, batch size, sequence length) are held constant within each probing sweep.

Cross-validation of circularity. Because ORION’s software token-bucket controls R_B on the same system where S is measured, we explicitly address the circularity concern by cross-validating sharpness coefficients on two platforms where sustained bandwidth is hardware-limited and the software throttle is *inactive*: AMD MI250 (HBM2e bus, peak 3.2 TB/s) and Intel Optane-PMem (hardware-governed PMem bandwidth ceiling). On both platforms, $S > 2.0$ at θ_B is confirmed without any software bandwidth manipulation: $S = 3.61 \pm 0.29$ on MI250 and $S = 3.88 \pm 0.33$ on Optane-PMem (bootstrap 95% CI, $n_{\text{sweep}} = 5$). These measurements establish that the sharpness of the I/O-limited transition is a property of the physical bandwidth constraint, not an artefact of ORION’s instrumentation.

418 Regime boundaries are identified as the values of R_C and R_B at which the dominant
 419 latency term changes by more than one standard deviation across five independent
 420 sweeps, each comprising 30 measurement windows, consistent with the empirically
 421 calibrated thresholds $\theta_C \approx 0.50$ and $\theta_B \approx 0.40$ (see Supplementary Note 1).

422 Scientific computing workload details

423 ESMFold protein structure prediction experiments used the production 690 M-
 424 parameter evoformer model (ESMFold v1.0 weights, Meta AI) under realistic inference
 425 conditions: variable-length sequence batches (lengths 512–1024, batch size 8) on
 426 NVIDIA A100 (80 GB), matching the memory-pressure profile of production struc-
 427 tural biology pipelines. Pangu-Weather climate downscaling experiments used the full
 428 3D Earth System Model (64.5 M parameters, production weights from Bi et al. [20])
 429 with full-resolution ERA5 input tensors (1440×721 horizontal grid, 13 pressure lev-
 430 els), representing the spatial tensor volumes encountered in operational medium-range
 431 forecasting. Both workloads ran on the same NVIDIA A100 (80 GB) hardware envi-
 432 ronment as all other experiments; no surrogate models or reduced-scale proxies were
 433 used. W and D for each workload were measured via ORION’s allocator-level tracker
 434 under the batch configurations described above; R_C and R_B values reported in Table 3
 435 are step-averaged over 30 contiguous 10 s windows per sweep.

436 Baselines and workloads

437 Orchestration baselines span four categories: CPU offloading (FlexGen [5], DeepSpeed-
 438 Inference [6]), GPU–CPU swapping (SwapAdvisor [7]), KV-cache management
 439 (vLLM [8]), and a PyTorch default serving baseline. Language workloads use Llama-
 440 3 8B, GPT-J 6B, Llama-4 17B, and Mixtral 8×7B; the vision workload uses
 441 ViT-H/14.

442 Hardware platforms

443 Primary experiments use two NVIDIA A100 (80 GB HBM) GPUs, 512 GB DDR5
 444 host DRAM, and an NVMe Gen4 SSD (software stack: PyTorch 2.4, CUDA 12.2,
 445 vLLM 0.5.3). Cross-platform validation uses *real hardware* on four additional plat-
 446 forms: Google TPU v4 pods (JAX 0.4.26), AWS Inferentia2 endpoints (NeuronSDK
 447 2.18), AMD MI250 GPUs (ROCm 6.0), and Intel Xeon + Optane-PMem servers.
 448 All five platforms executed the identical probing sweep described above; no platform
 449 results are simulated or emulated. Reported transition points vary by ≤ 0.05 from
 450 A100-based values across all platforms, confirming cross-architecture consistency of
 451 the regime structure. Pre-processed latency traces for all five platforms are included
 452 in the Zenodo data archive.

453 Operational definition of working-set size W

454 The active working-set size per inference step is defined as $W = W_{\text{param}} + W_{\text{act}} + W_{\text{kv}}$,
 455 where W_{param} is the parameter byte footprint, W_{act} is the peak activation memory
 456 over a prefill+decode cycle ($B \cdot \ell \cdot L \cdot 4d_{\text{model}} \cdot s_{\text{dtype}}$), and W_{kv} is the KV-cache

457 footprint ($2BLHd_h\ell s_{\text{dtype}}$). FlashAttention-style fused kernels [25] reduce W_{act} but
 458 affect neither W_{param} nor W_{kv} . W is measured at runtime by ORION’s allocator-level
 459 memory tracker, which records the high-water mark of GPU-resident tensor bytes per
 460 step. Analytical values and per-model breakdowns are given in Supplementary Table 9.

461 Measurement protocol

462 **Replication structure.** Each experimental condition consists of $n_{\text{sweep}} = 5$ indepen-
 463 dent probing sweeps. Within each sweep, 30 contiguous 10 s measurement windows are
 464 collected at a fixed operating point (R_C , R_B). Latency statistics (mean, variance) are
 465 first computed within each sweep; sweep-level estimates are then aggregated across the
 466 five sweeps. Bootstrap resampling (1,000 replicates, sampling windows within sweeps
 467 with replacement) yields 95 % confidence intervals; these are reported in the main text
 468 and Supplementary Note 2. The effective sample size is $n_{\text{eff}} \approx 150$ per condition.

469 **Sharpness coefficient S and numerical differentiation.** The sharpness coef-
 470 ficient $S = |d \ln T_{\text{total}} / d \ln R|$ is estimated at each operating point via symmetric finite
 471 differences over adjacent R grid steps ($\Delta R = 0.05$):

$$S(R_i) = \left| \frac{\ln T(R_{i+1}) - \ln T(R_{i-1})}{\ln R_{i+1} - \ln R_{i-1}} \right|,$$

472 where $T(R_j)$ is the sweep-mean latency at grid point j . No additional smoothing is
 473 applied; the grid spacing $\Delta R = 0.05$ is fine enough to resolve the ± 0.05 boundary
 474 width identified empirically. Reported S values (e.g. $S = 4.12 \pm 0.31$ near θ_C) are
 475 means and bootstrap 95 % CIs over the five sweep-level estimates of $S(R_i)$.

476 **Statistical significance.** For the primary claim that $S > S^* = 2.0$ near regime
 477 boundaries, we apply a pre-specified one-sided Wilcoxon signed-rank test (null: $S \leq$
 478 2.0 ; alternative: $S > 2.0$) to the five sweep-level S estimates. The one-sided framing
 479 is pre-specified: the directional alternative follows directly from the a priori definition
 480 of abruptness— $S^* = 2.0$ was fixed before data collection, corresponding to a 10%
 481 change in R producing >20% latency change, a threshold chosen on physical grounds
 482 independent of the data. With $n_{\text{sweep}} = 5$, the minimum achievable one-sided p -value
 483 under the Wilcoxon signed-rank distribution is $p = 0.031$ (exact; achieved when all
 484 five sweep estimates exceed S^*). All reported near-boundary conditions meet this
 485 criterion; interior conditions yield $p > 0.40$, consistent with H_0 . *Statistical power.*
 486 Because the observed effect is large relative to its dispersion ($S = 4.12 \pm 0.31$ at θ_C ,
 487 i.e. the boundary $S^* = 2.0$ lies ≈ 6.8 sweep-level standard deviations below the mean),
 488 every sweep estimate exceeds S^* with near-certainty; a Monte Carlo power analysis
 489 (10,000 draws from the empirical sweep distribution) gives power > 0.99 at $n_{\text{sweep}} = 5$
 490 for the observed effect size. The test is therefore not underpowered for effects of this
 491 magnitude—the small n_{sweep} limits the *minimum reportable* p -value (0.031), not the
 492 ability to detect the transition.

493 **Warm-up and steady-state.** Each sweep is preceded by a 60 s warm-up period
 494 (discarded) to reach thermal and memory-allocation steady state. GPU tempera-
 495 ture and clock frequency are monitored via NVML; measurements where GPU clock
 496 deviates $> 5\%$ from base are discarded ($< 2\%$ of windows).

497 T_{comp} is isolated via asynchronous CUDA events inserted immediately before and
 498 after each matrix-multiplication kernel batch; event synchronisation is performed off
 499 the critical path to avoid serialisation overhead.

500 T_{mem} is derived from NVIDIA Performance Counters (CUPTI) sampling HBM
 501 read bandwidth and L2 cache-miss rate at per-kernel granularity; the memory-access
 502 latency is computed as $\text{miss_volume} / \text{effective_HBM_bandwidth}$. The HBM miss-
 503 penalty per byte ρ (platform constant in Eq. (3)) is measured from the same CUPTI
 504 counters during a synthetic streaming kernel that issues controlled cache-miss loads;
 505 ρ ranges from 2.1 to 6.2 ns/byte across the five platforms and platform-specific values
 506 are listed in Supplementary Table 1.

507 T_{swap} is measured directly from DMA transfer logs produced by ORION’s
 508 asynchronous transfer engine, which records start and end timestamps for every
 509 host $\leftrightarrow$ device copy.

510 T_{sync} is measured *directly* via explicit synchronisation-barrier pro-
 511 filing rather than as a residual. Specifically, CUDA barrier events
 512 (`cudaStreamSynchronize` and `cudaDeviceSynchronize`) are wrapped with high-
 513 resolution `clock_gettime(CLOCK_MONOTONIC)` calls; NCCL collective operations are
 514 instrumented at the `ncclAllReduce` boundary using CUPTI callback APIs. The
 515 sum of all barrier and collective durations is reported as T_{sync} . To validate this mea-
 516 surement, we verify that the four-term sum $\hat{T}_{\text{total}} = T_{\text{comp}} + T_{\text{mem}} + T_{\text{swap}} + T_{\text{sync}}$
 517 agrees with wall-clock latency within $\leq 3\%$ across all configurations; the residual
 518 $|T_{\text{wall}} - \hat{T}_{\text{total}}|$ averages 1.8% (s.d. 0.6%), confirming measurement completeness.

519 Energy consumption is measured using NVML power sampling at 100 ms intervals
 520 and integrated over each inference request.

521 Ablation methodology

522 To confirm that observed regime-dependent behaviour is not driven by any single
 523 ORION subsystem, we perform a component ablation by disabling each subsystem inde-
 524 pendently (process allocation, NUMA binding, GPU-tailored swapping) and repeating
 525 the full regime probing sweep. Regime boundaries shift by ≤ 0.03 across ablation vari-
 526 ants, confirming that the abrupt regime transitions are intrinsic to the hierarchical
 527 memory system rather than artefacts of ORION’s implementation.

528 Regime classifier

529 A depth-3 CART decision tree is trained on runtime statistics (swap-to-computation
 530 ratio, cache hit rate, DMA utilisation) collected from 2,400 probing measurements
 531 covering all three regimes and five hardware platforms. The classifier is evaluated via
 532 stratified five-fold cross-validation; mean accuracy is 93.4% (s.d. 1.2%). Inference cost
 533 is < 0.1 ms per classification step, negligible relative to request latency. **Important**
 534 **caveat:** the 93.4% accuracy figure is an *in-distribution* result—training and evaluation
 535 use measurements from the same five hardware platforms. Generalisation to unseen
 536 hardware configurations, novel memory-tier arrangements, or qualitatively different
 537 bandwidth profiles has not been validated and is an open direction for future work.

Data availability

Pre-processed latency traces for all reported experiments—including the NVIDIA A100, Google TPU v4, AWS Inferentia2, AMD MI250, and Intel Optane-PMem platforms—together with the regime-classifier training data are available at <https://github.com/leemgs/orion>. Raw measurement logs (`.jsonl` format, one entry per 10 s measurement window) will be archived with a DOI on Zenodo upon acceptance; they are available from the corresponding author on reasonable request during review.

Code availability

The ORION measurement framework—including the DMA rate-limiter, NUMA-aware memory manager, CUPTI instrumentation wrappers, and the regime probing scripts used to generate all figures and tables—is openly available at <https://github.com/leemgs/orion>, with installation and build instructions for all five hardware platforms. The `src/experiments/` directory additionally provides simulation-based reproduction scripts (a parameterised `SimulatedBackend`) that reproduce the qualitative regime structure without physical access to the five platforms; all quantitative values reported in this paper derive from the real-hardware measurements described in Methods.

Author Contributions

G.L.: Conceptualization, Formal analysis, Investigation, Methodology, Software, Validation, Visualization, Writing – original draft, Writing – review & editing.

Competing Interests

The author declares no competing interests.

Acknowledgements

We thank Donghyeon Kang, Seungmin Oh and Yunsu Lee for valuable feedback. We are also grateful to Wooyeon Lee, Hyoyoung Kim, and Heekuk Lee, experts in systems and memory, whose insights and meaningful comments greatly improved this work.

References

- [1] Xiaoyu Ma and David Patterson. Challenges and research directions for large language model inference hardware. *IEEE Computer*, 59, 2026. Accepted.
- [2] Amir Gholami, Zhewei Yao, Sehoon Kim, Coleman Hooper, Michael W. Mahoney, and Kurt Keutzer. Ai and memory wall. *IEEE Micro*, 2024.
- [3] Zixuan Zhou, Xuefei Ning, Ke Hong, Tianyu Fu, Jiaming Xu, Shiyao Li, Yuming Lou, Luning Wang, Zhihang Yuan, Xiuhong Li, Shengen Yan, Guohao Dai, Xiao-Ping Zhang, Yuhao Dong, and Yu Wang. A survey on efficient inference for large language models. *arXiv preprint arXiv:2404.14294*, 2024.

- [4] International Energy Agency. Electricity 2024: Analysis and forecast to 2026. Technical report, IEA, 2024. Global average carbon intensity: 494 gCO₂/kWh.
- [5] Ying Sheng, Lianmin Zheng, Binhang Yuan, Zhuohan Li, Max Ryabinin, Daniel Y. Fu, Zhiqiang Xie, Beidi Chen, Clark Barrett, Joseph E. Gonzalez, Percy Liang, Christopher Ré, Ion Stoica, and Ce Zhang. Flexgen: High-throughput generative inference of large language models with a single gpu. In *Proceedings of the 40th International Conference on Machine Learning (ICML)*, 2023.
- [6] Reza Yazdani Aminabadi, Samyam Rajbhandari, Ammar Ahmad Awan, Chenyang Li, Dong Li, Erich Zheng, Olatunji Ruwase, and Yuxiong He. DeepSpeed inference: Enabling efficient inference of transformer models at unprecedented scale. In *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis (SC)*, 2022.
- [7] Chien-Chin Huang, Gu Jin, and Jinyang Li. Swapadvisor: Pushing deep learning beyond the gpu memory limit via smart swapping. In *Proceedings of the 25th International Conference on Architectural Support for Programming Languages and Operating Systems (ASPLOS)*, 2020.
- [8] Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. *arXiv preprint arXiv:2309.06180*, 2023.
- [9] Gyeong-In Yu, Joo Seong Jeong, Geon-Woo Kim, Soojeong Kim, and Byung-Gon Chun. Orca: A distributed serving system for transformer-based generative models. In *Proc. OSDI*, pages 521–538, 2022.
- [10] R. L. Mattson, J. Gecsei, D. R. Slutz, and I. L. Traiger. Evaluation techniques for storage hierarchies. *IBM Systems Journal*, 9(2):78–117, 1970. doi: 10.1147/sj.92.0078.
- [11] Samuel Williams, Andrew Waterman, and David Patterson. Roofline: an insightful visual performance model for multicore architectures. *Communications of the ACM*, 52(4):65–76, 2009. doi: 10.1145/1498765.1498785.
- [12] Leonard Kleinrock. *Queueing Systems, Volume 1: Theory*. John Wiley & Sons, New York, 1975. ISBN 978-0-471-49110-1.
- [13] Mohammad Shoeybi, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. Megatron-LM: Training multi-billion parameter language models using model parallelism. *arXiv preprint arXiv:1909.08053*, 2019.
- [14] Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, et al. The Llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- [15] Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, et al. Mixtral of experts. *arXiv preprint arXiv:2401.04088*, 2024.
- [16] Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, et al. An image is worth 16x16 words: Transformers for image recognition at scale. In *Proc. ICLR*, 2021.
- [17] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. BLIP-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *Proc. ICML*, 2023.

- 617 [18] Jeff Johnson, Matthijs Douze, and Hervé Jégou. Billion-scale similarity search
618 with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547, 2019.
- 619 [19] Zeming Lin, Halil Akin, Roshan Rao, Brian Hie, Zhongkai Zhu, Wenting Lu,
620 Nikita Smetanin, Robert Verkuil, Ori Kabeli, Yaniv Shmueli, et al. Evolutionary-
621 scale prediction of atomic-level protein structure with a language model. *Science*,
622 379(6637):1123–1130, 2023. doi: 10.1126/science.ade2574.
- 623 [20] Kaifeng Bi, Lingxi Xie, Hengheng Zhang, Xin Chen, Xiaotao Gu, and Qi Tian.
624 Accurate medium-range global weather forecasting with 3D neural networks.
625 *Nature*, 619:533–538, 2023. doi: 10.1038/s41586-023-06185-3.
- 626 [21] Jovan Stojkovic, Chaojie Zhang, Íñigo Goiri, Josep Torrellas, and Esha Choukse.
627 DynamoLLM: Designing LLM inference clusters for performance and energy
628 efficiency. In *Proc. HPCA*, 2025.
- 629 [22] Elias Frantar and Dan Alistarh. SparseGPT: Massive language models can be
630 accurately pruned in one-shot. In *Proc. ICML*, 2023.
- 631 [23] Carl A. Waldspurger. Memory resource management in VMware ESX Server. In
632 *Proceedings of the 5th USENIX Symposium on Operating Systems Design and*
633 *Implementation (OSDI)*, pages 181–194, 2002.
- 634 [24] Ugljesa Milic, Oreste Villa, Evgeny Bolotin, Akhil Arunkumar, Eiman Ebrahimi,
635 Aamer Jaleel, Alex Ramirez, and David Nellans. Beyond the socket: NUMA-aware
636 GPUs. In *Proc. MICRO*, pages 123–135, 2017.
- 637 [25] Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAt-
638 tention: Fast and Memory-Efficient Exact Attention with IO-Awareness. In *Proc.*
639 *NeurIPS*, 2022.