
(a) How the public training release (measurement-db) is used, split by whole benchmarks

Set	Benchmarks	Pairs	Used for	Reaches the predictor
Validation proxies (2)	2×7	2×9	every design choice	no
Held-out proxies (3)	3×7	3×9	final evaluation	no
Calibration and analysis set	121*	332	σ_B, σ_P, τ and Section 5	σ_B, σ_P, τ
its part outside every proxy	100	269	error analysis (Section 5.3)	no
Baseline training set	105	9,047	outcome-only baselines	no

Each proxy has 7 benchmarks, 9 subject–benchmark pairs and at most 1,000 items. *Includes the 21 held-out benchmarks.

(b) One subject–benchmark pair

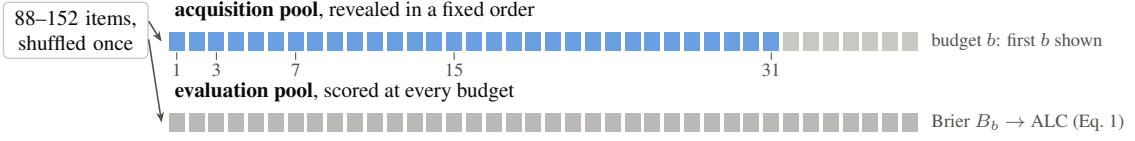

(c) The predictor

