
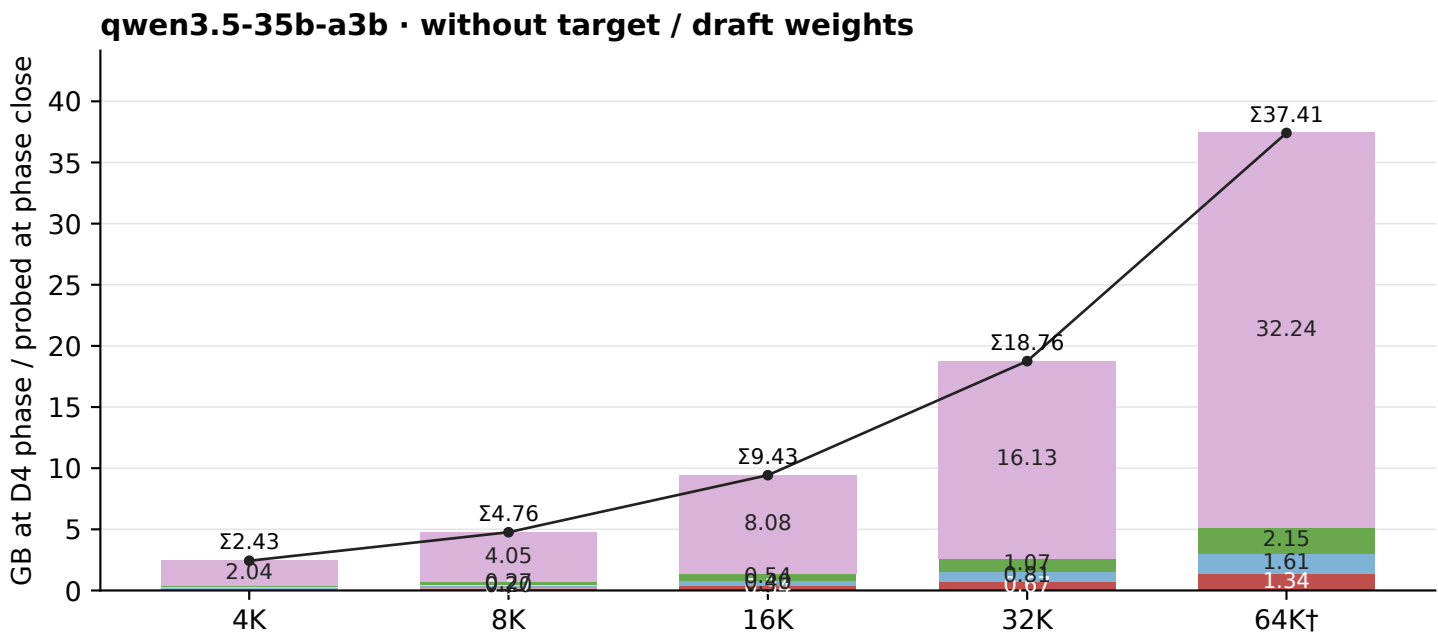
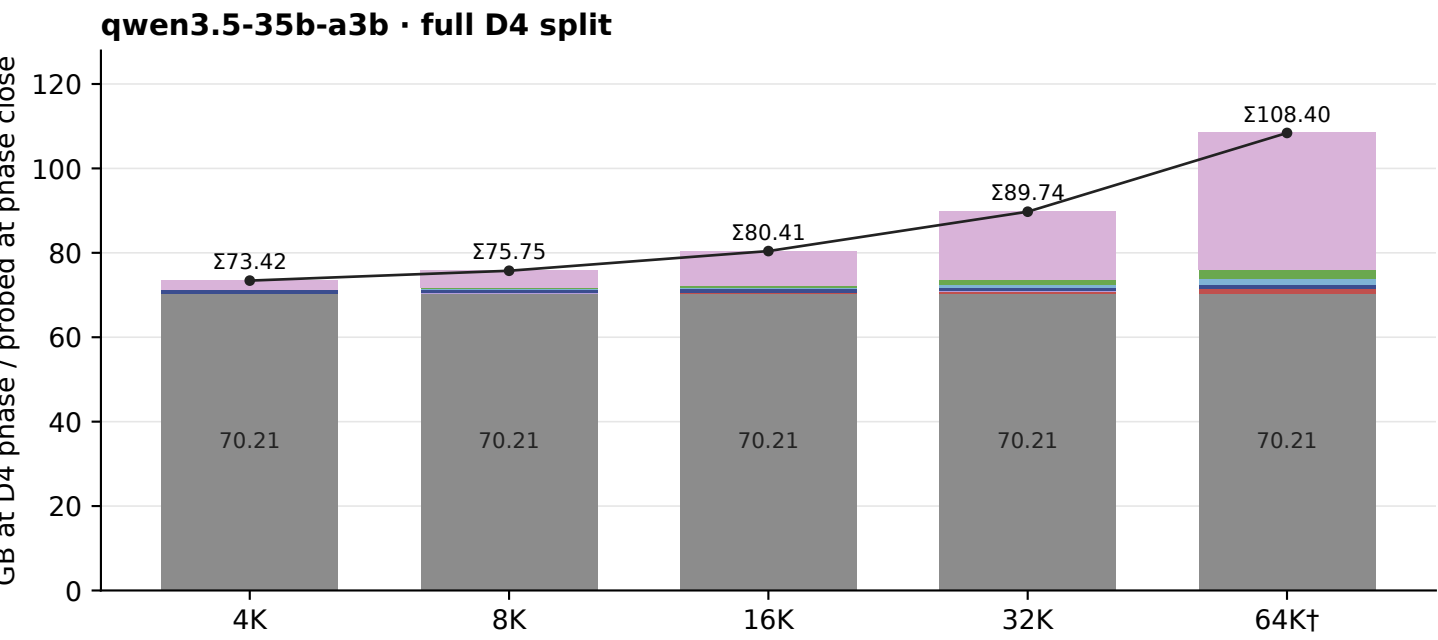
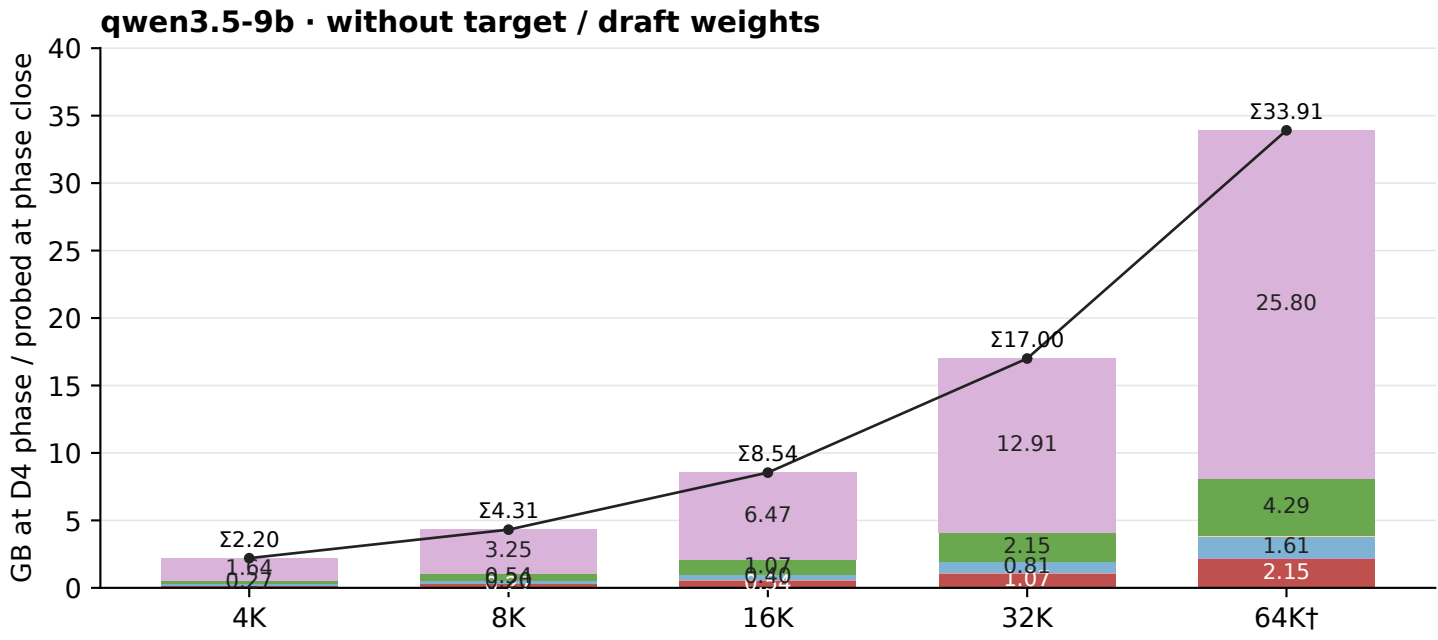
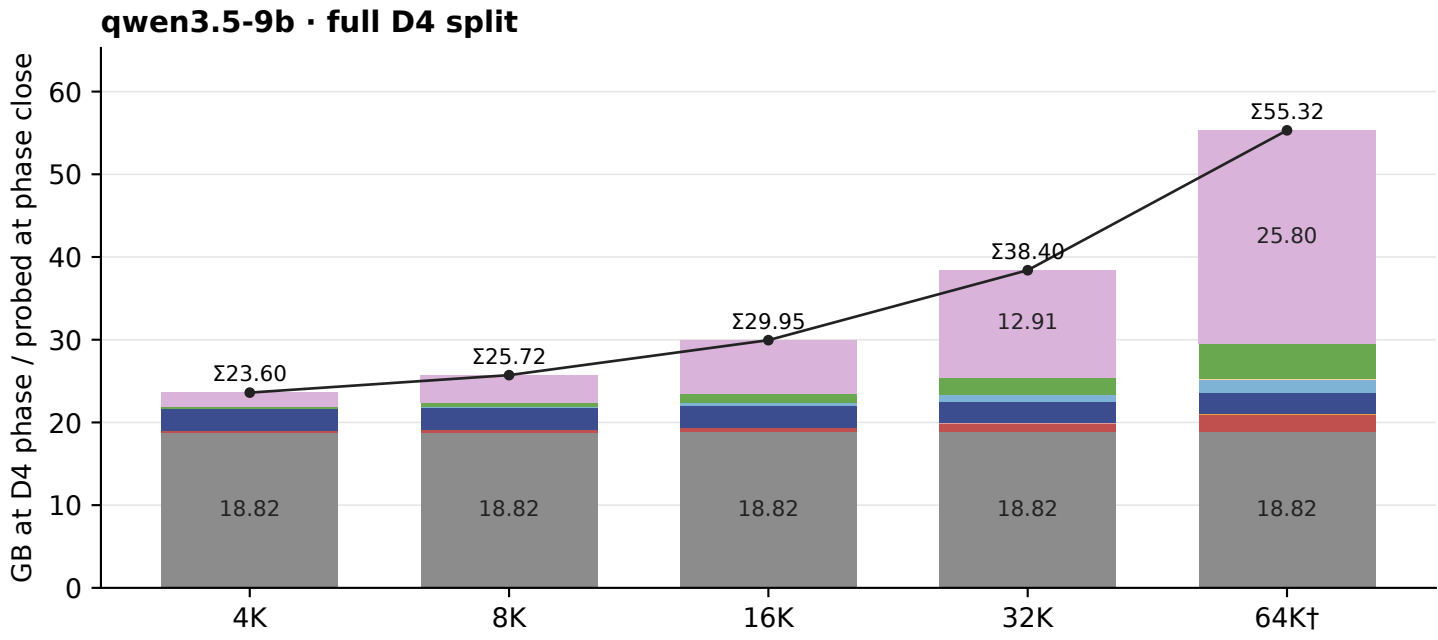
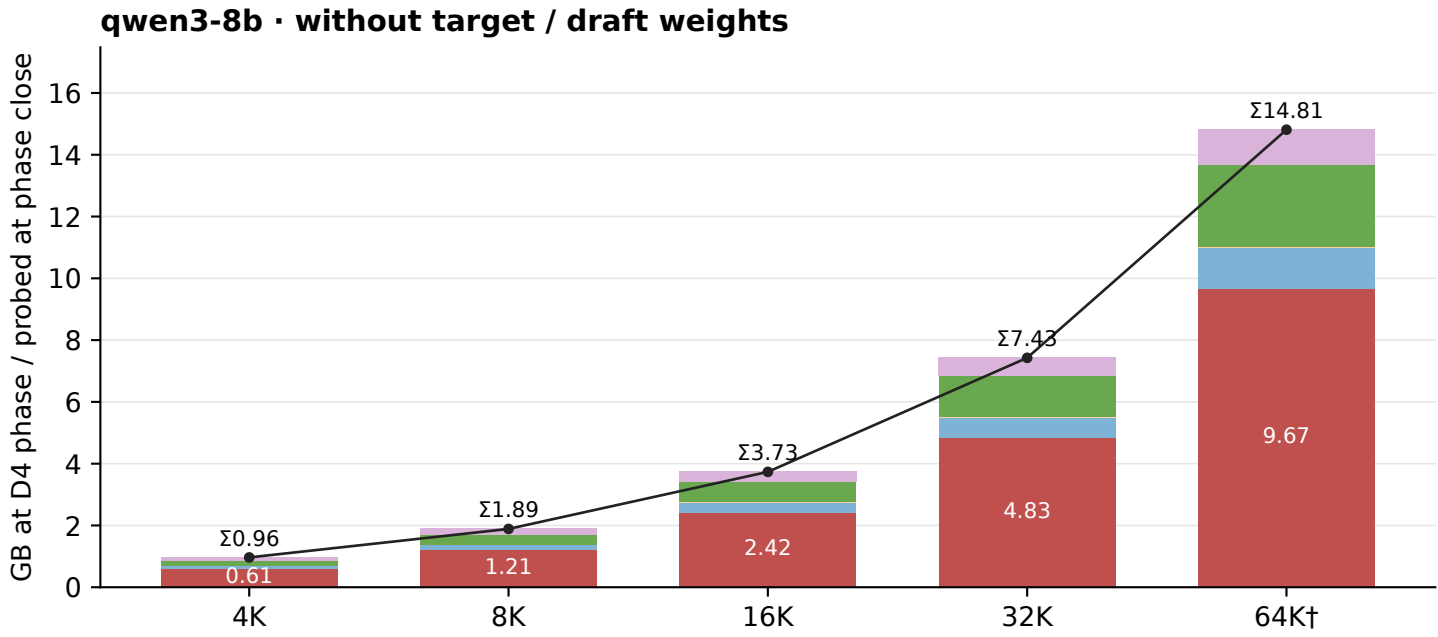


Split at D4 target verify: memory components across models and context lengths

- Target weights
- GDN conv working
- Draft KV
- Other cache
- Target attention KV
- GDN conv recording
- Selected hidden
- Peak minus probed components
- GDN recurrent
- Draft weights
- Context feature

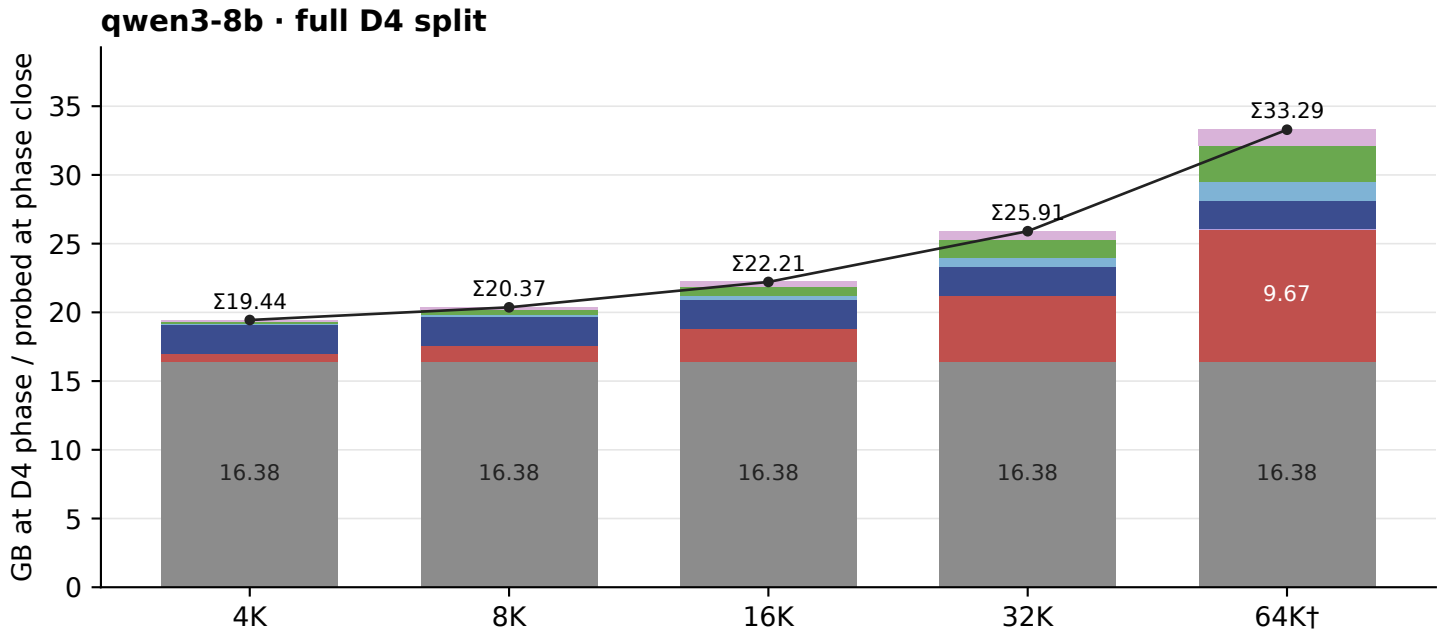

D4 memory: phase interval peak with components probed at its close; hatched gap can include storage already released.
All context lengths shown. Left: full footprint; right: remove resident target + draft weights to expose other costs.
Native AR has no D4/phase-memory component measurement, so no synthetic AR component stack is drawn.