

Leet Alert — product scope (PM / PO)

App: alert.theleetclub.com · Repo: `apps/alert-theleetclub-com/`

Refresh PDF: `npm run doc:pdf (commit md + figures/wire-*.svg + PRODUCT-PROTOTYPE.pdf)`.

Shipped UI has no “prototype” wording — wireframes are documentation only.

Routes & capabilities

Route	Area	What users get
<code>/</code>	Entry	Redirect to Home .
<code>/login</code>	Login	Google sign-in.
<code>/home</code>	Home	Cards: Red Flags → Overall → Admin (if role allows).
<code>/red-flags</code>	Red Flags	Red Alert snapshot; columns match <code>alert.theleetclub.com.xlsx</code> Red Flags row 1 (see <code>docs/alert-workbook-red-flags-tab.md</code>); trailing columns — until API wires workbook metrics; five timespan presets ; ~1 min refresh.
<code>/overall</code>	Overall	Workbook Overall sheet columns (see <code>docs/alert-workbook-overall-tab.md</code>); Admin-derived Operating Hours + Operator + snapshot Last Transaction; other workbook metrics show — until API wiring; ~1 min refresh.
<code>/admin</code>	Admin	User-entered data not on Vendon (schedules, cleaning, access). Machines (profiles, Vendon readout), Who can use Alert , My access , Advanced .

Permissions (summary)

people-api rules (same store as Monitor): view → Red Flags + Overall; **leetAlertAdmin** → Admin and edit **Who can use Alert** (same session rules API as Monitor **admin**); optional Monitor grid in **Advanced**. Adding people is limited to your Google Workspace domain(s): env `ACCESS_ALLOWED_EMAIL_DOMAINS` / `DASHBOARD_ACCESS_EMAIL_DOMAINS`, else the signed-in admin’s domain. No entitlements → **No access** after sign-in until an admin grants access.

Visual UI prototype (figures 0–4)

Aligned with current React shell (`App.tsx`), Home (“Choose a workspace”), and Admin vertical sections (`AdminPage.tsx`).

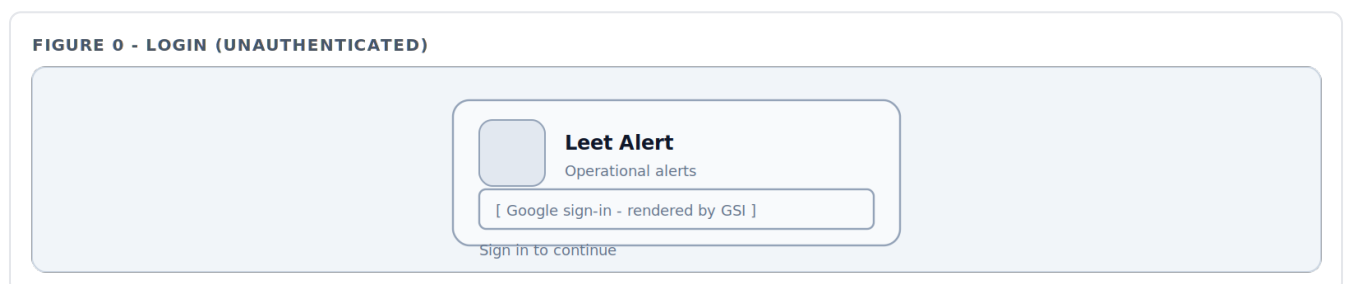


Figure 0 — Login

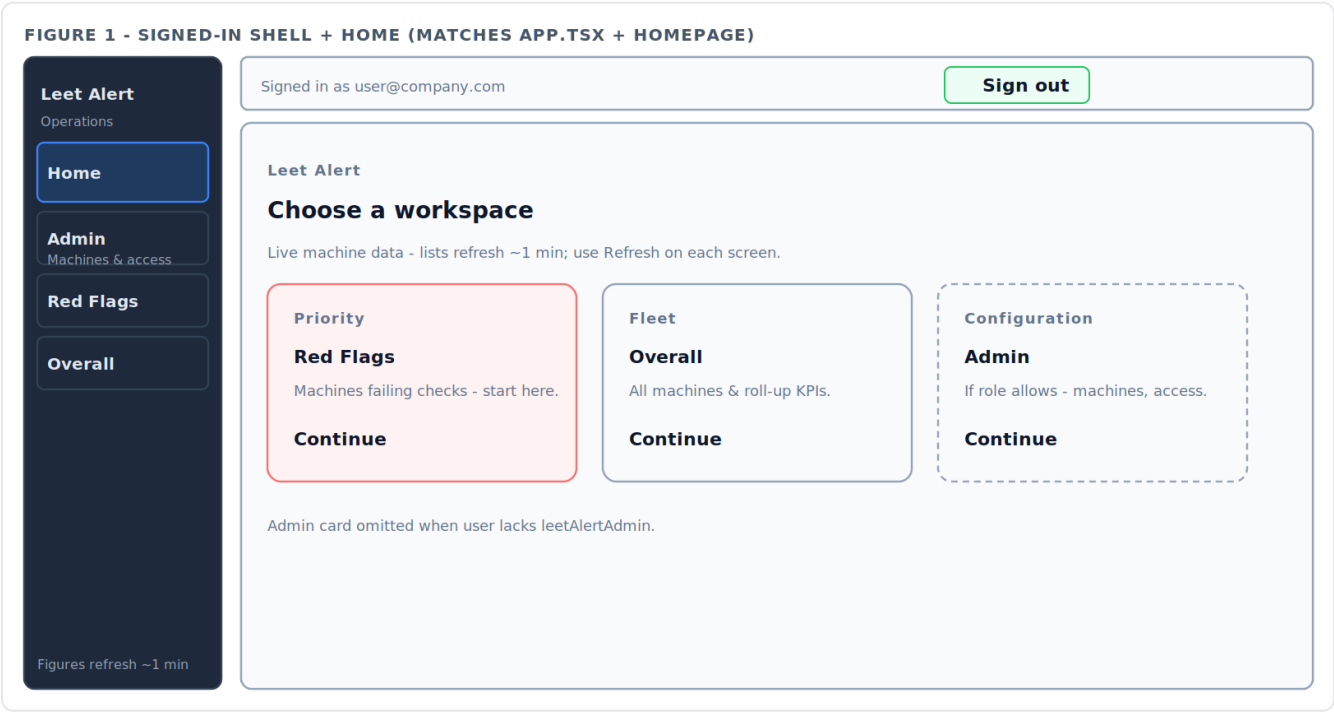


Figure 1 — Sidebar Operations; nav Home · Admin · Red Flags · Overall; Home hero + cards (Priority / Fleet / Configuration).

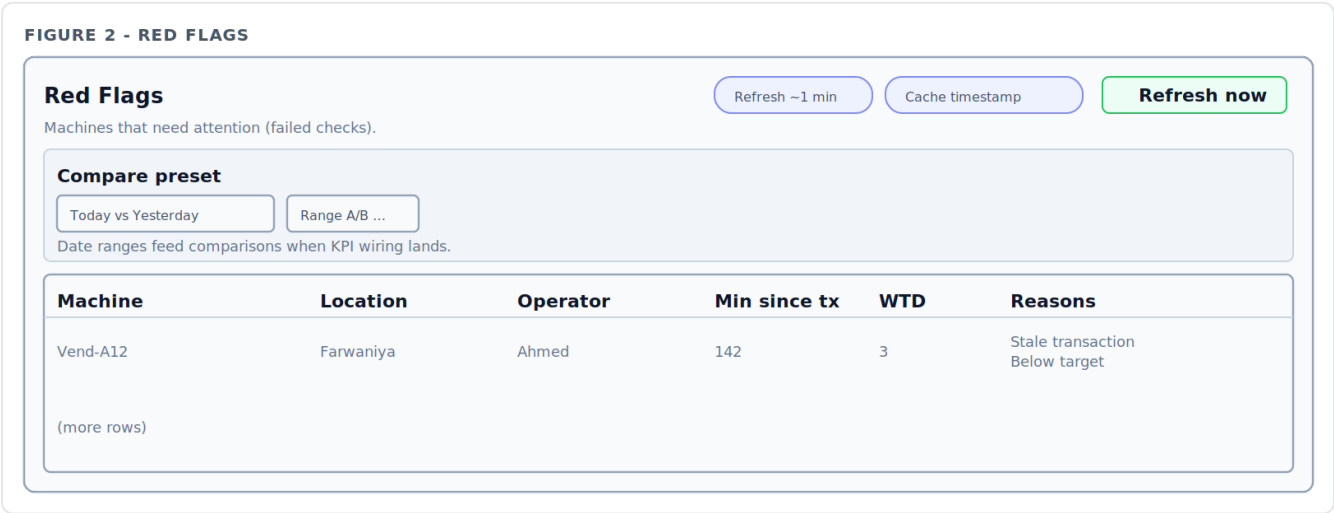


Figure 2 — Toolbar, compare preset, table.



Figure 3 — Same compare pattern; fleet table.

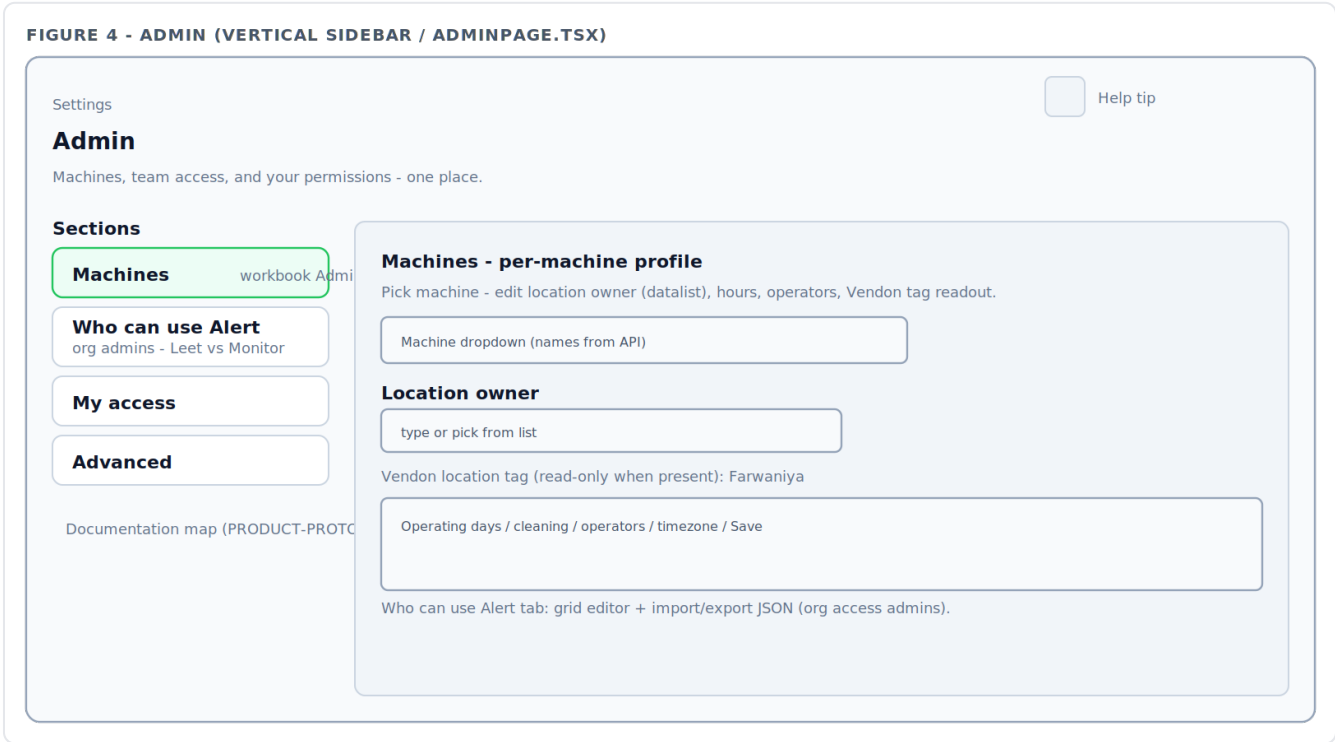


Figure 4 — Settings header; Sections sidebar (Machines active); Machines tab — machine picker, location owner datalist, Vendon tag.

Composite SVG (all panels): docs/product-prototype/visual-prototype.svg

PO quick facts

- Lists refetch ~1 min; **Refresh now** on each screen.
- Admin order: **Machines** → **Who can use Alert** → **My access** → **Advanced** (team tab only if org admin).

Changelog

Date (UTC)	Summary
2026-05-05	Admin → Location owner : Vendon prose / callInCode , split machine name on <code>\ / -</code> for fleet codes; no <code>/location</code> names in tag datalist; API validates tags only; UI does not prefill legacy DB site text — hint when Vendon has no tag.
2026-05-02	Who can use Alert — org email domain allowlist (server + UI); leetAlertAdmin can save access rules. Red Alert / machine location text prefers Vendon tags and machine tag fields before the generic Vendon <code>location</code> string (aligns with Admin “location owner” / machine tag).
2026-05-04	Red Flags = xlsx column order (through Tech Visit); <code>alert.theleetclub.com.xlsx</code> in repo; <code>redFlagsWorkbookColumns.ts</code> ; placeholders for columns not in snapshot; machine / alert split; Admin tag/priority (other row).
2026-05-02	Timespan presets (Today VS Yesterday default, +4) on Red Flags & Overall; Admin = data not on Vendon; five figure SVGs + PDF; Red Flags = Monitor Red Alert style.
2026-05-01	Who can use Alert steps; Machines vs workbook Admin; PO doc + PDF raster.

Date (UTC)	Summary
2026-04-30	Home hub; team access in Admin.