Report on AI Usage

General Information

- **Group ID:** 06
- **Class:** 25A01

AI Usage

- During the work on the Visualization Project, group members used AI agents to help with several tasks, mainly the UI and animation of their given data structures, sometimes there were also assistance to deal with git commits.
- AI agents we had used include ChatGPT.
- Below are some standard prompting we have been using:

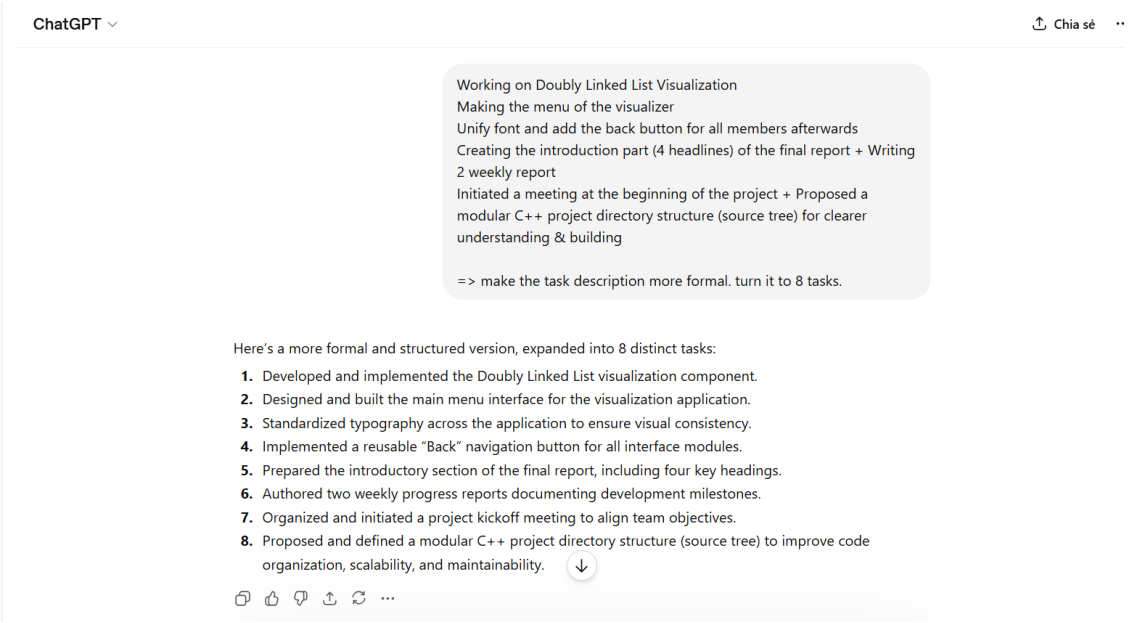

ChatGPT

Chia sẻ



Đã suy nghĩ trong 4s

Your CMake cache was created for a different project path, so Visual Studio is reusing stale build metadata.

The key errors in your screenshot are:

- `CMakeCache.txt directory ... is different than the directory ... where CMakeCache.txt was created`
- `The source ".../CS163_data_visualization/CMakeLists.txt" does not match the source ".../cs160/Project/CMakeLists.txt" used to generate cache`

That usually happens when you:

- copied/renamed a project folder,
- opened a different repo using an old `out/build/...` directory,
- or changed the toolchain/settings after the cache was created.

ChatGPT

Chia sẻ

i dont really know. first i pull main về máy xong t edit code của t và mn trên visual studio. giờ t k biết làm gì để mọi ng đều get this final version

Đã suy nghĩ trong vài giây

Nếu m **đã pull** `main` **về máy rồi sửa code ở local**, thì giờ cách an toàn nhất là:

Cách nên làm

1. Kiểm tra đang đứng ở branch nào

```bash
git branch
```

Nếu thấy dấu `*` ở `main` thì nghĩa là m đang sửa trực tiếp trên `main` local.

---

2. Tạo 1 branch mới từ đúng trạng thái hiện tại
Dù m đã sửa code rồi, vẫn tạo branch mới được:

```bash
git checkout -b ten-branch-cua-ban
```

Hỏi bất kỳ điều gì

ChatGPT có thể mắc lỗi. OpenAI không sử dụng dữ liệu không gian làm việc Plus để huấn luyện các mô hình của mình.

how to revert commit on git

Depends what you mean by "revert"—Git has a few *very different* ways to go back. I'll give you the right one based on situation 👇

🧠 1. Safest: Revert a commit (keeps history)

👉 Use this if you already pushed to GitHub

Bash

```bash
git revert <commit_hash>
```

```
}

void AVLRender::animation(float dt) {
    if (isPlaying) {
        render.stepTimer += dt;

        if (render.stepTimer >= render.stepDelay) {
            if (render.step < render.events.size()) {
                render.processEvent(render.events[render.step]);
                render.step++;
            }
            render.stepTimer = 0;
        }
    }
    updatePositions(dt);
}
```

this render is undefined btw

Yeah this one is a **scope / class confusion bug** — not a big deal, but easy to mess up 😉

🔥 FIX (simple)

❌ WRONG

C++

```cpp
render.stepTimer += dt;
render.step++;
render.processEvent(...)
```

✅ CORRECT

C++

```cpp
stepTimer += dt;
step++;
processEvent(events[step]);
```