

TaDa

API Manual

Revision history


Date	Version	Editor	Change log
2026/1/26	1.0.41	可琚	1. /auth (§4.2.2) Add maxBet parameter
2026/1/6	1.0.40	Vincent	1. Add GetUserFreeSpinRecord(§3.2.12)
2025/12/12	1.0.39	Peter	1. Update the descriptions of the offline payments (§4.2.4): there could be multiple offline payments for one trigger round.
2025/12/9	1.0.38	Joe	1. GetGameList adds a sorting parameter(§3.1.6)
2025/11/17	1.0.37	可琚	1. Adjust example parameters Appendix F – Testing Tools
2025/11/6	1.0.36	Vincent	1. Deprecate GetFreeSpinDashflow(§3.2.5)
2025/9/25	1.0.35	Vincent	1. Add CreateSpinBonus(§3.2.11)
2025/9/12	1.0.34	Vincent	1. Update Appendix C – Statement Types
2025/8/13	1.0.33	可琚	1. Add smResult for /bet(§4.2.3) and /sessionBet (§4.2.7)
2025/8/13	1.0.32	Vincent	1. FreeSpinData (§4.2.4) add skipRidReferenceId parameter
2025/8/8	1.0.31	Vincent	1. Remove Urdu in Appendix A – Language Codes
2025/8/5	1.0.30	Mark	1. GetBetRecordSummary add new response parameters(§3.1.4)
2025/5/7	1.0.29	Vincent	1. Modify GetFreeSpinSendDetail (§3.2.3) to version 2 2. Add GetGameBetList(§3.2.10) 3. FreeSpinData add new parameters(§4.2.4)
2025/2/24	1.0.28	Vincent	1. GetFreeSpinRecordByTime(§3.2.4) add ‘Type’ parameter 2. GetFreeSpinRecordByReferenceID (§3.2.6) add ‘Type’ parameter
2025/2/3	1.0.27	可琚	1. Add /singleWallet/LoginWithoutRedirect(§2.1.1) ErrorCode
2024/10/28	1.0.26	Tyler	1. Delete /singleWallet/Login API
2024/9/4	1.0.25	Tyler	1. Deprecation notice for the login API
2024/8/12	1.0.24	Tyler	1. Delete 3.1.9 /api1/GetUserBetRecordByTime 2. Adjust disableFullScreen parameter
2024/7/4	1.0.23	Tyler	1. /singleWallet/Login(§2.1.1), /singleWallet/LoginWithoutRedirect(§2.1.2): Add parameter to disable full screen mode 2. /api1/GetUserBetRecordByTime (§3.1.9): Change Account Require to Yes
2024/6/17	1.0.22	Peter	1. Update Appendix C – Statement Types
2024/5/10	1.0.21	Peter	1. Add balance formula for /bet (§4.2.3) and /cancelBet (§4.2.5) 2. Add more details of /sessionBet (§4.2.7)
2024/5/6	1.0.20	Tyler	1. Add GetUserBetRecordByTime (§3.1.9) 2. Update API method (use POST for all)

Index

Basic API Flow	5
0 Settings and precautions	6
1. API Protocols, Encryption and Decryption.....	7
1.1.1. Requests and Responses.....	7
1.1.2. Generate the Key	8
1.1.3. Samples of Key Generation	8
2. Enter the game	10
2.1.1. LoginWithoutRedirect.....	10
3. APIs	12
3.1.1. Kick member	12
3.1.2. Kick All Members (logout all members from one or all games)	12
3.1.3. Get url link of a game detail record	13
3.1.4. Get summary of bet records.....	14
3.1.5. Query single game record (deprecated)	17
3.1.6. Query game list.....	18
3.1.7. Query MustHitBy.....	20
3.1.8. Query member status	22
3.2. Free Spins	24
3.2.1. Give free spins to a member	25
3.2.2. Query overview of free spins.....	28
3.2.3. Query the detail of free spins were given	30
3.2.4. Query game records of free spins	33
3.2.5. Query free spin usage records(deprecated)	36
3.2.6. Query game records of FreeSpin by ReferenceID	38
3.2.7. Cancel the given rounds of free spin.....	40
3.2.8. Cancel the player' s rounds of free spin.....	42
3.2.9. Give free spins to multiple members	44
3.2.10. Query the bet amount for free spins.....	47
3.2.11. Give spin bonus to a member.....	49
3.2.12. Query Player Free Spin Usage Record.....	52
4. APIs Provided by the Operator	54
4.1. API Protocol and Authentication	54
4.1.1. Authentication (optional)	54
4.1.2. Response	54
4.2. APIs	55
4.2.1. Generate the Token.....	55
4.2.2. Player Authentication.....	56
4.2.3. Player Bet (place bet and settlement together).....	58
4.2.4. Special Bets	61

Offline payments	61
Free Spins.....	62
4.2.5. Cancel Bet (rollback the bet and settlement)	65
4.2.6. Resend Bet.....	67
4.2.7. Sessional Bet (place bet and settle separately).....	68
Turnover (effective bet amount)	74
Preserve (pre-deducted deposit amount).....	75
4.2.8. Cancel Sessional Bet (rollback the bet).....	77
Appendix A – Language Codes	79
Appendix B – Currency Codes	79
Appendix C – Statement Types	79
Appendix D – Game Categories	80
Appendix E – Extra Authentications	80
HTTP Basic Authentication	80
Offline mode (optional).....	82
Appendix F – Testing Tools.....	83
1. Query Samples	83
2. Actually calling the operator-provided API.....	89

Basic API Flow

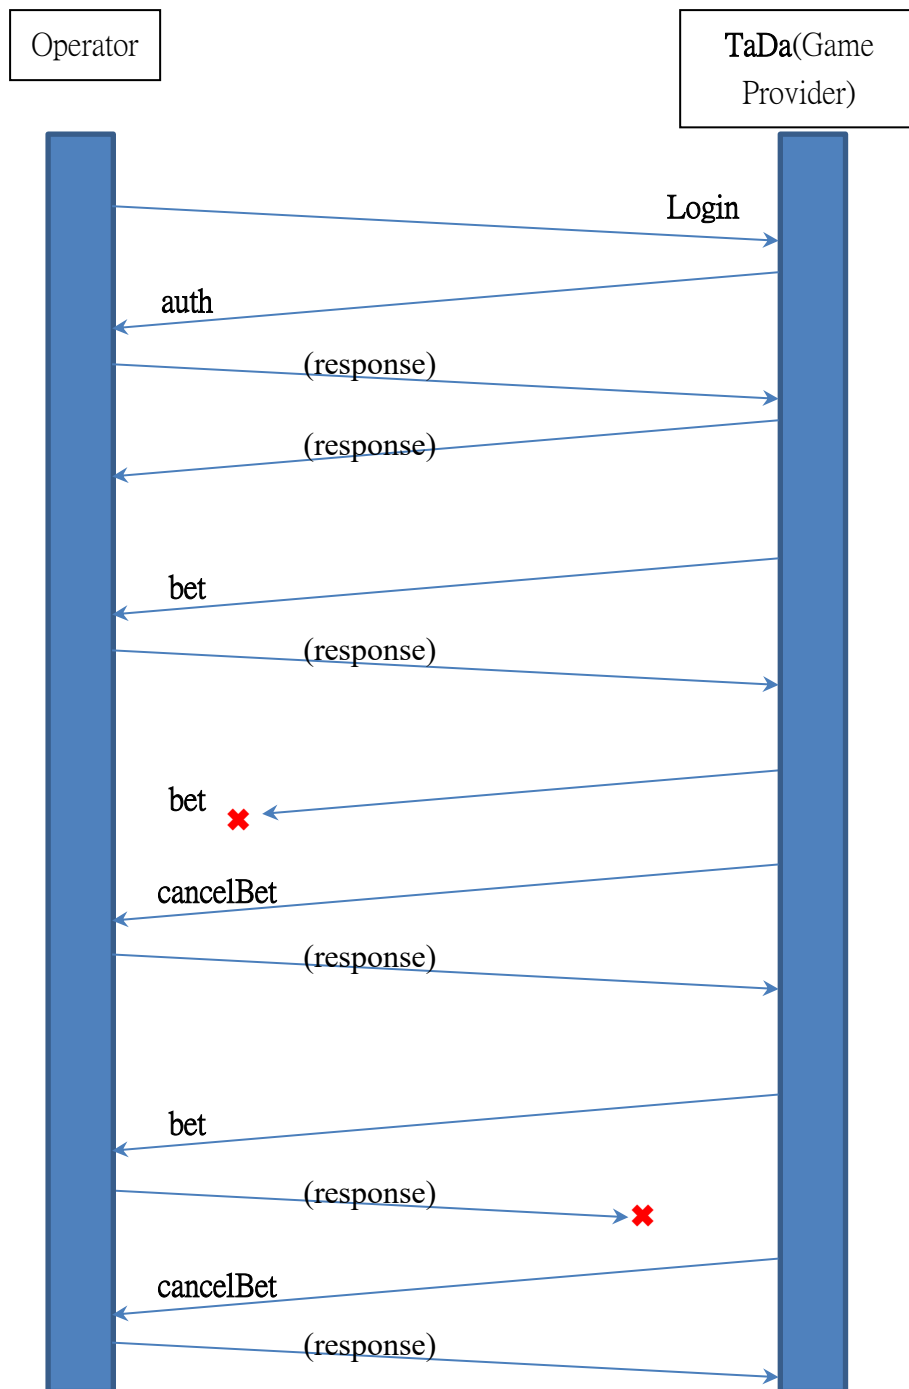

0 Settings and precautions

- Each AgentId represents an agent/client/site of the operator.
- Please contact the game provider to create AgentId. English alphabets, numbers and the underscore are allowed.
- **Duplicated member accounts are not allowed between different AgentIds if the same AgentKey is used. We suggest adding prefix to the member account.**

For example, if the agent WYZ_ABET has created i.e. Login (§2.1.1) a member *johndoetest123*, it is not allowed to create/Login another *johndoetest123* by another agent WYZ_ZBET.

- The game id will provider by our operating partner.
- The DB timezone use UTC +7.

Required Information.

- <api_url> operation API domain.(require)
- username verify account used for HTTP Basic Authentication (option)
- password verify password used for HTTP Basic Authentication(option)

1. API Protocols, Encryption and Decryption

1.1.1. Requests and Responses

Following parameters are required for all requests:

Parameter	Type	Description
AgentId	string	Unique ID of the agent
Key	string	Validation Key (see in §1.1.2)

If HTTP POST is used as the request, please use **x-www-form-urlencoded** to pass the parameters.

Each response contains following parameters:

Parameter	Type	Description
ErrorCode	string	Status code of the response
Message	string	Status description of the response
Data	Object	Response data

The response from the game provider is formatted as **JSON**.

1.1.2. Generate the Key

$$\text{Key} = \{ 6 \text{ any characters} \} + \text{MD5}(\text{All request parameters} + \text{KeyG}) + \{ 6 \text{ any characters} \}$$

- 6 any characters: Generated randomly, no necessary to be the same between the front and the rear, and will be ignored by the final verification algorithm.
- All request parameters : Concatenate API parameters by the format: key1=value1&key2=value2:
- Note: **always append AgentId=xxx** to the request parameter string
- Sample: Login (§2.1.1), Account, GameId, Lang, HomeUrl, Platform are listed; only Account, GameId, Lang are used to generate the key. Concentrate them by the order in [the table](#) and append AgentId, the result is
Account=Test1&GameId=101&Lang=zh-CN&AgentId=10081

$$\text{KeyG} = \text{MD5}(\text{DateTime.Now.ToString("yyMMd")} + \text{AgentId} + \text{AgentKey})$$

- DateTime.Now = **Current time (UTC-4)** and formatted as "yyMMd"
 - Year: the last two digits of Common Era
 - Month: two digits. For example, January is 01 and February is 02.
 - Day: one or two digits. Use 1~9 instead of 01~09.
- For example, if query at 2018/9/30 10:00 UTC+7:00 a.k.a. 2018/9/29 21:00 UTC-4:00, the date string is 180929.
- Note: the day part of the date should be one-digit if it is less than 10
Sameple : 2018/2/7 => 18027 (use 7 instead of 07)
2018/2/18 => 180218

1.1.3. Samples of Key Generation

Note: The AgentId "Chaiyo_1" is just a sample. Please confirm with the Game Provider for actual AgentId.

- Case 1: The generation of KeyG

Name	Value
AgentKey	be8e08f95357d215921f91c6a533f74d3194de52
AgentId	abcd_RMB
Encryption time	2019/01/01

```
string now = DateTime.Now.ToString("yyMMd");    // 2019/01/01 => "19011"
string agentId = "abcd_RMB";
string agentKey = "be8e08f95357d215921f91c6a533f74d3194de52";
string keyG = MD5(now + agentId + agentKey);
```


KeyG

= MD5("19011abcd_RMBbe8e08f95357d215921f91c6a533f74d3194de52")

= 9424ffdd6de016a5f90a97a55d99c717

- Case 2: Login.api

Name	Value
Account	Test006
GameId	1
Lang	zh-CN

```
string keyG = "9424ffdd6de016a5f90a97a55d99c717"
string querystring = "Token=Test006&GameId=1&Lang=zh-CN&AgentId=abcd_RMB";
string md5string = MD5(queryString + keyG);

string randomText1 = "123456";    // Random
string randomText2 = "abcdef";    // Random

string key = randomText1 + md5string + randomText2;
```

md5string

= MD5("Token=Test006&GameId=1&Lang=zh-CN&AgentId=abcd_RMB9424ffdd6de016a5f90a97a55d99c717")

= 3e4c3b321eac16f20633f683be08d237

Key = "1234563e4c3b321eac16f20633f683be08d237abcdef"

Name	Result
md5string	3e4c3b321eac16f20633f683be08d237
Key	1234563e4c3b321eac16f20633f683be08d237abcdef
LoginUrl	<API URL>/Login?Token=Test006&GameId=1&Lang=zh-CN&AgentId=abcd_RMB &Key=1234563e4c3b321eac16f20633f683be08d237abcdef

2. Enter the game

2.1.1. LoginWithoutRedirect

URL	<API URL>/singleWallet/LoginWithoutRedirect	Method	POST	Return	JSON
Description	Guide members into the game.(response launch game url)				

Request:

Parameter	Type	Require	Description
Token	string	Yes	Api access token From site (800 characters at most)
GameId	int	Yes	Game unique identification value (see the game list)
Lang	string	Yes	UI language (see Appendix A)
HomeUrl	string	No	The URL redirect to after the player logout a game Ignored when generating the key.
Platform	string	No	Platform information. See §4.2.3 and §4.2.7. Ignored when generating the key.
disableFullScreen	int	No	When disableFullScreen is set to 1, full screen mode will be disabled. Ignored when generating the key.

The token is generated by the operator and used for the queries to the game provider. The Login API will validate and return the account of the member. The account will be created of the member's first time login.

Response:

Parameter	Type	Require	Description
Data	string	Yes	Web link to enter the game P.S. This link is encoded by JSON, please use JSON decoding to extract it. This link can be used only once.

Error code:

Error Code	Message	Description
2	Invalid Key	Key auth failed (see §1.1.2)
9	api auth fail	Token verify failed when calling the operator's 'auth'
9	Site master not found	Invalid AgentId (see Chapter 0)
9	Site master mismatched	Player account mismatches to AgentId (see Chapter 0)

104	invalid currency from auth	The operator returns an invalid currency in the auth
-----	----------------------------	--

Sample of the request

```
/singleWallet/LoginWithoutRedirect
```

```
Token=Test001&GameId=1&Lang=en-US&AgentId=abcd_THB&Key=000000b7caea5de85c5e829bc88b56e15cd6fa000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "success",
  "Data": "https://www.xxxxx.com/fish/index.html?ssoKey=e79576885ebfc13084bf46a2e2930b121f31ff37\u0026lang=en-US\u0026gameID=1"
}
```

3. APIs

3.1.1. Kick member

URL	<API URL>/api1/KickMember	Method	POST	Return	JSON
Description	Kick the specific member,				

Request:

Parameter	Type	Require	Description
Account	string	Yes	Unique account name

Error code:

Error Code	Message	Description
0	Success	success
101	Invalid Member	Member not existed/not online

3.1.2. Kick All Members (logout all members from one or all games)

URL	<API URL>/KickMemberAll	Method	POST	Return	JSON
Description	Logout all members from the game forcibly.				

Request:

Parameter	Type	Require	Description
GameId	int	No	Member unique identification value.

Error code:

Error Code	Message	Description
0	Success	Logout successful

Sample QueryString :

```
//Logout all members
```

```
AgentId=Chaiyo_1
```

```
//Logout all members in game id = 1
```

```
GameId=1&AgentId=Chaiyo_1
```

3.1.3. Get url link of a game detail record

URL	<API URL>/GetGameDetailUrl	Method	POST	Return	JSON
Description	Get url link of a game detail record. P.S. This link is one-off and cannot be accessed again.				

Request:

Parameter	Type	Require	Description
WagersId	bigint	Yes	Game record unique id.
Lang	string	No	Language used for the web page to show the detail record. Following can be used: zh-CN, zh-TW, en-US, th-TH, id-ID, vi-VN If this parameter is not given or cannot be recognized, "th-TH" will be used.

Note: please ignore Lang when generating the key.

Response:

Parameter	Type	Require	Description
Url	string	Yes	The url link of the game detail record.

Error code:

Error Code	Message	Description
0	Success	Success
101	Record Not Exist	Game record not exist

Sample of the request

```
/GetGameDetailUrl
```

```
WagersId=987654321&AgentId=abcd_THB&Key=00000027521e5e5f46acb9ad81c129d7f4dd2e000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "success",
  "Data": {
    "Url": "https://www.xxxxx.com/en-US/ingame/gamehistory?token=0adf022bc84b549db4a201b8a7bbc2280aaeea41\u0026ri=987654321\u0026li=987654321"
  }
}
```

3.1.4. Get summary of bet records

URL	<API URL>/GetBetRecordSummary	Method	POST	Return	JSON
Description	Get summary of bet records by specific time range				

Request:

Parameter	Type	Require	Description
StartTime	DateTime	Yes	Start time
EndTime	DateTime	Yes	End time
GameId	int	No	Game unique id. If not given, summary of all games will be returned. P.S. please ignore when generating the key.
Currency	string	No	Currency code. If not given, summary BY each currency will be returned. P.S. please ignore when generating the key.
FilterAgent	bool	No	Filter records which not belong to the agent If not given, summary of all agents will be returned. P.S. please ignore when generating the key.
GroupByGame	int	No	Group the query results by game. 0 or not given = not group by game 1 = group by game P.S. please ignore when generating the key

Response:

Parameter	Type	Require	Description
BetAmount	decimal(16,4)	Yes	Bet Amount
PayoffAmount	decimal(16,4)	Yes	Payoff Amount
Turnover	decimal(16,4)	Yes	Turnover Amount
Preserve	decimal(16,4)	Yes	Preserve Amount
WagersCount	int	Yes	Bet record count
Currency	string	Yes	Currency code
GameId	int	No	Game unique id. Only used for GroupByGame=1.

Error code:

Error Code	Message	Description
0	Success	Success

2	Invalid Key	Invalid key
101	Invalid DateTime	Invalid time format or start time > end time.
4	(other failures)	Other failures

Sample : Please refer to the following time format

`StartTime = '2020-09-02T00:00:00';`

`EndTime = '2020-09-02T23:59:59';`

Response samples:

1. Summarize all games (GroupByGame = 0)

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": [
    {
      "BetAmount": 3002.5,
      "PayoffAmount": 1.95,
      "Turnover": 3002.5,
      "Preserve": 0,
      "WagersCount": 6,
      "Currency": "THB",
    }
  ]
}
```

2. Count by games

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": [
    {
      "BetAmount": 2.5,
      "PayoffAmount": 1.95,
      "Turnover": 2.5,
      "Preserve": 0,
      "WagersCount": 5,
      "Currency": "THB",
      "GameId": 108
    },
    {
      "BetAmount": 3000,

```

```
        "PayoffAmount": 0,  
        "Turnover": 3000,  
        "Preserve": 0,  
        "WagersCount": 1,  
        "Currency": "THB",  
        "GameId": 182  
    }  
]  
}
```


3.1.5. Query single game record (deprecated)

URL	<API URL>/GetBetRecordByUuid	Method	POST	Return	JSON
Description	Querying single bet record by uuid.				

Request:

Parameter	Type	Require	Description
WagersId	bigint	Yes	Game record unique id.

Response:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id.
WagersId	bigint	Yes	Game record unique id.
GameId	int	Yes	Game unique id.
WagersTime	DateTime	Yes	Bet time.
BetAmount	decimal(16,4)	Yes	Bet amount.
PayoffTime	DateTime	No	Payoff time.
PayoffAmount	decimal(16,4)	No	Payoff amount.
Status	int	Yes	Bet Status: 1: Win 2: Lose
SettlementTime	DateTime	Yes	Settlement time.
GameCategoryId	int	Yes	Game type: Refer to Chapter 3.1.6
Type	Int	Yes	Statement type: 1: main game 9: free game 11:Reward card
AgentId	string	Yes	Agent unique id
RoundIndex	bigint	No	RoundIndex of free games of “War Of Dragons” and “King Kong”

Error code:

Error Code	Message	Description
0	Success	Success
101	Record Not Exist	Game record not exist

3.1.6. Query game list

URL	<API URL>/GetGameList	Method	POST	Return	JSON
Description	Query the information of all games including GameId, name, type, etc.				

Response:

Parameter	Type	Require	Description
GameId	string	Yes	Game unique id
Name	object	Yes	zh-CN : The name of Simplified Chinese zh-TW : The name of Traditional Chinese. en-US : The name of English.
GameCategoryId	int	Yes	Game type : see Appendix D
JP	boolean	Yes	true: this game has in-game JP false: no in-game JP
Freespin	boolean	Yes	True as this game supports free spins (§3.2); False otherwise.
Sorting	int	No	Game page display sorting order

Sample of the request

```
/GetGameList
```

```
AgentId=abcd_THB&Key=0000006b5536a736536e46080b3df80f5cc7aa000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "success",
  "Data": [
    {
      "GameId": 1,
      "name": {
        "en-US": "Royal Fishing",
        "zh-CN": "钱龙捕鱼",
        "zh-TW": "錢龍捕魚"
      },
      "GameCategoryId": 5,
      "JP": false,
      "Freespin": false
    }
  ]
}
```

```

        "Sorting": 1
    },
    {
        "GameId": 2,
        "name": {
            "en-US": "Chin Shi Huang",
            "zh-CN": "秦皇传说",
            "zh-TW": "秦皇傳說"
        },
        "GameCategoryId": 1,
        "JP": false,
        "Freespin": true
    },
    {
        "GameId": 4,
        "name": {
            "en-US": "God Of Martial",
            "zh-CN": "关云长",
            "zh-TW": "關雲長"
        },
        "GameCategoryId": 1,
        "JP": false,
        "Freespin": false
    }
]
}

```

3.1.7. Query MustHitBy

URL	<API URL> /GetMustHitBy	Method	POST	Return	JSON
Description	Query information of 'MustHitBy'				

Request:

Parameter	Type	Require	Description
GameId	Int	No	Game unique id. If not given, return information of all games. P.S. please ignore when generating the key.

Response:

Parameter	Type	Require	Description
Currency	String	Yes	Currency code
Game	String	Yes	Game name
GameId	Int	Yes	Game unique id
MustHitByPool	Decimal	Yes	Current pool value of MustHitBy
MustHitByValue	Decimal	Yes	Goal value of MustHitBy

Error code:

Error Code	Message	Description
0	Success	Success
9	Execution Error	Execution Error
101	Record Not Exist	Record Not Exist

Sample of the request

```
/GetMustHitBy
```

```
AgentId=abcd_THB&Key=000000eb51beeeab91421619241e4d9e6f79a2000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "success",
  "Data": [
    {
      "Currency": "THB",
```

```

        "Game": "CrazySeven",
        "GameId": 35,
        "MustHitByPool": 2459.8625,
        "MustHitByValue": 3000
    },
    {
        "Currency ": "THB",
        "Game": "Bao boon chin",
        "GameId": 36,
        "MustHitByPool ": 2413.6871,
        "MustHitByValue ": 3000
    },
    {
        "Currency ": "THB",
        "Game": "Dragon Treasure",
        "GameId": 46,
        "MustHitByPool": 3000,
        "MustHitByValue": 3000
    },
    {
        "Currency ": "THB",
        "Game": "SuperAce",
        "GameId": 49,
        "MustHitByPool": 2937.4401,
        "MustHitByValue": 3000
    }
]
}

```

3.1.8. Query member status

URL	<API URL>/GetMemberInfo	Method	POST	Return	JSON
Description	Check current status of a member including account, usable credits and other information.				

Request:

Parameter	Type	Require	Description
Accounts	string	Yes	Member unique identification value. Optional. Two different mode as following: - Multiple accounts: separated by commas - Single account.

Response:

Parameter	Type	Require	Description
Account	string	Yes	Member unique identification value.
Balance	Decimal(16,4)	Yes	Member wallet balance (0 if the account does not exist)*
Status	int	Yes	status : 1: online 2: offline 3: account does not exist.

* The wallet balance returned is not real-time. There is a few seconds of delay.

Sample of QueryString:

//Query single user

Accounts=Test001&AgentId=abcd_RMB

//Multi-users : Separate with commas

Accounts=Test001,Test002&AgentId=abcd_RMB

Sample of the request

/GetMemberInfo

Accounts=Test001&AgentId=abcd_THB&Key=000000446c647a1b506110747564e7a416efeb000000

Sample of the response body

```
{  
    "ErrorCode": 0,  
}
```

```
"Message": "success",
"Data": [
  {
    "Account": "Test001",
    "Balance": 260.03,
    "Status": 2
  }
]
```

3.2. Free Spins

“Free spins” (also known as “free games”, “free rounds”) contains several concepts that are easy to confuse, which are listed as follows:

➤ Bonus games

Players may randomly get a number of free spins in the regular game. No matter how many spins the player gets, all the payout amounts of the free spins will be combined with the bet amount and payout amount of the regular game that triggered the free spins into a single bet request. This bet request has no difference from a bet request of a regular game, including the endpoint and format. Please refer to §4.2.3.

The above description does not apply to WAR OF DRAGONS (game ID = 9) 和 MEDUSA (game ID = 101).

➤ Bonus games of WAR OF DRAGONS (game ID = 9) 和 MEDUSA (game ID = 101)

The bonus games of these two games are different from other games. There will be cases of multiple bet requests. The format of the bet request is also slightly different from the regular game, please refer to §4.2.4 [Offline payments](#).

➤ Item card

Players have a chance to get item cards in the game. When used, they will cost some amount and get a number of free spins. No matter how many spins the player gets, all the payout amounts will be combined with the bet amount (the cost) into a single bet request. This request has the same format and endpoint as the regular game, but has a different **statementType**. Please refer to §4.2.3 and [Appendix C – Statement Types](#).

➤ Buy bonus

Some games allow players to buy bonus games. After purchasing, they can get a number of free spins. Similar to item cards, no matter how many spins the player gets, all the payout amounts will be combined with the purchase cost into a single bet request. This request has the same format and endpoint as the regular game, but has a different **statementType**. Please refer to §4.2.3 and [Appendix C – Statement Types](#).

➤ Free Spins

The operators are allowed to give free spins to players. The rounds of free spins are used first when the player enters the game. For more details, please refer to §4.2.4 [Free Spins](#).

The free spins described in this chapter are the last of the above, that is, the free spins that are given to players by the operators.

3.2.1. Give free spins to a member

URL	<API URL> /CreateFreeSpin	Method	POST	Return	JSON
Description	Give free spin rounds to a specified member				

Request:

Parameter	Type	Require	Description
Account	String	Yes	Member account.
Currency	String	Yes	Currency used by the member.
ReferenceId	String	Yes	Unique identifier of the free spins given by this request (50 characters at most).
FreeSpinValidity	Date	Yes	The date when the given free spins are expired (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05) The validity period shall not exceed 31 days from the start time
NumberOfRounds	Int	Yes	Count of the given free spins.
GameIds	String	Yes	IDs of games for the given free spins. Comma separated if more than one. (200 characters including commas at most)
BetValue	Double	No	The betting value for the player to use for the free spins. Minimum bet value is used if this parameter is not given. P.S. please ignore when generating the key.
StartTime	String	No	The date when the given free spins can be used (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05) If not given, the given free spins can be used immediately. P.S. please ignore when generating the key.
AllowStop	Bool	No	Whether the free spins can be aborted before completion. P.S. please ignore when generating the key.
MaxWin	Double	No	Maximum accumulated winning limit If not specified, there is no upper limit. P.S. please ignore when generating the key.

Response:

Parameter	Type	Require	Description
CreateTime	Bigint	Yes	Timestamp

Error code:

Error Code	Message	Description
0	Success	Success
9	Execution Error	Server error
101	Invalid Date Time	Format of FreeSpinValidity is not correct
101	Incorrect NumberOfRounds	NumberOfRounds is not a valid number
101	Incorrect GameIds	Some of id(s) in GameIds is invalid or does not support free spins
101	Too many GameIds	GameIds is longer than 200 characters
101	Empty ReferenceId	Empty ReferencedId
101	ReferenceId too long	ReferencedId is longer than 50 characters
101	Invalid bet value	BetValue is not a valid value
102	ReferenceId Exist	ReferencedId is used
104	Currency Not Exist	The game provider does not support this currency

Sample of the request 1 (json)

```
/CreateFreeSpin

{
  "Account": "test01",
  "Currency": "THB",
  "ReferenceId": "freespintest0001",
  "FreeSpinValidity": "2023-01-01T12:00:00",
  "NumberOfRounds": 10,
  "GameIds": "108,110"
}
```

Sample of the request 2 (form-urlencoded)

```
/CreateFreeSpin

Account=test01&Currency=THB&ReferenceId=freespintest0001&FreeSpinValidity=2023-01-01T12:00:00&NumberOfRounds=10&GameIds=108,110&AgentId=abcd_THB&Key=0000006e5fd5af6b15cce4e668c3e47de5f591000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "success",
}
```

```
"CreateTime": 1659693600  
}
```

3.2.2. Query overview of free spins

URL	<API URL> /GetFreeSpinRecordSummary	Method	POST	Return	JSON
Description	Get summary of bet and send and used records by specific time range				

Request:

Parameter	Type	Require	Description
StartTime	DateTime	Yes	Start time
EndTime	DateTime	Yes	End time
Currency	string	No	Currency code. If not given, summary BY each currency will be returned. P.S. please ignore when generating the key.
FilterAgent	bool	No	Filter records which not belong to the agent If not given, summary of all agents will be returned. P.S. please ignore when generating the key.

Response-Result:

Parameter	Type	Require	Description
BetAmount	decimal(16,4)	Yes	Bet Amount (must be 0)
PayoffAmount	decimal(16,4)	Yes	Payoff Amount
WagersCount	int	Yes	Bet record count
Currency	string	Yes	Currency code
WinlossAmount	decimal(16,4)	Yes	Payoff-bet amount difference

Response-Overview:

Parameter	Type	Require	Description
TotalSend	int	Yes	Number of free spins were given
TotalUsed	int	Yes	Number of free spins were used
TotalUnused	int	Yes	Number of free spins were unused

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid key
101	Invalid DateTime	Invalid time format or start time > end time.
4	(other failures)	Other failures

Sample of the request

```
/GetFreeSpinRecordSummary
```

```
StartTime=2023-05-02T00:00:00&EndTime=2023-05-03T00:00:00&AgentId=abcd_THB&Key=000000517e5966d1e97e99fec757e71d61add3000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": {
    "Result": [
      {
        "BetAmount": 0,
        "PayoffAmount": 0.2,
        "WagersCount": 2,
        "Currency": "USD",
        "WinlossAmount": 0
      },
      {
        "BetAmount": 0,
        "PayoffAmount": 0.2,
        "WagersCount": 4,
        "Currency": "THB",
        "WinlossAmount": -3.8
      }
    ],
    "Overview": {
      "TotalSend": 20,
      "TotalUsed": 6,
      "TotalUnused": 14
    }
  }
}
```

3.2.3. Query the detail of free spins were given

URL	<API URL> /GetFreeSpinSendDetail2	Method	POST	Return	JSON
Description	Get the detail of free spins were given by specific time range				

Request:

Parameter	Type	Require	Description
StartTime	DateTime	Yes	Start time
EndTime	DateTime	Yes	End time
Page	int	Yes	Page(start from 1)
PageLimit	int	Yes	Number of transaction record per page. Must not more than 25,000 and not less than 10000.

Response-Result:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id
ReferenceID	string	Yes	Free spin given id
SendAmount	int	Yes	Number of given free spins
SendTime	DateTime	Yes	Time of given free spins
ExpiredTime	DateTime	Yes	Expired time of free spins
UpdateTime	DateTime	Yes	Last updated time for free spins
SendGame	string	Yes	Games of given free spins
UsedAmount	int	Yes	Number of used free spins
UnusedAmount	int	Yes	Number of unused free spins
ClaimGame	int	Yes	Claim game of free spins (0: not claimed to any game)

Response-Pagination:

Element	Type	Require	Description
CurrentPage	int	Yes	Current page.
TotalPages	int	Yes	Total pages.
PageLimit	int	Yes	Number of transaction record per page.
TotalNumber	int	Yes	Total transaction amount.

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid key

101	Invalid DateTime	Invalid time format or start time > end time.
4	(other failures)	Other failures

Sample of the request

/GetFreeSpinSendDetail2

StartTime=2023-05-02T00:00:00&EndTime=2023-05-03T00:00:00&Page=1&PageLimit=25000&AgentId=abcd_THB&Key=000000517e5966d1e97e99fec757e71d61add3000000

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": {
    "Result": [
      {
        "Account": "test001_THB",
        "ReferenceID": "1683016002999",
        "SendAmount": 10,
        "SendTime": "2023-05-02T04:27:10-04:00",
        "ExpiredTime": "2023-06-01T00:00:00-04:00",
        "UpdateTime": "2023-05-04T08:00:00-04:00",
        "SendGame": "134",
        "UsedAmount": 4,
        "UnusedAmount": 6,
        "ClaimGame": 134
      },
      {
        "Account": "test001_USD",
        "ReferenceID": "1683016170598",
        "SendAmount": 10,
        "SendTime": "2023-05-02T04:29:32-04:00",
        "ExpiredTime": "2023-06-01T00:00:00-04:00",
        "UpdateTime": "2023-05-05T09:10:00-04:00",
        "SendGame": "77,78",
        "UsedAmount": 2,
        "UnusedAmount": 8,
        "ClaimGame": 78
      }
    ]
  }
}
```

```
        }
    ],
    "Pagination":{
        "CurrentPage":1,
        "TotalPages":1,
        "PageLimit":25000,
        "TotalNumber":2
    }
}
```


3.2.4. Query game records of free spins

URL	<API URL> /GetFreeSpinRecordByTime	Method	POST	Return	JSON
Description	Get free spins game records by specific time range				

Request:

Parameter	Type	Require	Description
StartTime	DateTime	Yes	Start time. Format: YYYY-MM-DDThh:mm:ss such as 2021-01-01T03:00:00. GMT-4 should be used.
EndTime	DateTime	Yes	End time. Format: the same as StartTime. P.S. Bet records could possibly be delayed. Please DO NOT use current time as EndTime. Using the time 5 to 10 minutes ago is recommended.
Page	int	Yes	Page(start from 1)
PageLimit	int	Yes	Number of transaction record per page. Must not more than 20,000 and not less than 10000.
GameId	int	No	Game unique id. P.S. please ignore when generating the key.
FilterAgent	int	No	Filter records which not belong to the agent If not given, summary of all agents will be returned. P.S. please ignore when generating the key.

Response-Result:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id
GameId	int	Yes	Game unique id
WagersId	bigint	Yes	Game record unique id
BetAmount	decimal(16,4)	Yes	Bet Amount.*
PayoffAmount	decimal(16,4)	Yes	Payoff Amount
WagersTime	DateTime	Yes	Bet Time
Currency	int	Yes	Currency code
ReferenceId	string	Yes	Free spin given id
Type	int	Yes	Statement type: 19: free spin 27: spin bonus(bet) 28: spin bonus(win)

* BetAmount of a free spin is only a base value used to calculate PayoffAmount. No actual deduction is made.

Response-Pagination:

Parameter	Type	Require	Description
CurrentPage	int	Yes	Current page.
TotalPages	int	Yes	Total pages.
PageLimit	int	Yes	Number of transaction record per page.
TotalNumber	int	Yes	Total transaction amount.

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid key
101	Invalid DateTime	Invalid time format or start time > end time.
4	(other failures)	Other failures

Sample of the request

/GetFreeSpinRecordByTime

StartTime=2023-05-02T00:00:00&EndTime=2023-05-03T00:00:00&Page=1&PageLimit=10000&AgentId=abcd_THB&Key=0000006e5fd5af6b15cce4e668c3e47de5f591000000

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": {
    "Result": [
      {
        "Account": "test001_THB",
        "GameId": 134,
        "WagersId": 1681973017020873134,
        "BetAmount": -1,
        "PayoffAmount": 0,
        "Currency": "THB",
        "WagersTime": "2023-05-02T04:27:47-04:00",
```

```

        "ReferenceId": "1683016002999",
        "Type": 19,
    },
    {
        "Account": "test001_USD",
        "GameId": 78,
        "WagersId": 1682472371000077078,
        "BetAmount": -0.1,
        "PayoffAmount": 0,
        "Currency": "USD",
        "WagersTime": "2023-05-02T04:42:35-04:00",
        "ReferenceId": "1683016170598",
        "Type": 19,
    },
],
"Pagination": {
    "CurrentPage": 1,
    "TotalPages": 1,
    "PageLimit": 10000,
    "TotalNumber": 2
}
}

```

3.2.5. Query free spin usage records(deprecated)

URL	<API URL> /GetFreeSpinDashflow	Method	POST	Return	JSON
Description	Get usage records of free spins after UpdateTime				

Request:

Parameter	Type	Require	Description
UpdateTime	DateTime	Yes	Query time

Response:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id
ReferenceID	string	Yes	Free spin given id
SendTime	DateTime	Yes	Free spin given time
ExpiredTime	DateTime	Yes	Time of given free spins
UpdateTime	DateTime	Yes	Expired time of free spins
SendGame	string	Yes	Games of given free spins
SendAmount	int	Yes	Number of free spins were given
UsedAmount	int	Yes	Number of used free spins
UnusedAmount	int	Yes	Number of unused free spins
ClaimGame	int	Yes	Claim game of free spins (0: not claimed to any game)

Error-code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid key
9	Failure Executing	Internal error by the game provider
101	Invalid DateTime	Invalid time format or start time > end time.
4	(other failures)	Other failures

Sample of the request

```
/GetFreeSpinDashflow
```

```
UpdateTime=2023-11-01T00:00:00&AgentId=abcd_RMB&Key=00000009106ae76957acd37776f90e9c6db478000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": [
    {
      "Account": "test1",
      "ReferenceID": "testReferenceID_1",
      "SendTime": "2023-11-01T02:30:14-04:00",
      "ExpiredTime": "2023-11-05T12:00:00-04:00",
      "UpdateTime": "2023-11-01T02:30:18.52-04:00",
      "SendAmount": 1,
      "UsedAmount": 1,
      "UnusedAmount": 0,
      "ClaimGame": 49
    },
    {
      "Account": "test2",
      "ReferenceID": "testReferenceID_2",
      "SendTime": "2023-11-01T02:37:58-04:00",
      "ExpiredTime": "2023-11-05T12:00:00-04:00",
      "UpdateTime": "2023-11-02T02:38:31.93-04:00",
      "SendAmount": 10,
      "UsedAmount": 8,
      "UnusedAmount": 2,
      "ClaimGame": 49
    }
  ]
}
```

3.2.6. Query game records of FreeSpin by ReferenceID

URL	<API URL> /GetFreeSpinRecordByReferenceID	Method	POST	Return	JSON
Description	Get free spins game records by specific id				

Request:

Parameter	Type	Require	Description
ReferenceID	string	Yes	Free spin unique id

Response:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id
GameId	int	Yes	Game unique id
WagersId	bigint	Yes	Game record unique id
BetAmount	decimal(16,4)	Yes	Bet Amount (must be 0)
PayoffAmount	decimal(16,4)	Yes	Payoff Amount
Currency	string	Yes	Currency code
WagersTime	DateTime	Yes	Bet Time
ReferenceId	string	Yes	Free spin unique id
Type	int	Yes	Statement type: 19: free spin 27: spin bonus(bet) 28: spin bonus(win)

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid key
9	Execution Error	Internal error by the game provider
4	(other failures)	Other failures

Sample of the request

/GetFreeSpinRecordByReferenceID

ReferenceID=freespin_referenceId001&AgentId=abcd_THB&Key=000000483147ccfa09067968e6db1a9faec20e000000

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": [
    {
      "Account": "test01",
      "GameId": 49,
      "WagersId": 1699349260008306049,
      "BetAmount": 0,
      "PayoffAmount": 0,
      "Currency": "THB",
      "WagersTime": "2023-11-16T01:00:00-04:00",
      "ReferenceId": "freespin_referenceId001",
      "Type": 19,
    },
    {
      "Account": "test01",
      "GameId": 49,
      "WagersId": 1699349260008307049,
      "BetAmount": 0,
      "PayoffAmount": 1,
      "Currency": "THB",
      "WagersTime": "2023-11-16T01:00:00-04:00",
      "ReferenceId": "freespin_referenceId001",
      "Type": 19,
    }
  ]
}
```

3.2.7. Cancel the given rounds of free spin

URL	<API URL> /CancelFreeSpin	Method	POST	Return	JSON
Description	Cancel free spin rounds				

Request:

Parameter	Type	Require	Description
ReferenceId	String	Yes	Unique identifier of the free spins

Response:

Parameter	Type	Require	Description
CancelTime	Bigint	Yes	Timestamp

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid Key
9	Execution Error	Server error
101	Free spin not found	Free spin is not exist
101	Free spin already expired	Free spin is already expired
101	Free spin already canceled or free spin rounds have been used up	Free spin has already canceled or free spin rounds have been used up by player
4	(other failures)	Other failures

Sample of the request 1 (json)

```
/CancelFreeSpin

{
  "ReferenceId": "freespintest0001",
  "AgentId": "abcd_THB",
  "Key": "0000006ee9d3d72a696ae6f2fbc2ca40735738000000"
}
```

Sample of the request 2 (form-urlencoded)

```
/CancelFreeSpin

ReferenceId=freespintest0001&AgentId=abcd_THB&Key=0000006ee9d3d72a696ae6f2fbc2ca407357380000000
```

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "CancelTime": 1698796800
}
```

3.2.8. Cancel the player's rounds of free spin

URL	<API URL> /CancelFreeSpinByAccount	Method	POST	Return	JSON
Description	Cancel the player's rounds of free spin				

Request:

Parameter	Type	Require	Description
Account	String	Yes	Member account

Response:

Parameter	Type	Require	Description
CancelTime	Bigint	Yes	Timestamp

Error code:

Error Code	Message	Description
0	Success	Success
2	Invalid Key	Invalid Key
9	Execution Error	Server error
14	User not found	Member is not exist
101	Free spin already canceled or free spin rounds have been used up	The player's free spins have been canceled or have been used up by player
4	(other failures)	Other failures

Sample of the request 1 (json)

```
/CancelFreeSpinByAccount  
{  
  "Account": "test01",  
  "AgentId": "abcd_THB",  
  "Key": "000000183d22571c28ea6e35fc6b90fd21ce29000000"  
}
```

Sample of the request 2 (form-urlencoded)

```
/CancelFreeSpinByAccount  
  
Account=test01&AgentId=abcd_THB&Key=000000183d22571c28ea6e35fc6b90fd21ce29000000
```

Sample of the response body

```
{  
  "ErrorCode": 0,  
  "Message": "",  
  "CancelTime": 1698796800  
}
```

3.2.9. Give free spins to multiple members

URL	<API URL> /CreateFreeSpinForMany	Method	POST	Return	JSON
Description	Give free spin rounds to specified members				

Request:

Parameter	Type	Require	Description
Accounts	String	Yes	Member account, multiple accounts separated by commas(up to 200 accounts)
Currency	String	Yes	Currency used by the member.
ReferenceIds	String	Yes	Unique identifier of the free spins given by this request (50 characters at most), multiple referenceIds separated by commas(up to 200 referenceIds)
FreeSpinValidity	Date	Yes	The date when the given free spins are expired (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05)
NumberOfRounds	Int	Yes	Count of the given free spins.
GameIds	String	Yes	IDs of games for the given free spins. Comma separated if more than one. (200 characters including commas at most)
BetValue	Double	No	The betting value for the player to use for the free spins. Minimum bet value is used if this parameter is not given. P.S. please ignore when generating the key.
StartTime	String	No	The date when the given free spins can be used (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05) If not given, the given free spins can be used immediately. P.S. please ignore when generating the key.

Response:

Parameter	Type	Require	Description
CreateTime	Bigint	Yes	Timestamp
FailedAccounts	Array string	Yes	Failed accounts for giving free spin rounds
FailedReferenceIds	Array string	Yes	Failed referenceIds for giving free spin rounds
FailedErrorCodes	Array int	Yes	Error codes for failed referenceIds
FailedMessages	Array string	Yes	Error messages for failed referenceIds

Error code (for overall results i.e. ErrorCode):

Error Code	Message	Description
0	Success	Success
4	Free spin disabled	Free spin is disabled for this agent
9	Execution Error	Server error
10	Server maintaining	The server is under maintenance.
101	Number of accounts and referenceIds not match	Mismatch between player accounts and referenceIds
101	Too many accounts and referenceIds	Too many accounts and referenceIds
103	Partial create free spin failed	Partial failure to give free game rounds

Error code (for each failed referenceId i.e. FailedErrorCodes)

Error Code	Message	Description
4	Free spin quota exceeded	The free spin quota is exceeded
9	Execution Error	Errors occurred during execution.
101	Invalid Date Time	Format of FreeSpinValidity is not correct
101	Incorrect NumberOfRounds	NumberOfRounds is not a valid number
101	Incorrect GameIds	Some of id(s) in GameIds is invalid or does not support free spins
101	Too many GameIds	GameIds is longer than 200 characters
101	Empty ReferenceId	Empty ReferencedId
101	ReferenceId too long	ReferencedId is longer than 50 characters
102	ReferenceId Exist	ReferencedId is used
104	Currency Not Exist	The game provider does not support this currency

Sample of the request 1 (json)

```
/CreateFreeSpinForMany
{
  "Accounts": "test01,test02",
  "Currency": "THB",
  "ReferenceIds": "freespintest0001,freespintest0002",
  "FreeSpinValidity": "2023-01-01T12:00:00",
  "NumberOfRounds": 10,
  "GameIds": "108,110",
  "StartTime": "2023-01-01T00:00:00",
  "AgentId": "abcd_THB",
  "Key": "000000ee51bf8a79e62845e7cc4ce22126a32d000000"
}
```

Sample of the response body (success)

```
{
  "ErrorCode": 0,
  "Message": "",
  "CreateTime": 1672531200
  "FailedAccounts": [],
  "FailedReferenceId": [],
  "FailedErrorCodes": [],
  "FailedMessages": []
}
```

Sample of the response body (failed for all)

```
{
  "ErrorCode": 4,
  "Message": "Free spin disable",
  "CreateTime": 1672531200
  "FailedAccounts": ["test01","test02","test03"],
  "FailedReferenceId": ["freespintest0001","freespintest0002","freespintest0003"],
  "FailedErrorCodes": [],
  "FailedMessages": []
}
```

Sample of the response body (partially failed)

```
{
  "ErrorCode": 103,
  "Message": "Partial create free spin failed",
  "CreateTime": 1672531200
  "FailedAccounts": ["test01"],
  "FailedReferenceId": ["freespintest0001","freespintest0003"],
  "FailedErrorCodes": [102,4],
  "FailedMessages": ["ReferenceId Exist","Free spin quota exceeded"]
}
```

3.2.10. Query the bet amount for free spins

URL	<API URL> /GetGameBetList	Method	POST	Return	JSON
Description	Query the bet amount for free spins in particular game				

Request:

Parameter	Type	Require	Description
GameId	int	Yes	Game unique identification value
Currency	string	Yes	Currency Code

Response:

Parameter	Type	Require	Description
GameId	int	Yes	Game unique identification value
Currency	string	Yes	Currency Code
BetList	array float	Yes	Free spins bet list

Error code:

Error Code	Message	Description
0	Success	Success
9	Internal Error	Server error
101	Invalid game id	Invalid game unique identifier value
101	This game does not allow free spin	This game does not support free spins.
104	Invalid currency	Invalid currency code

Sample of request 1 (json)

```
/GetGameBetList
{
  "GameId": "49",
  "Currency": "THB",
  "AgentId": "abcd_THB",
  "Key": "0000001af5eae255762861415e9c6100e54e08000000"
}
```

Sample of request 2 (form-urlencoded)

```
/GetGameBetList

GameId=49&Currency=THB&AgentId=abcd_THB&Key=0000001af5eae255762861415e9c6100e54e08000000
```

Sample of response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "GameId": 49,
  "Currency": "THB",
  "BetList": [
    1,
    2,
    3,
    5,
    10,
    20,
    30,
    40,
    50,
    80,
    100,
    200,
    500,
    1000,
    2000,
    3000,
    4000
  ]
}
```


3.2.11. Give spin bonus to a member

URL	<API URL> /CreateSpinBonus	Method	POST	Return	JSON
Description	Give spin bonus rounds to a specified member				

Request:

Parameter	Type	Require	Description
Account	String	Yes	Member account.
Currency	String	Yes	Currency used by the member.
ReferenceId	String	Yes	Unique identifier of the free spins given by this request (50 characters at most).
FreeSpinValidity	Date	Yes	The date when the given free spins are expired (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05) The validity period shall not exceed 31 days from the start time
NumberOfRounds	Int	Yes	Count of the given free spins.
GameIds	String	Yes	IDs of games for the given free spins. Comma separated if more than one. (200 characters including commas at most)
Multiplier	Int	Yes	Wagering requirement: The players must accumulate bets equal to a certain multiple of the bonus amount before they can claim the bonus. It can be set starting from 0x , with a recommended value of 5x to ensure the reasonableness of the game
WagerPeriod	Int	Yes	Valid wagering period, in hours.
BetValue	Double	No	The betting value for the player to use for the free spins. Minimum bet value is used if this parameter is not given. P.S. please ignore when generating the key.
StartTime	String	No	The date when the given free spins can be used (GMT-4). Format: YYYY-MM-DDTHH:MM:SS (2006-01-02T15:04:05) If not given, the given free spins can be used immediately. P.S. please ignore when generating the key.
MinBonus	Double	No	Minimum bonus; initial bonus amount. P.S. please ignore when generating the key.
MaxBonus	Double	No	Maximum cumulative bonus; No limit on cumulative bonus if not specified. P.S. please ignore when generating the key.

Response:

Parameter	Type	Require	Description
CreateTime	Bigint	Yes	Timestamp

Error code:

Error Code	Message	Description
0	Success	Success
4	Spin bonus disable	No authorization to issue spin bonus.
4	Free spin quota not enough	Insufficient quota to issue.
9	Execution Error	Server error
101	Invalid Date Time	Format of FreeSpinValidity is not correct
101	Incorrect NumberOfRounds	NumberOfRounds is not a valid number
101	Incorrect GamesIds	Some of id(s) in GameIds is invalid or does not support free spins
101	Too many GameIds	GameIds is longer than 200 characters
101	Empty ReferenceId	Empty ReferencedId
101	ReferenceId too long	ReferencedId is longer than 50 characters
101	Invalid bet value	BetValue is not a valid value
101	Multiplier less than	ReferencedId is used
102	ReferenceId Exist	The game provider does not support this currency
104	Currency Not Exist	GameIds is longer than 200 characters

Sample of the request 1 (json)

```
/CreateSpinBonus
{
  "Account": "test01",
  "Currency": "THB",
  "ReferenceId": "spinbonustest0001",
  "FreeSpinValidity": "2023-01-01T12:00:00",
  "NumberOfRounds": 10,
  "GameIds": "108,110",
  "Multiplier": 5,
  "WagerPeriod": 24,
  "AgentId": "abcd_THB",
  "Key": "0000007d68c7c0fc7f0c1ead7a56af8c593dd000000"
}
```

Sample of the request 2 (form-urlencoded)

/CreateSpinBonus

Account=test01&Currency=THB&ReferenceId=spinbonustest0001&FreeSpinValidity=2023-01-01T12:00:00&NumberOfRounds=10&GameIds=108,110&Multiplier=5&WagerPeriod=24&AgentId=abcd_THB&Key=0000007d68c7c0fc7f0c1ead7a56af8c593dd0000000

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "CreateTime": 1716968262
}
```

3.2.12. Query Player Free Spin Usage Record

URL	<API URL> /GetUserFreeSpinRecord	Method	POST	Return	JSON
Description	Query Player Free Spin Usage Record				

Request:

Parameter	Type	Require	Description
Account	String	Yes	Member account
ReferenceId	String	No	Specify the free spin id to query

Response:

Parameter	Type	Require	Description
Account	string	Yes	Member unique id
ReferenceID	string	Yes	Unique identifier of the free spins
SendAmount	int	Yes	Number of given free spins
SendTime	DateTime	Yes	Time of given free spins
ExpiredTime	DateTime	Yes	Expired time of free spins
UsedAmount	int	Yes	Number of used free spins
UnusedAmount	int	Yes	Number of unused free spins
ClaimGame	int	Yes	Claim game of free spins (0: not claimed to any game)

Error code:

Error Code	Message	Description
0	Success	Success
101	record not exist	record not exist
101	user not exist	user not exist

Sample of the request 1 (json)

```
/GetUserFreeSpinRecord
{
  "Account": "test01",
  "ReferenceId": "",
  "AgentId": "abcd_THB",
  "Key": "00000002c6fb5b676470ab88edcaf52c451299000000"
}
```

Sample of the request 2 (form-urlencoded)

/GetUserFreeSpinRecord

Account=test01&ReferenceId=&AgentId=abcd_THB&Key=00000002c6fb5b676470ab88edcaf52c451299000000

Sample of the response body

```
{
  "ErrorCode": 0,
  "Message": "",
  "Data": {
    [
      {
        "Account": "test01 ",
        "ReferenceID": "abc",
        "SendAmount": 10,
        "SendTime": "2023-05-02T04:27:10-04:00",
        "ExpiredTime": "2023-06-01T00:00:00-04:00",
        "UsedAmount": 4,
        "UnusedAmount": 6,
        "ClaimGame": 49
      },
      {
        "Account": " test01",
        "ReferenceID": "def",
        "SendAmount": 10,
        "SendTime": "2023-05-02T04:29:32-04:00",
        "ExpiredTime": "2023-06-01T00:00:00-04:00",
        "UsedAmount": 2,
        "UnusedAmount": 8,
        "ClaimGame": 109
      }
    ],
  }
}
```

4. APIs Provided by the Operator

The operator should provide 'auth' , 'bet' , and 'cancelBet' at least. Contact the game provider to confirm the requirements of other APIs.

4.1. API Protocol and Authentication

The operator should provide following information:

- `<api_url>` API URL root path of the operator

HTTP POST is used for most APIs, even some of them can accept HTTP GET.

JSON format is used to pass parameters if HTTP POST is used.

HTTP request header:

`Content-type: application/json`

4.1.1. Authentication (optional)

- The operator could ask the game provider to add a credential in the header of each http request.
- See [Appendix E](#) for available authentication protocols.
- The authentication is not mandatory.

4.1.2. Response

Responses from the operator should be JSON format.

Each response should have following columns:

Parameter	Type	Require	Description
errorCode	int	Yes	API status code 0: success Others: defined by each API
message	string	No	API error message. Not necessary if the request succeeded.

4.2. APIs

4.2.1. Generate the Token

- The operator should generate and hold tokens for the players. The operator should pass the token to the game provider when sending Login or LoginWithoutRedirect requests to the game provider.
- Authentication and bet requests from the game provider carry the token.
- Tokens are used to identify players by the operator.
- The token should not be longer than **800** characters.

Hint: UUID, MD5 or any algorithm which can generate unique string can be considered to generate tokens.
Expired time of tokens is decided by the operator.

4.2.2. Player Authentication

URL	<API URL>/auth	Method	POST	Return	JSON
Description	Validate the player's token				

Request:

Parameter	Type	Require	Description
reqId	string	Yes	Request unique ID (50 characters at most)
token	string	Yes	Authorized key for requests (800 characters at most)

Response:

Parameter	Type	Require	Description
username	string	Yes	The player's account
currency	string	Yes	Currency code of the player's balance (see Appendix B)
balance	double	Yes	Amount of the player's balance
token	string	No	New token for next request. Only when the operator change the token
maxBet	double	No	Maximum bet (for UK regulated market only)

Error code:

Error Code	Message	Description
0	Success	Success
4	Token expired	The token is expired or invalid
5	Other error	Other errors; see message for detail

Simple

Post Body

```
{
  "reqId": "0af0c835-c37b-5da0-9e4e-25463e6ed14d"
  "token": "6f6d63331c1173c8367e43b5fe6c49dd"
}
```

Response

```
{
  "errorCode": 0,
  "message": "success",
  "username": "testUser",
  "currency": "USD",
  "balance": 1000,
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
}
```



```
"maxBet": 2
```

```
}
```

4.2.3. Player Bet (place bet and settlement together)

The 'bet' described in this section is used for slot games and fishing games. See §4.2.7 for card games (poker) and casino games.

URL	<API URL>/bet	Method	POST	Return	JSON
Description	Send a player's bet to the operator. The settlement is included in this request. If no response from the operator due to network or other issues, the game provider will either: 1. cancel this bet (see §4.2.5); 2. Or retry this bet (see §4.2.6). The cancellation will proceed by default. The operator can ask the game provider to retry the bet request, however, the cancellation will be sent after reaching the maximum number of retrying. The operator and the game provider should determine which action beforehand. P.S. Offline payments are allowed in some games. The column 'isFreeRound' of these bets should be true and 'userId' is used to identify the players. (see §4.2.4)				

To process the bet request, use following formula:

If Balance before bet $\geq betAmount$ then

Balance after bet = Balance before bet – $betAmount$ + $winloseAmount$

Else

The bet request fails.

Request:

Parameter	Type	Require	Description
reqId	string	Yes	Request correlation ID. Has a different value if the request is resent. (50 characters at most)
token	string	Yes	Authorized key for requests
currency	string	Yes	Currency code of the bet
game	int	Yes	Game unique ID
round (*)	bigint	Yes	Game record unique ID (the same as WagersId in §3.1.3)
wagersTime	bigint	Yes	Bet time
betAmount	double	Yes	Bet amount
winloseAmount	double	Yes	Payoff amount
isFreeRound	bool	No	true: offline payments (see §4.2.4) false: otherwise
userId	string	No	Player unique ID (by the operator's special demands; always appears in offline payments)
transactionId	bigint	No	1. Wagers id of fishing (by the operator's special demands) or 2. Trigger round id of offline payments
platform	string	No	Platform information (by the operator's special demands;

			should be given by the operator of LoginWithoutRedirect §2.1.1)
statementType	int	No	statement type (by the operator's special demands; see Appendix C)
gameCategory	int	No	Game category (by the operator's special demands; see Appendix D)
freeSpinData	object	No	Free spin information. See Free Spins .
smResult	string	No	Slot machines reporting (for Portugal regulated market)

* The 'round' parameter is the unique identifier of the player bet. It is also used to identify the cancelling.

Response:

Parameter	Type	Require	Description
username	string	Yes	Player unique ID
currency	string	Yes	Currency code of the player's balance
balance	double	Yes	Amount of the player's balance
txId	bigint	No	Transaction unique ID of the operator (only after the operator's recognition)
token	string	No	New token for next request. Only when the operator change the token

Error code:

Error Code	Message	Description
0	Success	Success
1	Already accepted	The bet is already accepted
2	Not enough balance	Not enough balance to bet
3	Invalid parameter	Invalid parameters; see message for detail
4	Token expired	The token is expired or invalid
5	Other error	Other errors; see message for detail

Sample

Post Body

```
/bet
{
  "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
  "currency": "USD",
  "game": 1,
  "round": 17238050501001102002,
```

```
"wagersTime": 1592559162,  
"betAmount": 10,  
"winloseAmount": 5  
}
```

Response

```
{  
  "errorCode": 0,  
  "message": "success",  
  "username": "testUser",  
  "currency": "USD",  
  "balance": 995,  
  "txId": 108430126,  
  "token": "6f6d63331c1173c8367e43b5fe6c49dd"  
}
```

4.2.4. Special Bets

Special bets are the bets (§4.2.3) with special parameters. <API URL>/bet is also used.

Offline payments

Relative parameters: isFreeRound, userId, transactionId

Occurred in few games. Since there is no token of an offline player, the token of the latest login is used and the 'userId' column is used to identifying the player. The 'isFreeRound' column of such a bet should be true. The 'transactionId' column indicates to the round that triggers this free round.

Here are the games using offline payments:

- WARS OF DRAGONS (game ID=9): only free spins.
- MEDUSA (game ID = 101): only free spins.

A trigger round could have multiple offline payments. Each of these offline payments has its own 'round' and shares the same 'transactionId'.

P.S. The request of an offline payment will be resend until successful or 10 times retry if timed out or met other errors. If the operator does not want resend, tell the game provider to configure it. Thus a failed offline payment will be cancelled as a normal bet.

Example Post Body

```
{
  "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
  "currency": "USD",
  "game": 9,
  "round": 17238050501001102002,
  "wagersTime": 1592559162,
  "betAmount": 0,
  "winloseAmount": 55,
  "userId": "3368799_2679638",
  "isFreeRound": true,
  "transactionId": 1630891368000155009
}
```

Free Spins

Relative parameters: freeSpinData

This mechanism is enabled or disabled by the operator's demand. The operator is able to use CreateFreeSpin (see §3.2.1) to give free spins to a specified member in some games.

- The rounds of the free spin (by referenceId) are bound to the game when the member enters it and no longer used in other games.
- If there are more than one referenceIds can be bound, which are expired earlier is bound.
- The expiration of the free spins is checked when the member enters the game. That means the rounds can be used even they are expired before the member leaves the game.
- Free spin rounds are used before normal bets.
- A free spin bet has 0 bet amount.
- The game provider should retry sending a failed free spin bet request or cancel it, which is determined by the operator. The game provider will retry 10 times at most.

There is an additional parameter, freeSpinData, in the bet requests of free spins as the following format:

Parameter	Type	Require	Description
referenceId	string	Yes	Unique identifier of the free spins given by the operator's request in CreateFreeSpin
remain	int	Yes	Remaining rounds of free spins (only current referenceId).
originalBet	float	Yes	The original bet amount (no actual deduction)
deduct	int	Yes	The number of free spin rounds deducted
skipRidValidation	bool	No	Indicates whether to skip free spin referenceId validation. For joint promotions, free spins and their referenceId may be issued by the game provider, in which case the operator system must skip referenceId validation.

Sample of request body

```
/bet

{
  "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
  "currency": "THB",
  "game": 110,
  "round": 17238050501001102002,
```

```

"wagersTime": 1592559162,
"betAmount": 0,
"winloseAmount": 55,
"freeSpinData": {
  "referenceId": "freespintest0001",
  "remain": 9,
  "originalBet": 0.5,
  "deduct": 1,
}
}

```

P.S.

Free spins use /bet in general as the above. If the operator demands to separate to place the bet and the settlement, /sessopmBet (§4.2.7) is used for free spins.

Sample of request body to place the bet of a free spin:

```

/sessionBet

{
  "reqId": "6e6a5dfa-6cd4-4a33-a2b3-78814a0ac024",
  "token": "4bd968261627be1d9e52864291db6073",
  "currency": "THB",
  "game": 142,
  "round": 2703216731000762142,
  "wagersTime": 1703762005,
  "betAmount": 0,
  "winloseAmount": 0,
  "userId": "peterweng_su",
  "freeSpinData": {
    "referenceId": "1703761975259658",
    "remain": 4
    "originalBet": 1,
    "deduct": 2
  },
  "sessionId": 1703216731000762142,
  "type": 1,
  "turnover": 0,
  "preserve": 0
}

```

Sample of request body to settle a free spin:

/sessionBet

```
{
  "reqId": "12800cdb-dfa7-40c9-ac58-79def977a506",
  "token": "4bd968261627be1d9e52864291db6073",
  "currency": "THB",
  "game": 142,
  "round": 1703216731000762142,
  "wagersTime": 1703762005,
  "betAmount": 0,
  "winloseAmount": 1.5,
  "userId": "peterweng_su",
  "freeSpinData": {
    "referenceId": "1703761975259658",
    "remain": 4,
    "originalBet": 0,
    "deduct": 0,
  },
  "sessionId": 1703216731000762142,
  "type": 2,
  "turnover": 0,
  "preserve": 0
}
```


4.2.5. Cancel Bet (rollback the bet and settlement)

The ‘cancelBet’ described in this section is used for slot games and fishing games. See §4.2.8 for card games (poker) and casino games.

URL	<API URL>/cancelBet	Method	POST	Return	JSON
Description	Cancel a bet. The bet amount should be returned to the player while the win amount should be deducted. The game provider should send continuously until the operator responses. This request can be sent when the player is offline. The operator could use either userId or token to recognize the player.				

To process a cancel bet request, use following formula:

$$\text{Balance after cancellation} = \text{Balance before cancellation} + \text{betAmount} - \text{winloseAmount}$$

※ Balance after cancellation should not be negative.

※ If the player’s balance is not enough to process the cancellation, error code 6 should be returned.

Request:

Parameter	Type	Require	Description
reqId	string	Yes	Request correlation ID. Has a different value if the request is resent. (50 characters at most)
currency	string	Yes	Currency code of the bet
game	int	Yes	Game unique ID
round (*)	bigint	Yes	Game record unique ID (the same as ‘round’ in §4.2.3)
betAmount	double	Yes	Bet amount
winloseAmount	double	Yes	Payoff amount
userId	string	Yes	Player unique ID
token	string	Yes	The token used for this bet

* The ‘round’ parameter is the unique identifier of the player bet. It is also used to identify the cancelling.

Response:

Parameter	Type	Require	Description
username	string	Yes	Player unique ID
currency	string	Yes	Currency code of the player’s balance
balance	double	Yes	Amount of the player’s balance
txId	bigint	No	Transaction unique ID of the operator (only after the operator’s cancel)

Error code:

Error Code	Message	Description
0	Success	Success

1	Already canceled	The bet is already cancelled
2	Round not found	Round not found
3	Invalid parameter	Invalid parameters; see message for detail
5	Other error	Other errors; see message for detail
6	Cancel refused	The bet is already accepted and cannot be cancelled

Sample of Request Post Body

```
/cancelBet
{
  "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
  "currency": "USD",
  "game": 1,
  "round": 17238050501001102002,
  "betAmount": 10,
  "winloseAmount": 5,
  "userId": "3368799_2679638",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
}
```

Response

```
{
  "errorCode": 0,
  "message": "success",
  "username": "testUser",
  "currency": "USD",
  "balance": 1000,
  "txId": 108430126
}
```

4.2.6. Resend Bet

Several reasons cause no response from the operator, For example, network delay could cause timeout of the bet and the connection could fail due to packet loss. The game provider can resend such bets if the operator allows.

Resending bets follows the rules:


1. If still no response from the operator, the game provider can retry the sending. Including the first sending, a bet could be sent at almost 3 times. The operator can determine how many times to retry;
2. If still no response after all retries, the game provider should cancel the bet. See §4.2.5.
3. When the operator receives a bet which was accepted yet, the error code of the response to the game provider could be either 0 or 1, while 0 means success and 1 means the bet was already accepted, which are defined in §4.2.3; whatever the error code is, the response must include current balance of the player.

Response


```
{
  "errorCode": 1,
  "message": "already accepted",
  "username": "testUser",
  "currency": "USD",
  "balance": 995,
  "txId": 108430126,
  "token": "6f6d63331c1173c8367e43b5fe6c49dd"
}
```

4.2.7. Sessional Bet (place bet and settle separately)

For table games such as poker cards, roulettes and bingo games, some allow multiple players play together while the others allow only player. In any case each player has a unique round number (*sessionId*) than others even they are playing in the same game round; a player might have multiple bets in a game round while there is one and only one settlement. Each bet or settlement has a unique transaction ID (*round*).

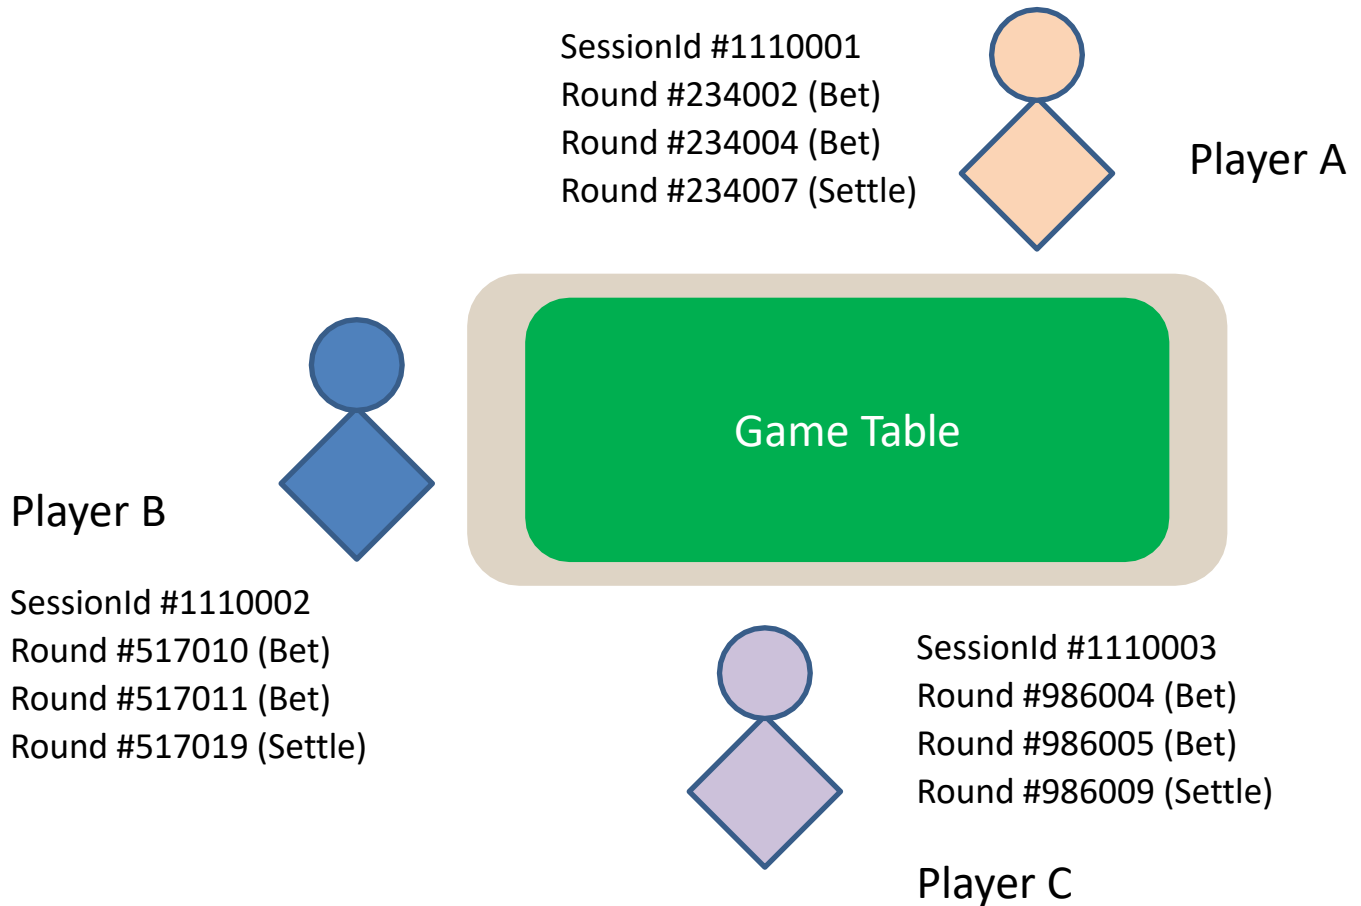

- Please note that *sessionId* is used to represent the round number, and *round* acts as the transaction ID rather than the round number.

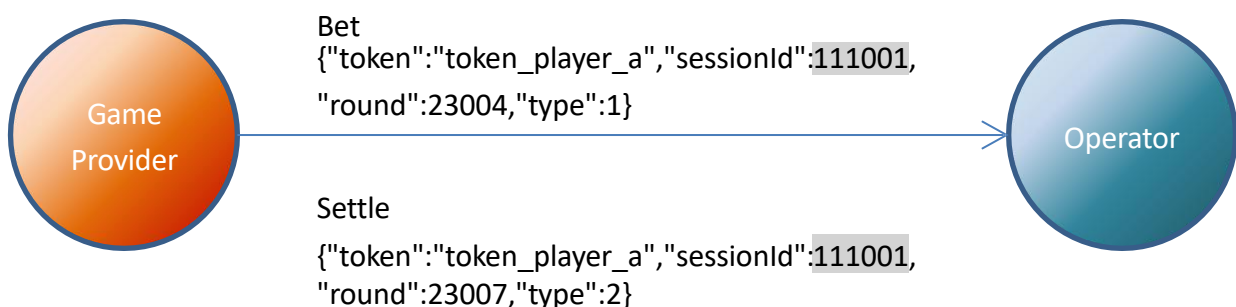

URL	<API URL>/sessionBet	Method	POST	Return	JSON
Description	Send a sessional bet or settlement to the operator, which is used in poker with ‘Bet’ and ‘Settle’. If no response from the operator due to network or other issues, the game provider has following choices to do: 1. Before settling: cancel currency bet, finish and settle the session. 2. After settling: keep trying sending payment to the operator until the n’tth resending (10 times as default). If the sending still failed, the game provider should notify the operator. See §4.2.8 for cancelling a sessional bet. P.S. Because settlement could happen when offline, The column ‘userId’ can be used to identify the players. An alternative way is to use the offline mode.				

Request:

Parameter	Type	Require	Description
reqId	string	Yes	Request correlation ID. Has a different value if the bet is resent. (50 characters at most)
token	string	Yes	Authorized key for requests
currency	string	Yes	Currency code of the bet
game	int	Yes	Game unique ID
round (*)	bigint	Yes	Action unique ID of bet/settle such as the transaction ID
offline	boolean	No	Offline status indicator; see in Offline mode .
wagersTime	bigint	Yes	Bet time
betAmount	double	Yes	Bet amount
winloseAmount	double	Yes	Payoff amount
sessionId (**)	bigint	Yes	Game record unique ID (the same as WagersId in §3.1.3)
type	int	Yes	1 = Bet 2 = Settle
userId	string	No	Player unique ID. Mandatory for type=2; by the operator’s special demands for type=1)
turnover	double	Yes	Turnover amount (see the section Turnover (effective bet amount))
preserve	double	Yes	Preserve balance (see the section Preserve (pre-deducted deposit amount))
platform	string	No	Platform information (by the operator’s special demands; should be given by the operator of LoginWithoutRedirect

			§2.1.1)
sessionTotalBet	double	No	Bet amount of the whole session (by the operator's special demands; only used for the settle)
statementType	int	No	statement type (by the operator's special demands; see Appendix C)
gameCategory	int	No	Game category (by the operator's special demands; see Appendix D)
freeSpinData	object	No	Free spin information. See Free Spins and examples .
smResult	string	No	Slot machines reporting (for Portugal regulated market)

* The “round” parameter is the unique identifier of the bet/settle action. It is also used to identify the cancelling.

** The ‘sessionId’ parameter is the unique identifier of the whole round including bet(s) and settle. All bet(s) and settle share the same sessionId.

There are some differences between the games which *preserve* is used and those do not use *preserve*.

◆ No *preserve*:

Bet: *preserve* = 0, *betAmount* > 0, *winloseAmount* = 0

➤ Balance after bet = balance before bet – *betAmount*

Settle: *preserve* = 0, *betAmount* = 0, *winloseAmount* >= 0

➤ Balance after settle = Balance before settle + *winloseAmount*

◆ With *preserve*:

Bet: *preserve* > 0, *betAmount* = 0, *winloseAmount* = 0

➤ Balance after bet = balance before bet – *preserve*

Settle: *preserve* > 0, *betAmount* >= 0, *winloseAmount* >= 0

Balance after settle = Balance before settle + *preserve* – *betAmount* + *winloseAmount*

Response:

Parameter	Type	Require	Description
username	string	Yes	Player unique ID
currency	string	Yes	Currency code of the player's balance
balance	double	Yes	Amount of the player's balance
txId	bigint	No	Transaction unique ID of the operator (only after the operator's recognition)
token	string	No	New token for next request. Only when the operator change the token

Error code:

Error Code	Message	Description
0	Success	Success

1	Already accepted	The bet is already accepted
2	Not enough balance	Not enough balance to bet
3	Invalid parameter	Invalid parameters; see message for detail
4	Token expired	The token is expired or invalid
5	Other error	Other errors; see message for detail

Samples:

Request Post Body (bet without *preserve*)

```
/sessionBet
{
  "reqId": "b682cf4c-4de8-433c-92aa-8c03f7daf002",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
  "currency": "INR",
  "game": 72,
  "round": 1709179916462815072,
  "wagersTime": 1714107576,
  "betAmount": 10,
  "winloseAmount": 0,
  "sessionId": 1709179916462705072,
  "type": 1,
  "preserve": 0
}
```

Request Post Body (settle without *preserve*)

```
/sessionBet
{
  "reqId": "d8729e34-36c7-4750-87c1-0d0283f7ace7",
  "token": "6f6d63331c1173c8367e43b5fe6c49dd",
  "currency": "INR",
  "game": 72,
  "round": 1709179916462915072,
  "wagersTime": 1714107599,
  "betAmount": 0,
  "winloseAmount": 55,
  "sessionId": 1709179916462705072,
  "type": 2,
  "turnover": 22,
}
```

```
"preserve": 0
}
```

Request Post Body (bet with *preserve*)

```
/sessionBet
{
  "reqId": "e4034252-86ca-40dc-9e29-8a9beb24f28c",
  "token": "ae97a7179a4bc47a99c753704a340f82",
  "currency": "THB",
  "game": 94,
  "round": 1654662770005413094,
  "wagersTime": 1655192382,
  "betAmount": 0,
  "winloseAmount": 0,
  "sessionId": 1654662770005303094,
  "type": 1,
  "preserve": 12800
}
```

Request Post Body (settle with *preserve*)

```
/sessionBet
{
  "reqId": "63b3e8ba-53fe-48e6-b2c3-ac218b89a1c7",
  "token": "ae97a7179a4bc47a99c753704a340f82",
  "currency": "THB",
  "game": 94,
  "round": 1654662770005513094,
  "wagersTime": 1655192471,
  "betAmount": 912,
  "winloseAmount": 18240,
  "sessionId": 1654662770005303094,
  "type": 2,
  "turnover": 912,
  "preserve": 12800
}
```



Response

```
{  
  "errorCode": 0,  
  "message": "success",  
  "username": "testUser",  
  "currency": "USD",  
  "balance": 995,  
  "txId": 108430126  
  "token": "6f6d63331c1173c8367e43b5fe6c49dd"  
}
```



Turnover (effective bet amount)

If the operator does not give rebates to the player by the betting amount, *turnover* can be ignored.

Turnover does not mean the betting amount of the game round — although this value is usually identical to the summary of the player's *betAmount* in most games. If the operator gives the player a rebate at a certain rate based on the player's betting amount, *turnover* is recommended to replace *betAmount* as the basement to calculate the rebate.

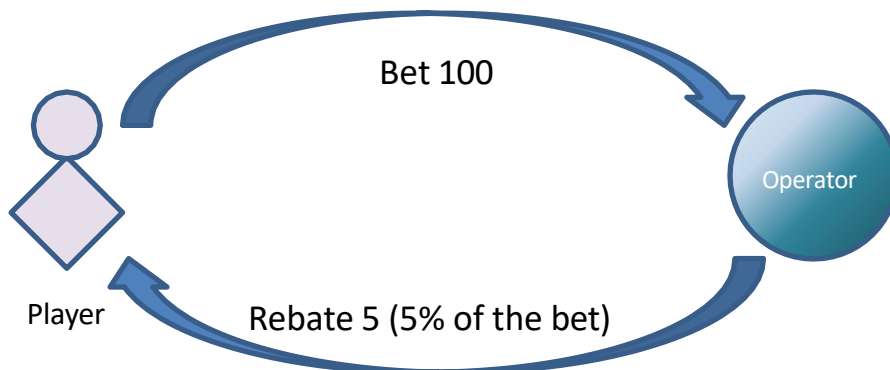

Consider the case of a dice game the player can bet both SMALL and BIG in which, and the payment is double of both sides. If the player always bets 100 to BIG and another 100 to SMALL, not only 200 is paid as the winning in each round but the rebate is also given by the operator.

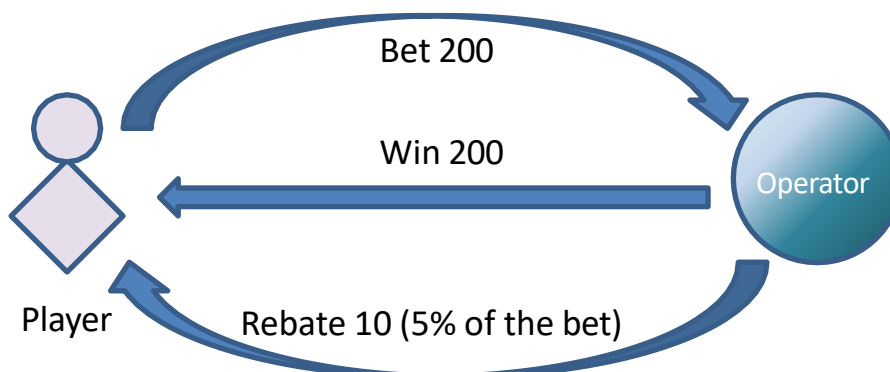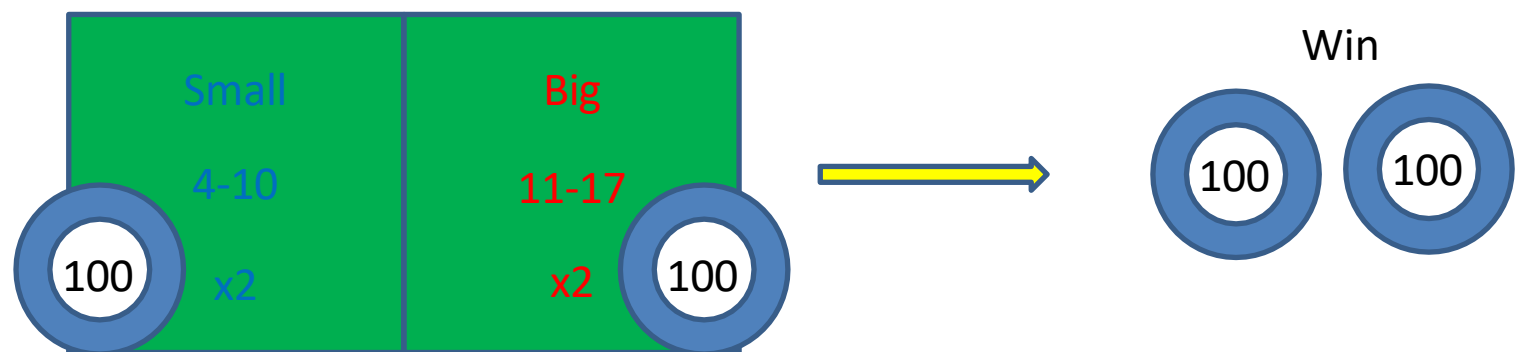


The player can always bet 200 and get 210 back!

To prevent such arbitrage, we provide a different formula of turnover for these games.


$$turnover = \min(betAmount, |winloseAmount - betAmount|)$$

Applying this formula to the above case, $turnover = \min(200, |200-200|) = 0$. If the operator uses *turnover* to calculate the rebate, 0 is given in this case.

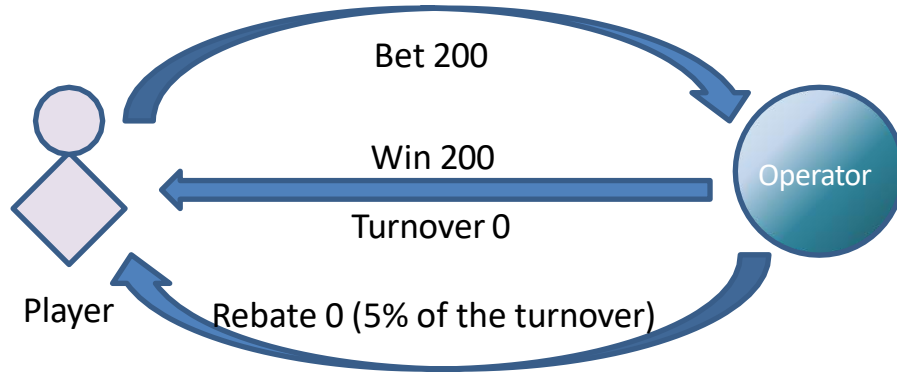


Preserve (pre-deducted deposit amount)


Some games such as Rummy calculate *betAmount* at the settle. If the bet is sent to the operator at the end of the round, the player can withdraw all balance from the operator and fail the settle to avoid the losing as following:

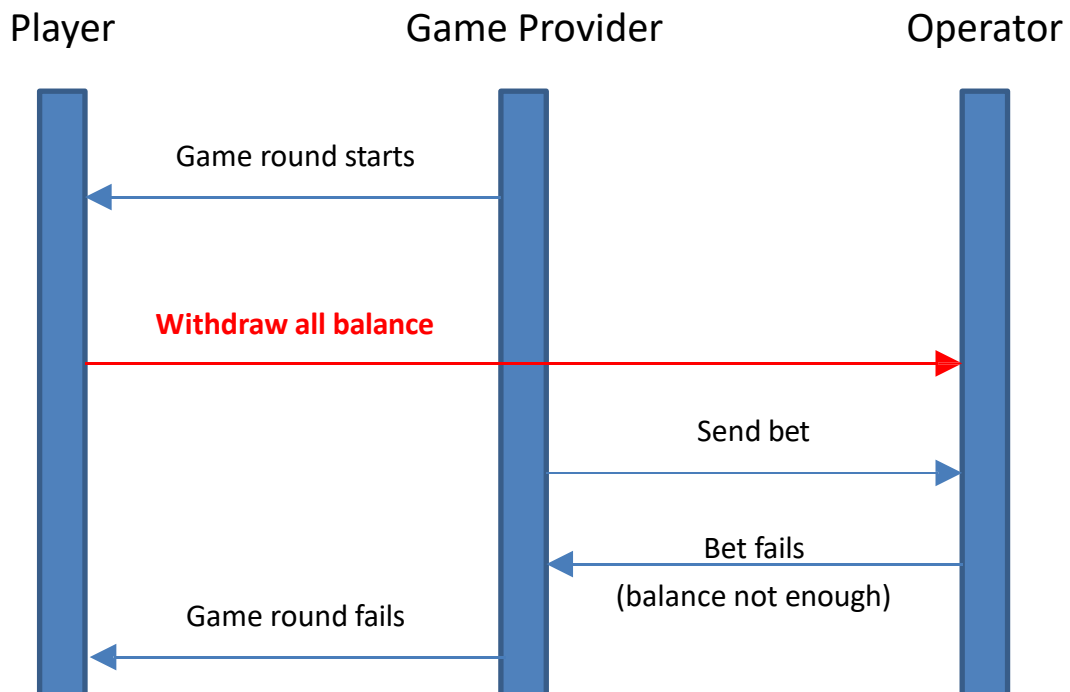

To prevent such arbitrage, the pre-deducted deposit amount as known as *preserve* is proposed. The operator should deduct the *preserve* amount from the player before the game round starts and return it after deducting the betting amount to the player at the end. Such process ensures that each game round can be settled successfully.

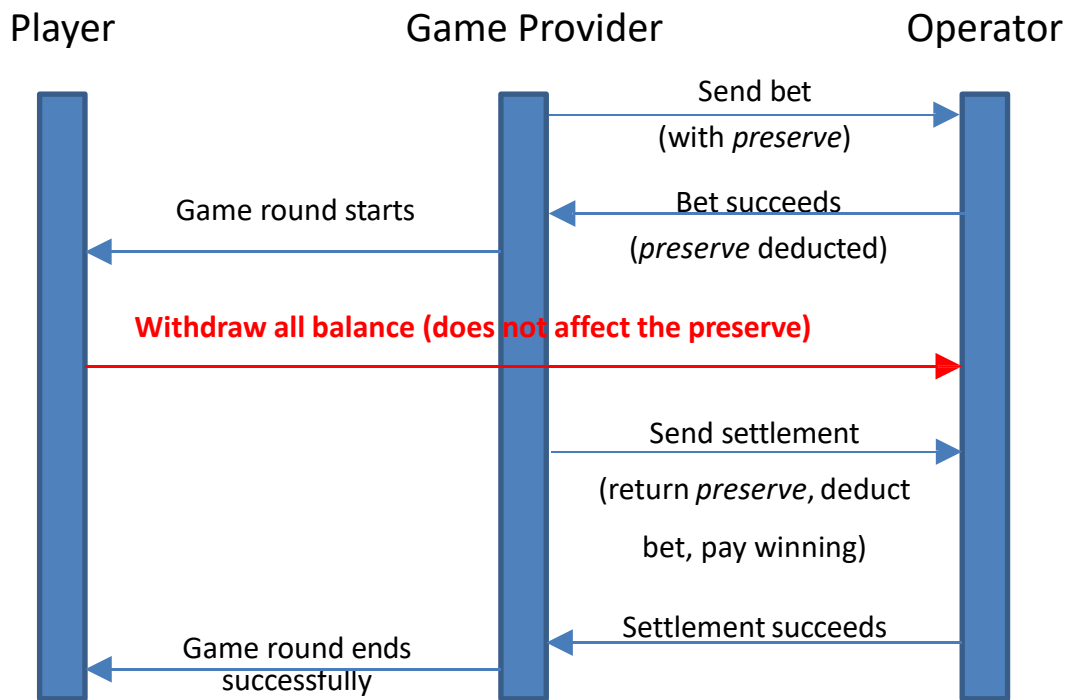

Please note that the game provider will verify the player's balance in the response of the bet request. If the balance is the same as that at the beginning, the *preserve* mechanism is thought not implemented correctly by the operator and the game provider will fail the game round to prevent other potential errors.

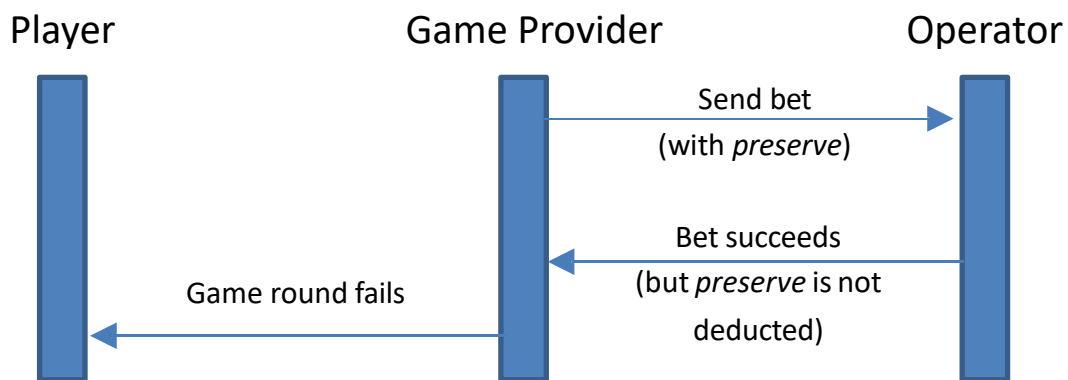

4.2.8. Cancel Sessional Bet (rollback the bet)

URL	<API URL>/cancelSessionBet	Method	POST	Return	JSON
Description	Cancel a sessional bet. The game provider should send continuously until the operator responses. This request can be sent when the player is offline. The operator could use either <code>userId</code> or <code>token</code> to recognize the player.				

Request:

Parameter	Type	Require	Description
reqId	string	Yes	Request correlation ID. Has a different value if the bet is resent. (50 characters at most)
currency	string	Yes	Currency code of the bet
game	int	Yes	Game unique ID
round (*)	bigint	Yes	Action unique ID of the bet (the same as 'round' in §4.2.7)
offline	boolean	No	Offline status indicator; see in Offline mode .
betAmount	double	Yes	Bet amount Type = 1: bet amount of that bet request
winloseAmount	double	Yes	Payoff amount. Always 0 in the cancelSessionBet request.
userId	string	Yes*	Player unique ID
token	string	Yes	The token used for this bet or an offline token
sessionId	bigint	Yes	Game record unique ID (the same as 'sessionId' in §4.2.7)
type	int	Yes	1 = Bet
preserve	double	No	Preserve value (the same as 'preserve' in §4.2.7)

* The "round" parameter is the unique identifier of the bet/settle action. It is also used to identify the cancelling.

* The 'userId' is not used if the [offline mode](#) is used.

To process a cancelSessionBet request, use following formula:

- ◆ No *preserve*:
 - Balance after cancel = balance before cancel + *betAmount*
- ◆ With *preserve*:
 - Balance after cancel = balance before cancel + *preserve*

Response:

Parameter	Type	Require	Description
username	string	Yes	Player unique ID
currency	string	Yes	Currency code of the player's balance
balance	double	Yes	Amount of the player's balance

txId	bigint	No	Transaction unique ID of the operator (only after the operator's cancel)
------	--------	----	--

Error code:

Error Code	Message	Description
0	Success	Success
1	Already canceled	The bet is already cancelled
2	Round not found	Round not found
3	Invalid parameter	Invalid parameters; see message for detail
5	Other error	Other errors; see message for detail

P.S. A type-1 sessional bet will always following a previous successful bet. After all bets succeeded or one of them failed, the session is settled.

- Cancel a type-1 sessional bet: cancel one bet and do not affect other bets in the same session. Only used for the last bet before settling.
 - A settlement is acceptable by the operator but a bet is not after the cancelling.
 - However, the operator could receive the cancel before the bet due to network or other issues. When the operator receive a bet never happens of the session, the session should be pointed out any bet of which should be refused.
 - A type-1 cancelling could be received after the settlement due to network or other issues. In this case, the game provider calculates the settlement based on the failure of the last bet, so the operator MUST cancel this bet.
- The settlement (type=2) should never be cancelled.

Appendix A – Language Codes

Language	Code
Bengali	bn-IN
Danish	da-DK
German	de-DE
English	en-US
Spanish	es-AR
French	fr-FR
Greek	gr-GR
Hindi	hi-IN
Indonesian	id-ID
Italian	It-IT
Japanese	ja-JP
Korean	ko-KR
Malay	ms-MY
Myanmar	my-MM
Dutch	nl-NL
Portuguese	pt-BR
Romanian	ro-RO
Russian	ru-RU
Swedish	sv-SE
Tamil	ta-IN
Thai	th-TH
Turkish	tr-TR
Vietnamese	vi-VN
Simplified Chinese	zh-CN

Appendix B – Currency Codes

Please refer <https://storage.googleapis.com/winbet-tada-cdn/api-documents/Currency-List.xlsx>

Appendix C – Statement Types

Code	Type
------	------

1	Normal bet
9	Offline payment (see §4.2.4)
11	Item card
12	Buy bonus
17	MustHitBy (bet)
18	MustHitBy (win)
19	Free spin
28	Spin Bonus
33	Jackpot Legend Mini
34	Jackpot Legend Minor
35	Jackpot Legend Major
36	Jackpot Legend Grand

Appendix D – Game Categories

Code	Category
1	Slot
2	Poker
3	Lobby
5	Fishing
8	Casino (including bingo)

Appendix E – Extra Authentications

Available HTTP authentication protocols are listed in this section.

HTTP Basic Authentication

HTTP Basic Authentication is a method for an HTTP user agent (i.e. the operator defined in this document), a user name and password when making a request, where credentials is the Base64 encoding of ID and password joined by a single colon. Please refer to [Wikipedia](#) for more information.

For example:

- username:abc, password:abc123
- abc:abc123

- Base64 encode: YWJjOmFiYzEyMw==
- HTTP request header:

Authorization: Basic YWJjOmFiYzEyMw==

A complete ‘auth’ request (§4.2.2) is listed as following:

Body:

Authorization: Basic YWJjOmFiYzEyMw==

Content-Type: application/json

Body:

```
{"reqId": "011d3624-90cd-477b-bf05-b8b2c623ee45", "token": "dc7b7f79187bbc17cc2994965a736a9c"}
```

Offline mode (optional)

A settlement (/sessionBet with type=2) or a refund (/cancelSession) could be sent when the token use by the bet is expired. The operator can demand the game provider use the offline mode. **The offline mode is disabled defaultly.** In this mode, the offline indicator is carried as a true value and the offline token is used. An offline token key is given in advance.

An offline token is created using following algorithm:

SHA224(<offline token key> + <round id> + <session id> + '_' + <user id>)

For example, when the offline token key is given as AAAA-BBBB-CCCC-DDDD, an offline settlement for round=26727840008124608, sessionId=26727838908124090 and userId=APLAYER, the offline token is

SHA224 (AAAA-BBBB-CCCC-DDDD2672784000812460826727838908124090_APLAYER) =
1cb22d550f2d7e755631435c28b9a08b08519f49f6fba46095f755b6

Thus the following request body is sent:

```
{
  "reqId": "0d8098b1-1ee2-47cb-b159-9149e2fb945b",
  "token": "1cb22d550f2d7e755631435c28b9a08b08519f49f6fba46095f755b6",
  "currency": "USD",
  "game": 124,
  "round": 26727840008124608,
  "offline": true,
  "wagersTime": 1687348800,
  "betAmount": 0,
  "winloseAmount": 0,
  "sessionId": 26727838908124090,
  "type": 2,
  "turnover": 60
}
```

Please note the **offline** field is set to true and **userId** is not used in the offline request.

Appendix F – Testing Tools

The testing tools are provided by the game provider, allowing operator to test the operator-provided APIs (§4.2). Provides the ability to query samples and call the actual operator API. This testing tools can be performed in a test environment only.

- `<API URL>` API URL root path of the game provider

Each response contains following parameters:

Parameter	Type	Description
ErrorCode	int	Status code of the response
Message	string	Status description of the response
Data	Object	Response data

Data contains following parameters:

Parameter	Type	Description
Request Header	Object	Header of the transmitted HTTP request
[Authorization] HTTP Basic Authentication	Object	Example of HTTP Authentication
Request Body	Object	HTTP request sent by the game provider
Response	Object	HTTP response returned by the operator-provided API

```
{
  "Request Header": {
    "Content-type": "application/json",
    "(Optional) Authorization": "Basic ZGVtbzpwQDU1dzByZA=="
  },
  "[Authorization] HTTP Basic Authentication": {
    "Format": "username:password",
    "Encoding": "Base64 encoded",
    "Sample": "demo:p@55w0rd",
    "Sample Encoded String": "ZGVtbzpwQDU1dzByZA=="
  },
}
```

1. Query Samples

Query the sample requests and responses for each API for reference only, not an actual request being sent.

URL	<API URL>/sample/auth	Method	GET	Return	JSON
Description	Query auth API sample				

Request:

Parameter	Type	Require	Description
Token	string	No	Authorized key for requests (800 characters at most) Display sample Token if not provided.

```
{
  "Request Body": {
    "reqId": "0af0c835-c37b-5da0-9e4e-25463e6ed14d",
    "token": "{Player's Token}"
  },
  "Response": {
    "errorCode": 0,
    "message": "success",
    "username": "{Player's Username}",
    "currency": "{Player's Currency}",
    "balance": 1000,
    "token": "{Player's Token}"
  }
}
```

URL	<API URL>/sample/bet	Method	GET	Return	JSON
Description	Query bet API sample				

Request:

Parameter	Type	Require	Description
Token	string	No	Authorized key for requests (800 characters at most) Display sample Token if not provided.
IsFreeRound	bool	No	True: display sample for offline payments

```
{
  "Request Body": {
    "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
    "token": "{Player's Token}",
    "currency": "{Player's Currency}",
    "game": 9,
    "round": 1723805050100110200,
  }
}
```

```

    "wagersTime": 1592559162,
    "betAmount": 10,
    "winloseAmount": 5,
    "isFreeRound": true,
    "userId": "{Player's UserID}",
    "transactionId": 1630891368000155009
  },
  "Response": {
    "errorCode": 0,
    "message": "success",
    "username": "{Player's Username}",
    "currency": "{Player's Currency}",
    "balance": 1000,
    "txId": 108430126,
    "token": "{Player's Token}"
  }
}

```

URL	<API URL>/sample/cancelBet	Method	GET	Return	JSON
Description	Query cancelBet API sample				

Request:

Parameter	Type	Require	Description
Token	string	No	Authorized key for requests (800 characters at most) Display sample Token if not provided.
IsFreeRound	bool	No	True: display sample for offline payments

```

{
  "Request Body": {
    "reqId": "e4034252-86ca-40dc-9e29-8a9beb24f28c",
    "currency": "{Player's Currency}",
    "game": 9,
    "round": 1723805050100110200,
    "betAmount": 10,
    "winloseAmount": 5,
    "userId": "{Player's User ID}",
    "token": "{Player's Token}"
  },
  "[Bet Request Body]": {
    "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",

```

```

    "token": "{Player's Token}",
    "currency": "{Player's Currency}",
    "game": 9,
    "round": 1723805050100110200,
    "wagersTime": 1592559162,
    "betAmount": 10,
    "winloseAmount": 5,
    "isFreeRound": true,
    "userId": "{Player's UserID}",
    "transactionId": 1630891368000155009
  },
  "Response": {
    "errorCode": 0,
    "message": "success",
    "username": "{Player's Username}",
    "currency": "{Player's Currency}",
    "balance": 1000,
    "txId": 108430126,
    "token": "{Player's Token}"
  }
}

```

URL	<API URL>/sample/sessionBet	Method	GET	Return	JSON
Description	Query sessionBet API sample				

Request:

Parameter	Type	Require	Description
Token	string	No	Authorized key for requests (800 characters at most) Display sample Token if not provided.
Type	int	No	Bet type: 1 = Bet 2 = Settle Display bet sample if not provided
Preserve	double	No	Preserve balance

```

{
  "Request Body": {
    "reqId": "e4034252-86ca-40dc-9e29-8a9beb24f28c",
    "token": "{Player's Token}",
    "currency": "{Player's Currency}",

```

```

    "game": 94,
    "round": 1654662770005413094,
    "wagersTime": 1655192382,
    "betAmount": 100,
    "winloseAmount": 0,
    "sessionId": 1654662770005303094,
    "type": 1,
    "userId": "{Player's UserID}",
    "turnover": 0,
    "preserve": 1000
  },
  "Response": {
    "errorCode": 0,
    "message": "success",
    "username": "{Player's Username}",
    "currency": "{Player's Currency}",
    "balance": 1000,
    "txId": 108430126,
    "token": "{Player's Token}"
  }
}

```

URL	<API URL>/sample/cancelSessionBet	Method	GET	Return	JSON
Description	Query cancelSessionBet API sample				

Request:

Parameter	Type	Require	Description
Token	string	No	Authorized key for requests (800 characters at most) Display sample Token if not provided.
Preserve	double	No	Preserve balance

```

{
  "Request Body": {
    "reqId": "9177b749-cf37-585b-b17c-cfd5024ca6e2",
    "currency": "{Player's Currency}",
    "game": 94,
    "round": 1654662770005413094,
    "betAmount": 0,
    "winloseAmount": 0,
    "userId": "{Player's User ID}",

```

```

        "token": "{Player's Token}",
        "sessionId": 1654662770005303094,
        "type": 1,
        "preserve": 1000
    },
    "[Session Bet Request Body]": {
        "reqId": "e4034252-86ca-40dc-9e29-8a9beb24f28c",
        "token": "{Player's Token}",
        "currency": "{Player's Currency}",
        "game": 94,
        "round": 1654662770005413094,
        "wagersTime": 1655192382,
        "betAmount": 0,
        "winloseAmount": 0,
        "sessionId": 1654662770005303094,
        "type": 1,
        "userId": "{Player's UserID}",
        "turnover": 0,
        "preserve": 1000
    },
    "Response": {
        "errorCode": 0,
        "message": "success",
        "username": "{Player's Username}",
        "currency": "{Player's Currency}",
        "balance": 1000,
        "txId": 108430126,
        "token": "{Player's Token}"
    }
}

```


2. Actually calling the operator-provided API

Call the operator-provided APIs and send the HTTP request, retrieve responses from the operator's APIs. The operator is required to receive and respond to HTTP requests sent by the game provider. Operators are required to provide Token, AgentID and Key when calling this test tool for encryption and decryption purpose.

URL	<API URL>/test/auth	Method	GET	Return	JSON
Description	Send requests to operator's auth API for testing				

Request:

Parameter	Type	Require	Description
AgentId	string	Yes	Unique ID of the agent
Key	string	Yes	Validation Key (see in §1.1.2)
Token	string	Yes	Authorized key for requests (800 characters at most)

```
{
  "Request Body": {
    "reqId": "71d19bc8-90ec-4f25-8472-d6cb0361ab46",
    "token": "793a4f6faf057353d44ee70cb6596cb5"
  },
  "Response": {
    "errorCode": 0,
    "message": "token verify success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101400,
    "token": "793a4f6faf057353d44ee70cb6596cb5"
  }
}
```

URL	<API URL>/test/bet	Method	GET	Return	JSON
Description	Send requests to operator's bet API for testing				

Request:

Parameter	Type	Require	Description
AgentId	string	Yes	Unique ID of the agent
Key	string	Yes	Validation Key (see in §1.1.2)
Token	string	Yes	Authorized key for requests (800 characters at most)
IsFreeRound	bool	No	True: offline payments

UserId	string	No	Player unique ID (by the operator's special demands; always appears in offline payments) Default value from the testing tool will be used if not provided.
--------	--------	----	--

```
{
  "Request Body": {
    "reqId": "dc996964-31ff-4002-a408-4800adc859ee",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "currency": "THB",
    "game": 9,
    "round": 1699426561000030052,
    "wagersTime": 1699426561,
    "betAmount": 10,
    "winloseAmount": 5
  },
  "Response": {
    "errorCode": 0,
    "message": "user bet success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101400,
    "txId": 1699426561000030052,
    "token": "52adb8d42ec8241dc3bd3e80d6227a87"
  }
}
```

URL	<API URL>/test/cancelBet	Method	GET	Return	JSON
Description	Send requests to operator's cancelBet API for testing				

Request:

Parameter	Type	Require	Description
AgentId	string	Yes	Unique ID of the agent
Key	string	Yes	Validation Key (see in §1.1.2)
Token	string	Yes	Authorized key for requests (800 characters at most)
IsFreeRound	bool	No	True: offline payments
UserId	string	No	Player unique ID (by the operator's special demands; always appears in offline payments) Default value from the testing tool will be used if not provided.

```

{
  "Request Body": {
    "reqId": "dc996964-31ff-4002-a408-4800adc859ee",
    "currency": "THB",
    "game": 9,
    "round": 1699426769000040045,
    "betAmount": 10,
    "winloseAmount": 5,
    "userId": "test_userId",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87"
  },
  "[Bet Request Body]": {
    "reqId": "b1efe8f5-3fed-4445-8fee-f86d43e66e50",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "currency": "THB",
    "game": 9,
    "round": 1699426769000040045,
    "wagersTime": 1699426769,
    "betAmount": 10,
    "winloseAmount": 5
  },
  "Response": {
    "errorCode": 0,
    "message": "Cancel bet success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101400,
    "txId": 1699426561000030052
  }
}

```

URL	<API URL>/test/sessionBet	Method	GET	Return	JSON
Description	Send bet and settle requests to operator's sessionBet API for testing. If multiple bets are applicable, two bet requests will be sent.				

Request:

Parameter	Type	Require	Description
AgentId	string	Yes	Unique ID of the agent
Key	string	Yes	Validation Key (see in §1.1.2)

Token	string	Yes	Authorized key for requests (800 characters at most)
GameType	int	Yes	Game Types: 1. Bingo 2. Card games (without Preserve) 3. Card games (with Preserve)
UserId	string	No	Player unique ID (by the operator's special demands; always appears in offline payments) Default value from the testing tool will be used if not provided.

```
{
  "Request Body (Bet 1)": {
    "reqId": "efbe63b0-b2d0-457a-ab75-12dc63349084",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "currency": "THB",
    "game": 199,
    "round": 1699428150000120079,
    "wagersTime": 1699428150,
    "betAmount": 100,
    "winloseAmount": 0,
    "sessionId": 1699428150000110079,
    "type": 1,
    "userId": "test_user_id",
    "turnover": 0
  },
  "Response (Bet 1)": {
    "errorCode": 0,
    "message": "user bet success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101400,
    "txId": 1699428150000120079,
    "token": "52adb8d42ec8241dc3bd3e80d6227a87"
  },
  "Request Body (Settle)": {
    "reqId": "b2da30b2-9c97-4763-8923-2bc6e9ce7aa8",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "currency": "THB",
    "game": 199,
    "round": 1699428408000170072,
```

```

    "wagersTime": 1699428408,
    "betAmount": 100,
    "winloseAmount": 200,
    "sessionId": 1699428150000110079,
    "type": 2,
    "userId": "test_user_id",
    "turnover": 0
  },
  "Response (Settle)": {
    "errorCode": 0,
    "message": "user bet success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101500,
    "txId": 1699428408000170072,
    "token": "52adb8d42ec8241dc3bd3e80d6227a87"
  }
}

```

URL	<API URL>/test/cancelSessionBet	Method	GET	Return	JSON
Description	Send requests to operator's cancelSessionBet API for testing				

Request:

Parameter	Type	Require	Description
AgentId	string	Yes	Unique ID of the agent
Key	string	Yes	Validation Key (see in §1.1.2)
Token	string	Yes	Authorized key for requests (800 characters at most)
GameType	int	Yes	Game Types: 1. Bingo 2. Card games (without Preserve) 3. Card games (with Preserve)
UserId	string	No	Player unique ID (by the operator's special demands; always appears in offline payments) Default value from the testing tool will be used if not provided.

```

{
  "Request Body": {
    "reqId": "efbe63b0-b2d0-457a-ab75-12dc63349084",

```

```

    "currency": "THB",
    "game": 216,
    "round": 1699428150000120079,
    "betAmount": 100,
    "winloseAmount": 0,
    "userId": "test_user_id",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "sessionId": 1699428150000110079,
    "type": 1
  },
  "[Session Bet Request Body]": {
    "reqId": "b2da30b2-9c97-4763-8923-2bc6e9ce7aa8",
    "token": "52adb8d42ec8241dc3bd3e80d6227a87",
    "currency": "THB",
    "game": 216,
    "round": 1699428150000120079,
    "wagersTime": 1699428408,
    "betAmount": 100,
    "winloseAmount": 0,
    "sessionId": 1699428150000110079,
    "type": 1,
    "userId": "test_user_id",
    "turnover": 0
  },
  "Response (Settle)": {
    "errorCode": 0,
    "message": "Cancel bet success",
    "username": "test_user_id",
    "currency": "THB",
    "balance": 101500,
    "txId": 1699428408000170072
  }
}

```