



SPRINT 4: Despliegue de la Aplicación (Servidor UNAB)

Identificación Proyecto	
Nombre Proyecto:	Marcadores Deportivos
Número Equipo:	1
Integrantes del equipo	
Rol (Líder-Desarrollador – Cliente)	Nombre
Líder (Scrum Master)	Leyniker Ferley Celis
Desarrolladores (Scrum Team)	María Camila Esquivel Álvarez
Cliente	Osmer Eduardo Ruíz Mateus

Evidencia Configuración

Como evidencia de la configuración del servidor se debe presentar capturas de pantalla donde se visualice este proceso.

Construcción del Proyecto: Heroku

* configs: jwtfunciones

```

1  import jwt from 'jsonwebtoken';
2
3  export const generateToken = (uid) => {
4      const expiresIn = 60 * 30;
5
6      try {
7          const token = jwt.sign({ uid }, process.env.JWTPRIVATEKEY, { expiresIn });
8          console.log(`Mi token es:${token}`);
9          return { token };
10     } catch (error) {
11         console.log(error);
12     }
13 };
14
15
16 export const generateRefreshToken = (uid, res) => {
17     const expiresIn = 60 * 60 * 24 * 30;
18     try {
19         const refreshToken = jwt.sign({ uid }, process.env.JWT_REFRESH, {
20             expiresIn,
21         });
22
23         res.cookie("refreshToken", refreshToken, {
24             httpOnly: true,
25             secure: !(process.env.MODE === "developer"),
26             expires: new Date(Date.now() + expiresIn * 1000),
27             sameSite: "none",
28         });
29         // res.cookie("refreshToken", refreshToken, {
30         //     httpOnly: true,
31         //     secure: true,
32         //     expires: new Date(Date.now() + expiresIn * 1000),
33         // });
34     } catch (error) {
35         console.log(error);
36     }
37 };

```



```
16 export const generateRefreshToken = (uid, res) => {
17   const expiresIn = 60 * 60 * 24 * 30;
18   try {
19     const refreshToken = jwt.sign({ uid }, process.env.JWT_REFRESH, {
20       expiresIn,
21     });
22
23     res.cookie("refreshToken", refreshToken, {
24       httpOnly: true,
25       secure: !(process.env.MODO === "developer"),
26       expires: new Date(Date.now() + expiresIn * 1000),
27       sameSite: "none",
28     });
29     // res.cookie("refreshToken", refreshToken, {
30     //   httpOnly: true,
31     //   secure: true,
32     //   expires: new Date(Date.now() + expiresIn * 1000),
33     // });
34   } catch (error) {
35     console.log(error);
36   }
37 };
38
39
40 export const tokenVerificationErrors = [
41   "invalid signature": "La firma del JWT no es válida",
42   "jwt expired": "JWT expirado",
43   "invalid token": "Token no válido",
44   "No Bearer": "Utiliza formato Bearer",
45   "jwt malformed": "JWT formato no válido",
46 ];
47
48
49
```

- controllers:
 - * eventcontrollers.js



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda eventcontrollers.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR HEROKU ... JS app.js {} package.json M {} package-lock.json M JS eventcontrollers.js X JS routes.js TC localhost:8000/reguser/ .env

controllers > JS eventcontrollers.js > ...

```
1 import { evento } from '../models/eventos.js';
2
3 //Registrar un evento deportivo
4 export const regevento = (req, res) => {
5   const cevento = evento(req.body);
6   cevento
7     .save()
8     .then((data) => res.json(data))
9     .catch((error) => res.json({ message: error }));
10 }
11
12 //Mostrar los eventos deportivos de la BD
13
14 export const shevento = (req,res) => {
15
16   | evento
17   | .find()
18   | .then((data)=> res.json(data))
19   | .catch((error)=> res.json({message:error}));
20 }
21
22 //Mostrar un evento deportivo específico
23
24 export const shonevent = (req, res) => {
25   const { id } = req.params;
26   evento
27     .findById(id)
28     .then((data) => res.json(data))
29     .catch((error) => res.json({ message: error }));
30 }
31
32
33 //Borrar un evento deportivo
34
35
```

Lin. 1, col. 1 Espacios: 2 UTF-8 CRLF {} JavaScript Go Live ⚡ C

* logincontrollers.js



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda logincontrollers.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR HEROKU app.js package.json M logincontrollers.js package-lock.json M routes.js localhost:8000/reguser/.env

```
controllers > JS logincontrollers.js
1 import bcrypt from 'bcrypt';
2 import usuario from '../models/usuarios.js';
3 import {generateToken} from '../configs/jwtfunciones.js'
4 import dotenv from "dotenv";
5 dotenv.config();
6 import jwt from 'jsonwebtoken';

7
8 export const login = async (req,res) => {
9     try {
10         const { correo, password } = req.body;
11
12         let user = await usuario.findOne({ correo });
13         if (!user)
14             return res.status(403).json({ error: "No existe este correo" });
15         const respuestaPassword = await usuario.login(correo, password)
16         // const respuestaPassword = await user.comparePassword(password);
17         if (respuestaPassword){
18             //aca generamos nuestro token JWT
19             const token = generateToken(user._id);
20             return res.json({ token });
21
22             //aca configuramos el token en una cookie
23             res.cookie("token", token);
24             //return res.status(200).json({message: "usuario y contraseña correcta" });
25             // Generar el token JWT
26
27             // generateRefreshToken(user.id, res);
28
29             // return res.json({ token, expiresIn });
30         } else {
31             return res.status(403).json({message: "usuario y contraseña incorrecta" });
32         }
33
34     } catch (error) {
35         console.log(error);
36     }
37 }
```

Lín. 1, col. 1 Espacios: 4 UTF-8 CRLF () JavaScript ⌂ Go Live ⌂ ⌂



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda logincontrollers.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR ... JS app.js {} package.json M JS logincontrollers.js X {} package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
      JS logincontrollers.js
        JS logincontrollers.js > ...
        38
        39 }
        40
        41 export const loginJwt = async (req,res) => {
        42   if ((req.body.correo == 'admin') && (req.body.password == '123456')){
        43     const id = '63703e1f4bd19icb4c6d816';
        44     const payload = [
        45       // {userid: usuario._id } se reemplaza por payload
        46       userid: id
        47     ];
        48     const token = jwt.sign(payload, process.env.JWTPRIVATEKEY, {
        49       expiresIn: '7d',
        50     }, function(err, token) {
        51       console.log(token);
        52       res.json(token);
        53     });
        54
        55     res.json({
        56       message: '🚀 Autenticación Exitosa 🚀',
        57       token: token
        58     })
        59     return token;
        60   }else {
        61     res.json({
        62       message: '⚠ Usuario y/o password son incorrectos.⚠'
        63     })
        64   }
        65
        66 }
        67
        68
        69
        70
        71 export default login;
```

Lín. 1, col. 1 Espacios: 4 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂ C

* usercontroller.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda userscontroller.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR ... JS app.js {} package.json M JS userscontroller.js X {} package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
    JS userscontroller.js
      JS userscontroller.js
        JS userscontroller.js > ...
        1 import { usuario } from '../models/usuarios.js';
        2
        3 // Registrar un usuario en la base de datos
        4 export const regusuario = (req, res) => {
        5   const user = usuario(req.body);
        6   user
        7     .save()
        8     .then((data) => res.json(data))
        9     .catch((error) => res.json({ message: error }));
        10  };
        11
        12 // Mostrar información de los usuarios
        13
        14 export const showuser = (req,res) => {
        15
        16   usuario
        17     .find()
        18     .then((data)=> res.json(data))
        19     .catch((error)=> res.json({message:error}));
        20  };
        21
        22 // Muestra la información de un usuario específico
        23
        24 export const shuserone = (req, res) => {
        25   const { id } = req.params;
        26   usuario
        27     .findById(id)
        28     .then((data) => res.json(data))
        29     .catch((error) => res.json({ message: error }));
        30  };
        31
        32 // Borrado de un usuario
        33
        34 export const deluser = (req, res) => {
        35   const { id } = req.params;
```

Lín. 1, col. 1 Espacios: 2 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂ C



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda userscontroller.js - heroku - Visual Studio Code [Administrador] □□□□□ | 08 - □ ...

EXPLORADOR ... JS app.js () package.json M JS userscontroller.js X () package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

HEROKU config jwtfunciones.js controllers eventcontrollers.js logincontrollers.js JS userscontroller.js JS usuariocontrollers.js Midwares auth.js eventos.js usuarios.js routes routes.js correo estacorreobien.js .env .gitignore app.js mongodb.js package-lock.json package.json M M

// Borraremos un usuario

```
const { id } = req.params;
usuario
  .findById(id)
  .then((data) => res.json(data))
  .catch((error) => res.json({ message: error }));
```

//Borramos un usuario

```
export const deluser = (req, res) => {
  const { id } = req.params;
  usuario
    .deleteOne({ _id: id })
    .then((data) => res.json(data))
    .catch((error) => res.json({ message: error }));
```

//Actualizar un usuario

```
export const upuser = (req, res) => {
  const { id } = req.params;
  const { nomuser, password, correo } = req.body;
  const user = this;
  const salt = bcrypt.genSaltSync(12);
  const hash = bcrypt.hashSync(password, salt);
  password = hash;
  usuario
    .updateOne({ _id: id }, { $set: { nomuser, password, correo } })
    .then((data) => res.json(data))
    .catch((error) => res.json({ message: error }));
```

export default regusuario;

Lín. 1, col. 1 Espacios: 2 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂ ⌂

*usuariocontrollers.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda usuariocontrollers.js - heroku - Visual Studio Code [Administrador] □□□□□ | 08 - □ ...

EXPLORADOR ... JS app.js () package.json M JS usuariocontrollers.js X () package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

HEROKU config jwtfunciones.js controllers eventcontrollers.js logincontrollers.js JS usuariocontrollers.js JS usuariocontrollers.js Midwares auth.js eventos.js usuarios.js routes routes.js correo estacorreobien.js .env .gitignore app.js mongodb.js package-lock.json package.json M M

// Registrar un usuario en la base de datos

```
import { usuario } from '../models/usuarios.js';
// Registrar un usuario en la base de datos
export const registruario = (req, res) => {
  const user = usuario(req.body);
  user
    .save()
    .then((data) => res.json(data))
    .catch((error) => res.json({ message: error }));
```

// Mostrar información de los usuarios

```
export const showuser = (req, res) => {
  usuario
    .find()
    .then((data) => res.json(data))
    .catch((error) => res.json({ message: error }));
```

//Muestra la información de un usuario específico

```
export const shuserone = (req, res) => {
  const { id } = req.params;
  usuario
    .findById(id)
    .then((data) => res.json(data))
    .catch((error) => res.json({ message: error }));
```

//Borramos un usuario

```
export const deluser = (req, res) => {
  const { id } = req.params;
```

Lín. 1, col. 1 Espacios: 2 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂ ⌂



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda usuariocontrollers.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR ... JS app.js () package.json M JS usuariocounters.js X () package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
    JS userscontroller.js
    JS usuariocounters.js
  Midwares
    JS auth.js
  models
    JS eventos.js
    JS usuarios.js
  node_modules
  routes
    JS routes.js
  vcorreo
    JS estacorreoebien.js
  .env
  .gitignore
  JS app.js
  JS mongodb.js
  {} package-lock.json M
  {} package.json M

  > ESQUEMA
  > LÍNEA DE TIEMPO
  > MYSQL

```

```

controllers > JS usuariocounters.js > ...
25   const { id } = req.params;
26   usuario
27     .findById(id)
28     .then((data) => res.json(data))
29     .catch((error) => res.json({ message: error }));
30   );
31
32 //Borramos un usuario
33
34 export const deluser = (req, res) => {
35   const { id } = req.params;
36   usuario
37     .deleteOne({ _id: id })
38     .then((data) => res.json(data))
39     .catch((error) => res.json({ message: error }));
40   );
41
42 //Actualizar un usuario
43 export const upuser = (req, res) => {
44   const { id } = req.params;
45   const { nomuser, password, correo } = req.body;
46   const user = this
47   const salt = bcrypt.genSaltSync(12);
48   const hash = bcrypt.hashSync(password, salt);
49   password = hash;
50   usuario
51     .updateOne({ _id: id }, { $set: { nomuser, password, correo } })
52     .then((data) => res.json(data))
53     .catch((error) => res.json({ message: error }));
54   );
55
56
57 export default regusuario;

```

Lín. 1, col. 1 Espacios: 2 UTF-8 CRLF () JavaScript Go Live

* Middlewares: auth.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda auth.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR ... JS app.js () package.json M JS auth.js X () package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
    JS userscontroller.js
    JS usuariocounters.js
  Midwares
    JS auth.js
  models
    JS eventos.js
    JS usuarios.js
  node_modules
  routes
    JS routes.js
  vcorreo
    JS estacorreoebien.js
  .env
  .gitignore
  JS app.js
  JS mongodb.js
  {} package-lock.json M
  {} package.json M

  > ESQUEMA
  > LÍNEA DE TIEMPO
  > MYSQL

```

```

Midwares > JS auth.js > ...
1 import jwt from "jsonwebtoken";
2 import { tokenVerificationErrors } from "../configs/jwtfunciones.js";
3
4 export const requireToken = (req, res, next) => {
5
6   try {
7     //let token = req.headers?.authorization;
8     //const token = localStorage.getItem("auth");
9     let token = req.headers?.authorization;
10    if (!token) throw new Error("No Bearer");
11    //let token = req.headers('x-auth-token');
12
13    //if (!token) throw new Error("No Bearer");
14
15    console.log(req.headers);
16    if (!token) {
17      res.status(400).json({msg : "Token no encontrado"});
18    }
19    token = token.split(" ")[1];
20    const { uid } = jwt.verify(token, process.env.JWTPRIVATEKEY);
21
22    req.uid = uid;
23    console.log(req.headers);
24    next();
25  } catch (error) {
26    console.log(error.message);
27    return res
28      .status(401)
29      .send({ error: tokenVerificationErrors[error.message] });
30  }
31}
32
33 export default requireToken;

```

Lín. 1, col. 1 Espacios: 4 UTF-8 CRLF () JavaScript Go Live



* models:

eventos.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda eventos.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR JS app.js package.json M JS eventos.js X package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

models > JS eventos.js > ...
1 import mongoose from "mongoose";
2 const eventoSchema = new mongoose.Schema(
3 {
4   fecha: {
5     type: Date,
6     require: true
7   },
8   equipo1: {
9     type: String,
10    require: true
11  },
12   equipo2: {
13     type: String,
14     require: true
15  },
16   marcador1: {
17     type: Number,
18   },
19   marcador2: {
20     type: Number,
21   },
22   tipoevento: {
23     type: String,
24     require: true
25   },
26   {
27     timestamps: true,
28     versionKey: false,
29   }
30 );
31 );
32
33 export const evento = mongoose.model('ceventos',eventoSchema)
34 export default evento;

```

Lin. 1, col. 1 Espacios:4 UTF-8 CRLF () JavaScript Go Live ⚡

usuarios.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda usuarios.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR JS app.js package.json M JS usuarios.js X package-lock.json M JS routes.js TC localhost:8000/reguser/ .env

```

models > JS usuarios.js > ...
1 import mongoose from 'mongoose';
2 import * as bcrypt from 'bcrypt';
3 //Import bcryptjs from "bcryptjs";
4 import {Valid} from '../vcorreo/estacorreobien.js'
5 const userSchema = new mongoose.Schema(
6   {
7     nomuser: {
8       type: String,
9       require: true
10    },
11    password: {
12      type: String,
13      require: true
14    },
15    correo: {
16      type: String,
17      require: true,
18      lowercase: true,
19      unique: true
20    },
21    emailVerified: {
22      type: Boolean,
23      default: false,
24    }
25  },
26  {
27    timestamps: true,
28    versionKey: false,
29  }
30 );
31
32 userSchema.methods.comparePassword = async function (password) {
33   return await bcrypt.compareSync(password, usuario.password);
34 };

```

Lin. 1, col. 1 Espacios:4 UTF-8 CRLF () JavaScript Go Live ⚡



node:modules

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda usuariosjs - heroku - Visual Studio Code [Administrador]

EXPLORADOR JS app.js package.json M JS usuariosjs X package-lock.json M JS routes.js TC localhost:8000/reguser/.env ...

HEROKU ...

models > JS usuariosjs > ...

```
1 import mongoose from 'mongoose';
2 import * as bcrypt from 'bcrypt';
3 //import bcryptjs from "bcryptjs";
4 import {Valid} from '../vcorneo/estacorreoobien.js'
5 const userSchema = new mongoose.Schema(
6   {
7     nomuser: {
8       type: String,
9       require: true
10    },
11    password: {
12      type: String,
13      require: true
14    },
15    correo: {
16      type: String,
17      require: true,
18      lowercase: true,
19      unique: true
20    },
21    emailVerified: {
22      type: Boolean,
23      default: false,
24    }
25  },
26  {
27    timestamps: true,
28    versionKey: false,
29  }
30);
31
32 userSchema.methods.comparePassword = async function (password) {
33   return await bcrypt.compareSync(password, usuario.password);
34 };
```

Línea de tiempo

MySQL

master* Git Graph Lin.1, col.1 Espacios:4 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂

*routes: routes.js

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda routes.js - heroku - Visual Studio Code [Administrador]

EXPLORADOR JS app.js package.json M JS usuariosjs package-lock.json M JS routes.js X TC localhost:8000/reguser/.env ...

HEROKU ...

routes > JS routes.js > ...

```
1 import express from 'express';
2 import { regusuario, showuser, shuserone, deluser, upuser } from '../controllers/userscontroller.js';
3 import { regevento, shevento, shonevent, delevento, upevento } from '../controllers/eventcontrollers.js';
4 import { login, loginjwt } from '../controllers/logincontrollers.js';
5 import { requireToken } from '../middlewares/auth.js';
6 import { db } from '../mongodb.js';
7
8
9
10 export const router = express.Router();
11
12
13 //rutas collection usuarios
14 //router.post('/login1',requireToken, loginjwt );
15 router.post('/login', login );
16
17 //funciona
18 router.post('/reguser', regusuario);
19 router.get('/shuser',requireToken, showuser);
20 //funciona
21 //router.get('/shuser', showuser);
22 //funciona
23 router.get('/shuser/:id', shuserone);
24 //funciona
25 router.delete('/shuser/:id', deluser);
26 router.put('/shuser/:id', upuser);
27
28 //rutas para los eventos deportivos
29 //funciona
30 //router.post('/regevento', regevento);
31 router.get('/shevento',requireToken, shevento);
32 //funciona
33 //router.get('/shevento', shevento);
34 //funciona
35 router.get('/shevento/:id', shevento);
```

Línea de tiempo

MySQL

master* Git Graph Lin.30, col.40 Espacios:4 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂



The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure with files like app.js, package.json, package-lock.json, and various controller and middleware files.
- Editor (Center):** Displays the content of routes.js, which defines an Express Router for handling user-related routes.
- Terminal (Bottom Left):** Shows the command "master" followed by several small icons.
- Status Bar (Bottom Right):** Shows the file path "routes.js - heroku - Visual Studio Code [Administrador]", line count "Lin. 30, col. 40", character count "Espacios: 4", encoding "UTF-8", and file type "JavaScript".

```
routes > routes.js > ...
7
8
9
10 export const router = express.Router();
11
12 //rutas collection usuarios
13 //router.post('/login',requireToken, loginjwt );
14 router.post('/login', login );
15
16 //funciona
17 router.post('/reguser', regusuario);
18 router.get('/shuser',requireToken, showuser);
19 //funciona
20 //router.get('/shuser', showuser);
21 //funciona
22 //funciona
23 router.get('/shuser/:id', shuserone);
24 //funciona
25 router.delete('/shuser/:id',deluser);
26 router.put('/shuser/:id', upuser);
27
28 //rutas para los eventos deportivos
29 //funciona
30 //router.post('/regevento', regevento);
31 router.get('/shevento',requireToken, shevento);
32 //funciona
33 //router.get('/shevento', shevento);
34 //funciona
35 router.get('/shevento/:id', shonevent);
36 //funciona
37 router.delete('/delevento/:id', delevento);
38 router.put('/upevento/:id', upevento);
39
40 export default router;
```

*vcorreo: estacorreobien.js



.env

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda .env - heroku - Visual Studio Code [Administrador]

EXPLORADOR ... package.json M package-lock.json routes.js estacorreobien.js localhost:8000/reguser/.env

HEROKU .env

- config
 JWTfunciones.js
- controllers
 eventcontrollers.js
 logincontrollers.js
 userscontroller.js
 usuariocontrollers.js
- Middlewares
 auth.js
- models
 eventos.js
 usuarios.js
 node_modules
- routes
 routes.js
- vcorreo
 estacorreobien.js

.env .gitignore app.js mongodb.js package-lock.json package.json

LINERA DE TIEMPO MySQL

Lín. 2, Col. 60 (43 seleccionada) Espacios:4 UTF-8 CRLF Properties Go Live

This screenshot shows a Visual Studio Code window with the title '.env - heroku - Visual Studio Code [Administrador]'. The left sidebar displays a file tree for a project named 'HEROKU'. The '.env' file is selected and highlighted with a blue border. The main editor area contains two lines of environment variable definitions:

```
1 MON_DBURI = mongodb+srv://mariacamilaea:ciclo4desarrollo@cluster0.36opdu7.mongodb.net/dbeventos?retryWrites=1
2 JWTPRIVATEKEY = AhglxhJ068zLDOgulSyIumKRQh486PAxXX3wQiszQhk
```

The status bar at the bottom shows the current line and column (Lín. 2, Col. 60), encoding (Espacios:4), and file encoding (UTF-8). There are also buttons for CRLF, Properties, Go Live, and other code-related functions.



gitignore

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer:** On the left, it displays a hierarchical file structure:
 - HEROKU**:
 - configs: `jwtfunciones.js`
 - controllers: `eventcontroller.js`, `logincontroller.js`, `userscontroller.js`, `usuariocontroller.js`
 - Middlewares: `auth.js`
 - models: `eventos.js`, `usuarios.js`
 - routes: `routes.js`
 - vcorreo: `estacorreoebien.js`
 - gitignore** (selected):
 - `node_modules`
 - `.env`
 - Other files:** `app.js`, `mongodb.js`, `package-lock.json`, `package.json`.
- Tabs:** At the top, there are several tabs: `gitignore - heroku - Visual Studio Code [Administrador]`, `package.json M`, `package-lock.json M`, `routes.js`, `localhost:8000/reguser/ .env`, and `.gitignore JS`.
- Status Bar:** At the bottom, it shows the current file path as `master* package.json`, file statistics (`0 0 0`), and other settings like Git Graph, ESQUEMA, LÍNEA DE TIEMPO, and MYSQL.
- Bottom Icons:** Standard VS Code icons for file operations like Open, Save, Find, and others.

app.js

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer (Left):** Shows the project structure with files like app.js, package.json, routes.js, .env, and .gitignore.
- Editor (Center):** Displays the content of app.js, which is a Node.js application using Express. It includes code for connecting to MongoDB, setting up CORS, and defining a route that sends a deployment message to Heroku.
- Terminal (Bottom):** Shows the command "master" and other terminal-related icons.

```
import express from 'express';
import {db} from './mongodb.js';
import cors from 'cors';
import {router} from './routes/routes.js'

const app = express();
app.use(cors());
app.use(express.json());
app.use('/usuarios',router);

router.get('/', (req,res) => {
    res.send("🚀 Deploy en Heroku 🚀")
})

var PORT = process.env.PORT || 8000;
app.listen(PORT, ()=> {
    console.log(`Conectado en el servidor: http://localhost:${PORT}`)
})
```



mongodb.js

mongodb.js - heroku - Visual Studio Code [Administrador]

```
EXPLORADOR          package.json M  package-lock.json M  routes.js  localhost:8000/reguser/  .env  .gitignore  JS mongodb.js  D...  ...
HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
    JS usuarioscontroller.js
    JS usuariocontrollers.js
  Midlwares
    JS auth.js
  models
    JS eventos.js
    JS usuarios.js
  node_modules
  routes
    JS routes.js
  vcorreo
    JS estacorreobien.js
  .env
  .gitignore
  JS app.js
JS mongodb.js
  {} package-lock.json M
  {} package.json M

ESQUEMA
LÍNEA DE TIEMPO
MYSQL
```

Lín. 1, col. 1 Espacios: 4 UTF-8 CRLF {} JavaScript ⌂ Go Live ⌂ ⌂

package-lock.json

package-lock.json - heroku - Visual Studio Code [Administrador]

```
EXPLORADOR          package.json M  package-lock.json > {} packages  routes.js  localhost:8000/reguser/  .env  .gitignore  JS mongodb.js  D...  ...
HEROKU
  configs
    JS jwtfunciones.js
  controllers
    JS eventcontrollers.js
    JS logincontrollers.js
    JS usuarioscontroller.js
    JS usuariocontrollers.js
  Midlwares
    JS auth.js
  models
    JS eventos.js
    JS usuarios.js
  node_modules
  routes
    JS routes.js
  vcorreo
    JS estacorreobien.js
  .env
  .gitignore
  JS app.js
  JS mongodb.js
  {} package-lock.json M
  {} package.json M

ESQUEMA
LÍNEA DE TIEMPO
MYSQL
```

Lín. 767, col. 7 Espacios: 2 UTF-8 LF {} JSON ⌂ Go Live ⌂ ⌂



package.json

A screenshot of the Visual Studio Code interface. The title bar says "package.json - heroku - Visual Studio Code [Administrador]". The left sidebar shows a file tree with a "HEROKU" folder containing various JavaScript files like "jwtfunciones.js", "eventcontrollers.js", "logincontrollers.js", etc., along with ".env" and ".gitignore" files. The main editor area displays the content of the "package.json" file:

```
1  {
2    "name": "heroku",
3    "version": "1.0.0",
4    "main": "app.js",
5    "type": "module",
6    "scripts": {
7      "start": "node app.js",
8      "test": "echo \\\"Error: no test specified\\\" && exit 1"
9    },
10   "keywords": [],
11   "author": "",
12   "license": "ISC",
13   "dependencies": {
14     "bcrypt": "^5.1.0",
15     "cors": "^2.8.5",
16     "dotenv": "^16.0.3",
17     "express": "^4.18.2",
18     "jsonwebtoken": "^8.5.1",
19     "mongoose": "^6.8.0"
20   },
21   "description": ""
22 }
```

The status bar at the bottom shows "Lín. 3, col. 22 Espacios: 2 UTF-8 LF () JSON ⌂ Go Live ⌂ C".



CONEXIÓN REALIZADA

localhost:8000/reguser/ - heroku - Visual Studio Code [Administrador]

```

THUNDER CLIENT PROBLEMAS SALIDA TERMINAL JUPITER CONSOLA DE DEPURACIÓN
New Request Env
Activity Collections Env
filter activity
POST localhost:8000/reguser/ just now
GET thunderclient.com/welcome 20 days ago
La conexión fue realizada ✓ con éxito a la bd:
No Bearer
el correo es : lucerog@outlook.com
el password es : 12345
{
  _id: new ObjectId("638bce111a80627ad543a25d"),
  nomuser: 'Lucero Gambo',
  password: '$2b$12$cumKElpAZJftTQxBDq/qSR.QS3KVfUBs8DAxZMGhF3ig5zwe7yrOxw',
  correo: 'lucerog@outlook.com',
  emailVerified: false,
  createdAt: 2022-12-03T22:30:41.899Z,
  updatedAt: 2022-12-03T22:30:41.899Z
}
El valor del password es: 12345
El valor de la comparación del password es: true
Mi token es: eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpYXQiOjE2NzA2ODQ4MjksImV4cCI6MTY3MDY4NjYyOX0.5Qr880z6J0M8_QASFv0IbJtb0cshiphQ3iuJIcNHZ-Q

```

master 0 △ 0 Git Graph Go Live

HEROKU

Salesforce Platform

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

GitHub repo mariacamilaea/herokumarcadoresdeportivos

Heroku git URL <https://git.heroku.com/marcadores-deportivos.git>

Config Vars

Config vars change the way your app behaves. In addition to creating your own, some add-ons come with their own.

KEY	VALUE	Add
MON_DBURI	mongodb+srv://mariacamilaea:ciclo4desar...	
JWTPRIVATEKEY	Ahg1xhJ068zLDQgulSyIumKRQh486PAxXX3wQis...	
KEY	VALUE	Add

Buildpacks

Buildpacks are scripts that are run when your app is deployed. They are used to install dependencies for your app and configure your environment. [Find new buildpacks on Heroku Elements](#)

Add buildpack

heroku/nodejs



MODIFICACIONES EN EL FRONTEND

- **src:**

*CrearEventos.jsx

```
const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/regevento'
```

```
Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda CrearEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador] Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda CrearEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador]
```

```
EXPLORADOR Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda CrearEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador]
```

```
FRONTENDMARCADO... > build > node_modules > public > favicon.ico > index.html > logo192.png > logo512.png > manifest.json > robots.txt > src > deportes > Admin.jsx > CrearEventos.jsx > Crearusuarios.jsx > EditarEvento.jsx > Editarusuario.jsx > Login.jsx > Logo.jsx > Mostrareventos.jsx > Mostrarusuarios.jsx > NavbarComp.jsx > Presentacion.jsx > App.css > App.js > App.test.js > index.css > index.js > ESQUEMA > LÍNEA DE TIEMPO > MYSQL
```

```
src > deportes > CrearEventos.jsx > CompCreateEvento
  1 import axios from 'axios'
  2 import { useState } from 'react'
  3 import { useNavigate } from 'react-router-dom'
  4 import Form from 'react-bootstrap/Form'
  5 import Button from 'react-bootstrap/Button'
  6 import Swal from 'sweetalert2'
  7 import Card from 'react-bootstrap/Card'
  8
  9
 10 //const URI = 'http://localhost:8000/usuarios/regevento'
 11 const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/regevento'
 12 export const CompCreateEvento = () => {
 13
 14   const [fecha, setFecha] = useState('')
 15   const [equipo1, setEquipo1] = useState('')
 16   const [equipo2, setEquipo2] = useState('')
 17   const [marcador1, setMarcador1] = useState('')
 18   const [marcador2, setMarcador2] = useState('')
 19   const [tipoevento, setTipoevento] = useState('')
 20   const navigate = useNavigate()
 21
 22   //procedimiento guardar
 23   const store = async (e) => {
 24     e.preventDefault()
 25     await axios.post(URI, {fecha: fecha, equipo1: equipo1, equipo2: equipo2, marcador1: marcador1, marcador2: marcador2, tipoevento: tipoevento})
 26     navigate('/shevento')
 27   }
 28   return (
 29     <div className="login-form" >
 30       <Card style={{ width: '40rem' }}>
 31         <Card.Body>
 32           <h3>Creación de Eventos Deportivos</h3>
 33           <Form onSubmit={store}>
 34             <Form.Group className="mb-3" >
```

El número de regiones que se pueden plegar está limitado a un máxi...

```
Lín. 20, col. 39 Espacios: 4 UTF-8 CRLF () JavaScript React ⌂ Go Live ⌂ ⌂
```



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda CrearEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador] ☐ ☐ ☐ | 08 — ☐ ☐ ☐ ...

EXPLORADORjs M JS App.test.jsx M # index.css M JS index.jsx M JS reportWebVitals.jsx M JS setupTests.jsx M ☐ CrearEventos.jsx M × ☐ ☐ ☐ ...

```

src > deportes > CrearEventos.jsx > ...
  70   </div>
  71   </div>
  72   <Form.Control
  73     value={marcador2}
  74     onChange={(e) => setMarcador2(e.target.value)}
  75     type="text"
  76     placeholder="Ingrese Marcador E2"
  77   </Form.Control>
  78   <Form.Control
  79     value={tipoevento}
  80     onChange={(e) => setTipoevento(e.target.value)}
  81     type="text"
  82     placeholder="Evento deportivo"
  83   </Form.Control>
  84   <Button variant="primary" size="lg" type="submit">Guardar</Button>
  85 </Form.Group>
  86 </Card.Body>
  87 </Card>
  88 </div>
  89 <export default CompCreateEvento>
  90
  91
  92
  93
  94
  95
  96
  97
  98
  99
 100
 101
 102 export default CompCreateEvento
  
```

⚠️ El número de regiones que se pueden plegar está limitado a un máxi...

Lin. 11, Col. 1 (76 seleccionada) Espacios: 4 UTF-8 CRLF ⓘ JavaScript React ⓘ Go Live ⓘ

*Crearusuarios.jsx

```
const URI = ' https://marcadores-deportivos.herokuapp.com/usuarios/reguser'
```

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Crearusuarios.jsx - frontendmarcadores - Visual Studio Code [Administrador] ☐ ☐ ☐ | 08 — ☐ ☐ ☐ ...

EXPLORADORcss M JS index.jsx M JS reportWebVitals.jsx M JS setupTests.jsx M ☐ CrearEventos.jsx M × ☐ ☐ ☐ ...

```

src > deportes > Crearusuarios.jsx > CompCreateUser
  1 import axios from 'axios'
  2 import { useState, useEffect } from 'react'
  3 import { useNavigate } from 'react-router-dom'
  4 import Form from 'react-bootstrap/Form'
  5 import Button from 'react-bootstrap/Button'
  6 import Swal from 'sweetalert2'
  7 import Card from 'react-bootstrap/Card';
  8 //import './src/style.css';
  9 //import './style.css';
 10
 11 //const URI = 'http://localhost:8000/usuarios/reguser'
 12 const URI = ' https://marcadores-deportivos.herokuapp.com/usuarios/reguser'
 13 export const CompCreateUser = () => {
 14
 15   const [correo, setContent] = useState('')
 16   const [nomuser, setNomuser] = useState('')
 17   const [password, setPassword] = useState('')
 18   const navigate = useNavigate()
 19
 20   //procedimiento guardar
 21   const store = async (e) => {
 22     e.preventDefault()
 23     Swal.fire({
 24       title: 'Guardar Usuario',
 25       text: 'Está seguro de guardar su información?',
 26       icon: 'question',
 27       showDenyButton: true,
 28       denyButtonText: "NO",
 29       confirmButtonText: "SI",
 30     }).then((response) => {
 31       if(response.isConfirmed){
 32         axios.post(URI, {correo:correo, nomuser:nomuser, password:password})
 33       }
 34     })
 35   }
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
  
```

⚠️ El número de regiones que se pueden plegar está limitado a un máxi...

Lin. 17, col. 46 Espacios: 4 UTF-8 CRLF ⓘ JavaScript React ⓘ Go Live ⓘ



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Crearusuarios.jsx - frontendmarcadores - Visual Studio Code [Administrador] □ □ □ | 08 — □ ...

EXPLORADOR ... # index.css M JS index.js M JS reportWebVitals.js M JS setupTests.js M CrearEventos.jsx M Crearusuarios.jsx M □ ...

FRONTENDMARCADORES

> build
> node_modules
✓ public
 ★ favicon.ico
 index.html M
 logo192.png
 logo512.png
 manifest.json
 robots.txt
✓ src
 ✓ deportes
 Admin.jsx
 CrearEventos.jsx M
 Crearusuarios.jsx M
 EditarEvento.jsx U
 Editarusuario.jsx U
 Login.jsx M
 Logo.jsx
 MostrarEventos.jsx M
 Mostrarusuarios.jsx M
 NavbarComp.jsx
 Presentacion.jsx
 # App.css M
 JS App.js M
 JS App.test.js M
 # index.css M
 JS index.js M
> ESQUEMA
> LÍNEA DE TIEMPO
> MYSQL

src > deportes > Crearusuarios.jsx > CompCreateUser

```
63                 </div>
64                 <div>
65                     <Form.Control
66                         value={correo}
67                         onChange={( e)=> setContent(e.target.value)}
68                         type="email"
69                         placeholder = "email"
70                     />
71                 </div>
72                 <div>
73                     <Form.Control
74                         value={password}
75                         onChange={( e)=> setPass(e.target.value)}
76                         type = "password"
77                         placeholder = "Password"
78                     />
79                 </div>
80                 <Button  variant="primary" type="submit" className="btn-register">Guardar</Button>
81             </Form.Group>
82             </Form>
83             </Card.Body>
84         </Card>
85     </div>
86     )
87 )
88 )
89 )
90 )
91 )
92 )
93 )
94 export default CompCreateUser
```

⚠ El número de regiones que se pueden plegar está limitado a un máxi... Lin. 16, col. 2 Espacios: 4 UTF-8 CRLF () JavaScript React Go Live ⚙

* EditarEvento.jsx

```
//const URI = 'http://localhost:8000/usuarios/upevento/'
const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/upevento/'
//Ruta para mostrar la información del evento deportivo antes de modificarlo
//const URI2 = 'http://localhost:8000/usuarios/shevento/'
const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/shevento/'
```



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda EditarEvento.jsx - frontendmarcadores - Visual Studio Code [Administrador]

EXPLORADOR

```
src > deportes > EditarEvento.jsx > CompEditEvento
  1 import axios from "axios";
  2 import { useEffect, useState } from "react";
  3 import { useNavigate, useParams } from "react-router-dom";
  4 import Button from 'react-bootstrap/Button';
  5 import Form from 'react-bootstrap/Form';
  6 import Card from 'react-bootstrap/Card';
  7 //Ruta para modificar "Actualizar" el evento
  8 //const URI = 'http://localhost:8000/usuarios/upevento'
  9 const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/upevento'
10 //Ruta para mostrar la información del evento deportivo antes de modificarlo
11 //const URI2 = 'http://localhost:8000/usuarios/shevento'
12 const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/shevento'

export const CompEditEvento = () => {
  const [fecha, setFecha] = useState('')
  const [equipo1, setEquipo1] = useState('')
  const [equipo2, setEquipo2] = useState('')
  const [marcador1, setMarcador1] = useState('')
  const [marcador2, setMarcador2] = useState('')
  const [tipoevento, setTipoevento] = useState('')

  const navigate = useNavigate()
  const {_id} = useParams()
  console.log('el valor del id es : ', _id)
  //procedimiento para actualizar
  const onSubmit = async (e) => {
    e.preventDefault()
    await axios.put(URI+_id, {
      fecha: fecha,
      equipo1: equipo1,
      equipo2: equipo2,
      marcador1: marcador1,
      marcador2: marcador2,
      tipoevento:tipoevento
    })
  }
}
```

El número de regiones que se pueden plegar está limitado a un máxi...

Lín 15, col. 47 Espacios:4 UTF-8 CRLF ⓘ JavaScriptReact ⓘ Go Live ⓘ

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda EditarEvento.jsx - frontendmarcadores - Visual Studio Code [Administrador]

EXPLORADOR

```
src > deportes > EditarEvento.jsx > CompEditEvento
  94
  95
  96
  97
  98
  99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
```

El número de regiones que se pueden plegar está limitado a un máxi...

Lín. 19, col. 54 Espacios:4 UTF-8 CRLF ⓘ JavaScriptReact ⓘ Go Live ⓘ



* Editarusuario.jsx

```
//const URI = 'http://localhost:8000/usuarios/shuser/'  
const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/shuser/'  
//const URI2 = 'http://localhost:8000/usuarios/upuser/'  
const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/upuser/'
```

```
Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Editarusuario.jsx - frontendmarcadores - Visual Studio Code [Administrador]  
EXPLORADOR ... $ setupTests.js M ⚡ CrearEventos.jsx M ⚡ Admin.jsx ⚡ Crearusuarios.jsx M ⚡ EditarEvento.jsx U ⚡ Editarusuario.jsx U ...  
FRONTENDMARCADORES  
> build  
> node_modules  
✓ public  
  ★ favicon.ico  
  < index.html M  
  logo192.png  
  logo512.png  
  manifest.json  
  robots.txt  
✓ src  
  < deportes  
    ⚡ Admin.jsx  
    ⚡ CrearEventos.jsx M  
    ⚡ Crearusuarios.jsx M  
    ⚡ EditarEvento.jsx U  
    ⚡ Editarusuario.jsx U  
    ⚡ Login.jsx M  
    ⚡ Logo.jsx  
    ⚡ MostrarEventos.jsx M  
    ⚡ Mostrarusuarios.jsx M  
    ⚡ NavbarComp.jsx  
    ⚡ Presentacion.jsx  
  # App.css M  
  JS App.js M  
  JS App.test.js M  
  # index.css M  
  JS index.js M  
  > ESQUEMA  
  > LÍNEA DE TIEMPO  
  > MYSQL  
Lin. 5, Col. 1 (264 seleccionada) Espacios: 4 UTF-8 CRLF () JavaScript React ⚡ Go Live ⚡ C
```

Mostrareventos.jsx

```
//const URI = 'http://localhost:8000/usuarios/shevento/'  
const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/shevento/'  
//eliminar un evento deportivo  
//const URI2 = 'http://localhost:8000/usuarios/delevento/'  
const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/delevento/'
```



MostrarEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador]

```
src > deportes > MostrarEventos.jsx > ...
1 //importamos las librerias
2 import axios from 'axios'
3 import {useState, useEffect} from 'react'
4 import {Link} from 'react-router-dom'
5 import Table from 'react-bootstrap/Table';
6 import { FaTrashAlt, FaPencilAlt, FaRegEdit } from 'react-icons/fa';
7 import Swal from 'sweetalert2';

8 //importar nuestras rutas del backend
9 //importar los eventos deportivos
10 //const URI = 'http://localhost:8000/usuarios/shevento/'
11 const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/shevento/'
12 //eliminar un evento deportivo
13 //const URI2 = 'http://localhost:8000/usuarios/delevento/'
14 const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/delevento/'
15 //procedimientos para mostrar los eventos deportivos
16
17 export const CompMostrarEvento = () => {

    //Aca enviamos el Token como un Header
18
19 const token1 = localStorage.getItem("auth")
20 const token = `${token1}`;
21 const beer = "Bearer"
22 let axiosConfig = {
23     headers: {
24         'Content-Type': 'application/json;charset=UTF-8',
25         'accept': 'application/json',
26         //Authorization: 'Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpYXQiOjE2Njk0NjcxMzs1MjI6MTY2OTQ
27         'Authorization': `${beer} ${token}`,
28     }
29 };
30
31 }

32
33 const [ceventos, setBlog] = useState([])
34 useEffect( ()=>{
35     getBlog()
36 })
```

El número de regiones que se pueden plegar está limitado a un máximo...

MostrarEventos.jsx - frontendmarcadores - Visual Studio Code [Administrador]


```
src > deportes > MostrarEventos.jsx > ...
83             <th>Marcador E2</th>
84             <th>Tipo Evento</th>
85         </tr>
86     </thead>
87     <tbody>
88         { ceventos.map( (blog) => (
89             <tr key={ blog._id }>
90                 <td> { blog.fecha } </td>
91                 <td> { blog.equipo1 } </td>
92                 <td> { blog.equipo2 } </td>
93                 <td> { blog.marcador1 } </td>
94                 <td> { blog.marcador2 } </td>
95                 <td> { blog.tipoevento } </td>
96             <td>
97                 <Link to={`/editevento/${blog._id}`}><i className="fas fa-edit" /></Link>
98             </td>
99             <td>
100                 <button onClick={ () => deleteBlog(blog._id) } className="btn btn-danger">Borrar</button>
101             </td>
102         ) )
103     ) )
104     </tbody>
105 </Table>
106 </div>
107 </div>
108 )
109
110
111
112 }
113
114 //exportar nuestro componente
115 export default CompMostrarEvento
```

El número de regiones que se pueden plegar está limitado a un máximo...



Mostrarusuarios.jsx

```
//const URI = 'http://localhost:8000/usuarios/shuser/'  
const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/shuser/'  
//const URI2 = 'http://localhost:8000/usuarios/deluser/'  
const URI2 = 'https://marcadores-deportivos.herokuapp.com/usuarios/deluser/'
```

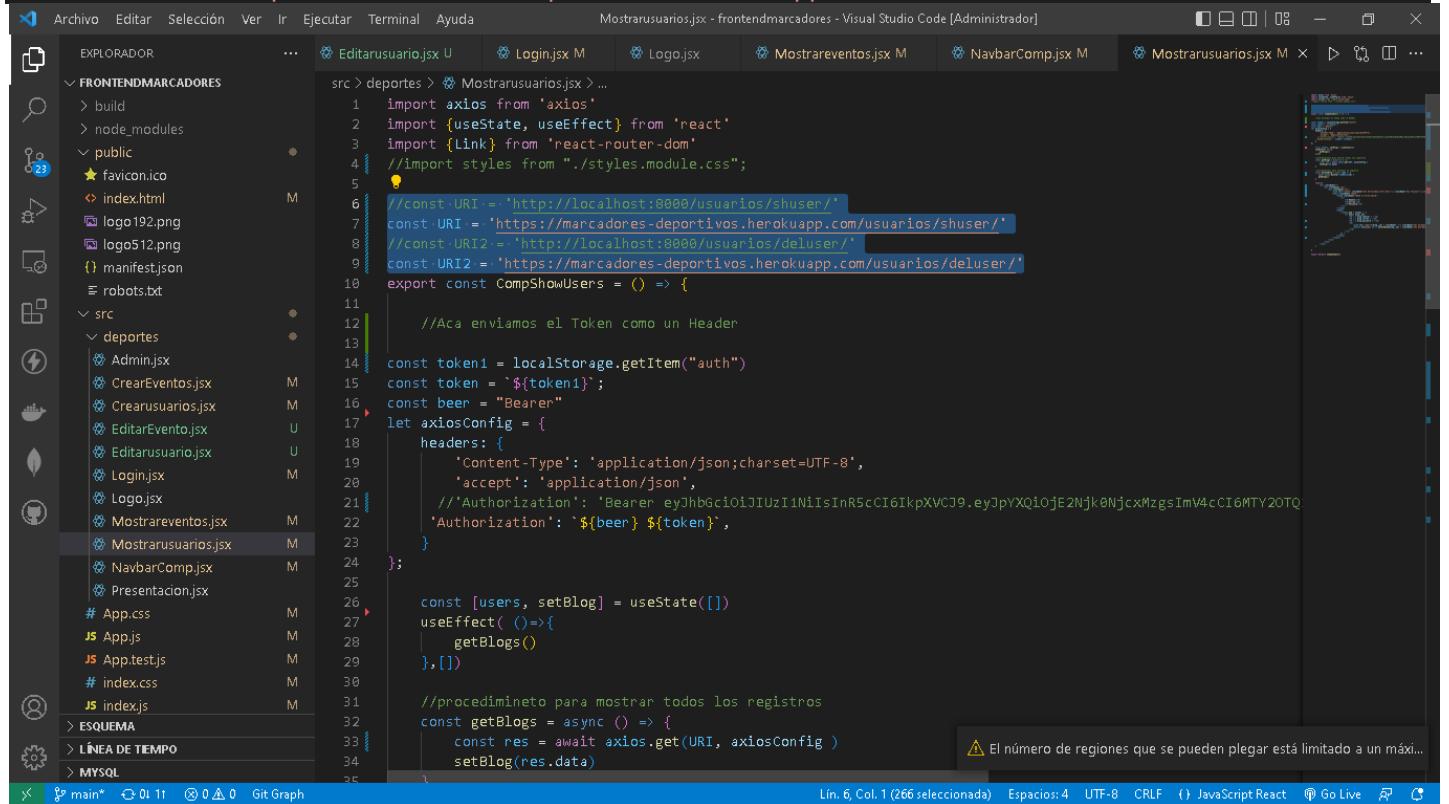

```
Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Mostrarusuarios.jsx - frontendmarcadores - Visual Studio Code [Administrador]  
EXPLORADOR ... Mostrarusuarios.jsx U Loginjsx M Logojsx Mostrareventosjsx M NavbarComp.jsx M Mostrarusuarios.jsx M ...  
FRONTENDMARCADORES > build > node_modules < Mostrarusuarios.jsx U < Loginjsx M < Logojsx < Mostrareventosjsx M < NavbarComp.jsx M < Mostrarusuarios.jsx M ...  
< public <* <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
★ favicon.ico <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
index.html M Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
logo192.png Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
logo512.png Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
{ manifest.json Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
robots.txt Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
< src <* <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
< deportes <* <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Admin.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
CrearEventos.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Crearusuarios.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
EditarEvento.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Editarusuario.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Login.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Logo.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Mostrareventos.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Mostrarusuarios.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
NavbarComp.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
Presentacion.jsx Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
# App.css Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
JS App.js Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
JS App.test.js Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
# index.css Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
JS index.js Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
> ESQUEMA <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
> LÍNEA DE TIEMPO <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
> MYSQL <* Mostrarusuarios.jsx U <* Loginjsx M <* Logojsx <* Mostrareventosjsx M <* NavbarComp.jsx M <* Mostrarusuarios.jsx M ...  
X main* 0 11 0 0 0 Git Graph
```

Lín. 6, Col. 1 (266 seleccionada) Espacios:4 UTF-8 CRLF () JavaScript React ⚡ Go Live ⚡ ⚡



Screenshot of Visual Studio Code showing the file 'Mostrarusuarios.jsx' open. The code is a React component for displaying user data from a database. It uses a table to show columns for Nombre, Correo, and Password, with links for edit and delete actions. A warning message at the bottom indicates that folding regions are limited.

```
src > deportes > Mostrarusuarios.jsx <div className='row'>
  <div className='col'>
    <Link to="/create" className='btn btn-primary mt-2 mb-2'><i className="fas fa-plus"></i></Link>
    <table className='table'>
      <thead className='thead tr:first-child'>
        <tr>
          <th>Nombre</th>
          <th>Correo</th>
          <th>Password</th>
        </tr>
      </thead>
      <tbody>
        { users.map( (blog) => (
          <tr key={ blog._id }>
            <td> { blog.nomuser } </td>
            <td> { blog.correo } </td>
            <td> { blog.password } </td>
            <td>
              <Link to={`/edit/${blog._id}`}><i className="fas fa-edit"></i></Link>
              <button onClick={ () => deleteBlog(blog._id) } className='btn btn-danger'><i className="fas fa-trash"></i></button>
            </td>
          </tr>
        )) }
      </tbody>
    </table>
  </div>
</div>
)
export default CompShowUsers
```

Login.jsx

```
//const URI = 'http://localhost:8000/usuarios/login'
const URI = 'https://marcadores-
deportivos.herokuapp.com/usuarios/login'
```



Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Login.jsx - frontendmarcadores - Visual Studio Code [Administrador]

EXPLORADOR

FRONTENDMARCADORES

- Crearusuarios.jsx M
- EditarEvento.jsx U
- Editarusuario.jsx U
- Login.jsx M
- Logo.jsx
- Mostrareventos.jsx
- Mostrarusuarios.jsx
- NavbarComp.jsx
- Presentacion.jsx
- # App.css M
- JS App.js M
- JS App.test.js M
- # index.css M
- JS index.jsx M
- logo.svg
- JS reportWebVitals.js M
- JS setupTests.js M
- .dockerignore
- .gitignore
- config.yml U
- Dockerfile
- hs_err_pid6452.log U
- { package-lock.json M
- { package.json M
- README.md
- { vercel.json

ESQUEMA

LÍNEA DE TIEMPO

MySQL

```
src > deportes > Login.jsx > Login > onSubmit
  const mostrarAlerta = () => {
    Swal.fire ("Mensaje Simple")
  }
  //*****
  const onSubmit = async (e) => {
    e.preventDefault();
    try{
      let axiosConfig = {
        headers: {
          'Content-Type': 'application/json;charset=UTF-8',
          "Access-Control-Allow-Origin": "*",
        }
      };
      //const URI = 'http://localhost:8000/usuarios/login'
      const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/login'

      console.log("paso por aca")
      console.log (axiosConfig);
      const resp = await axios.post(URI, body, axiosConfig );
      let s = JSON.stringify(resp.data);
      console.log ("este es mi Token arr ",s);

      let union1 = s.split(":")[2];

      let r = union1.substring(1, union1.length-3);
      console.log('Este es el JWT:',r);
      localStorage.setItem('auth',r)
      navigate('/shevento')
      window.location = '/shevento'
    }
  }
```

Lin. 62, col. 40 Espacios: 4 UTF-8 CRLF {} JavaScriptReact Go Live

Archivo Editar Selección Ver Ir Ejecutar Terminal Ayuda Login.jsx - frontendmarcadores - Visual Studio Code [Administrador]

EXPLORADOR

FRONTENDMARCADORES

- Crearusuarios.jsx M
- EditarEvento.jsx U
- Editarusuario.jsx U
- Login.jsx M
- Logo.jsx
- Mostrareventos.jsx
- Mostrarusuarios.jsx
- NavbarComp.jsx
- Presentacion.jsx
- # App.css M
- JS App.js M
- JS App.test.js M
- # index.css M
- JS index.jsx M
- logo.svg
- JS reportWebVitals.js M
- JS setupTests.js M
- .dockerignore
- .gitignore
- config.yml U
- Dockerfile
- hs_err_pid6452.log U
- { package-lock.json M
- { package.json M
- README.md
- { vercel.json

ESQUEMA

LÍNEA DE TIEMPO

MySQL

```
src > deportes > Login.jsx > Login > onSubmit
  //*****
  const mostrarAlerta = () => {
    Swal.fire ("Mensaje Simple")
  }
  //*****
  const onSubmit = async (e) => {
    e.preventDefault();
    try{
      let axiosConfig = {
        headers: {
          'Content-Type': 'application/json;charset=UTF-8',
          "Access-Control-Allow-Origin": "*",
        }
      };
      //const URI = 'http://localhost:8000/usuarios/login'
      const URI = 'https://marcadores-deportivos.herokuapp.com/usuarios/login'

      console.log("paso por aca")
      console.log (axiosConfig);
      const resp = await axios.post(URI, body, axiosConfig );
      let s = JSON.stringify(resp.data);
      console.log ("este es mi Token arr ",s);

      let union1 = s.split(":")[2];

      let r = union1.substring(1, union1.length-3);
      console.log('Este es el JWT:',r);
      localStorage.setItem('auth',r)
      navigate('/shevento')
      window.location = '/shevento'
    }
  }
```

Lin. 65, col. 37 Espacios: 4 UTF-8 CRLF {} JavaScriptReact Go Live



.dockerignore

The screenshot shows the Visual Studio Code interface with the following details:

- File Explorer:** On the left, it displays a tree view of files and folders. The `.dockerignore` file is currently selected.
- Editor:** The main editor area shows the contents of the `.dockerignore` file, which includes entries for `node_modules` and `npm-debug.log`.
- Status Bar:** At the bottom, there is a warning message: "El número de regiones que se pueden plegar está limitado a un máximo..." (The number of regions that can be folded is limited to a maximum...).

dockerfile

The screenshot shows a Visual Studio Code interface with the following details:

- File Explorer:** On the left, it lists files and folders. The folder "FRONTEENDMARCADORES" contains several JSX files like "Crearusuarios.jsx", "EditarEvento.jsx", etc., and some JSON files like "package-lock.json", "package.json", and "vercel.json". It also includes "Dockerfile", ".dockerignore", ".gitignore", and "config.yml".
- Code Editor:** The main editor area displays the "Dockerfile" content:

```
FROM node:18.12
WORKDIR /app
COPY package*.json .
RUN npm install
COPY .
CMD ["npm", "start"]
```
- Status Bar:** At the bottom, there are status icons and text: "Activando extensiones..", "main", "0 L 11", "Git Graph", "Activando extensiones..", "Lin. 1, col. 1 Espacios: 4 UTF-8 CRLF Dockerfile Go Live", and a warning icon with the message "El número de regiones que se pueden plegar está limitado a un máxi...".



BACKEND

A screenshot of Visual Studio Code showing the code for the `auth.js` file. The code implements a middleware function to verify JWT tokens. It checks for an authorization header or a local storage item, verifies the token using a private key, and extracts the user ID. If successful, it continues the request; if not, it sends a 401 error.

```
import jwt from "jsonwebtoken";
import { tokenVerificationErrors } from "../configs/jwtfunciones.js";

export const requireToken = (req, res, next) => {
    try {
        let token = req.headers.authorization;
        const tokenLocalStorage = localStorage.getItem("auth");
        let token = req.headers.authorization;
        if (!token) throw new Error("No Bearer");
        //let token = req.headers['x-auth-token'];
        //if (!token) throw new Error("No Bearer");

        console.log(req.headers);
        if (!token) {
            res.status(400).json({msg : "Token no encontrado"});
        }
        token = token.split(" ")[1];
        const { uid } = jwt.verify(token, process.env.JWTPRIVATEKEY);

        req.uid = uid;
        console.log(req.headers);
        next();
    } catch (error) {
        console.log(error.message);
        return res
            .status(401)
            .send({ error: tokenVerificationErrors[error.message] });
    }
}
```

The terminal at the bottom shows the command `PS D:\nuevo_proyecto\frontendmarcadores>`.

Evidencias Despliegue Aplicación

Como evidencia del despliegue de la aplicación, se debe presentar capturas de pantalla donde se visualice este proceso.

Link app (Heroku): <https://marcadores-deportivos.herokuapp.com/>



Administrator: Node.js command prompt

```
C:\Users\Luz Stella Alvarez>D:  
D:\>cd heroku  
D:\heroku>git init  
Initialized empty Git repository in D:/heroku/.git/  
D:\heroku>git status  
On branch master  
  
No commits yet  
  
Untracked files:  
  (use "git add <file>..." to include in what will be committed)  
    .gitignore  
    Middlewares/  
    app.js  
    config/  
    controllers/  
    models/  
    mongodb.js  
    package-lock.json  
    package.json  
    routes/  
    vcorrea/  
  
nothing added to commit but untracked files present (use "git add" to track)  
D:\heroku>
```

Administrator: Node.js command prompt

```
Untracked files:  
  (use "git add <file>..." to include in what will be committed)  
    .gitignore  
    Middlewares/  
    app.js  
    config/  
    controllers/  
    models/  
    mongodb.js  
    package-lock.json  
    package.json  
    routes/  
    vcorrea/  
  
nothing added to commit but untracked files present (use "git add" to track)  
D:\heroku>git add .  
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it  
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it  
D:\heroku>git remote -v  
D:\heroku>heroku git:remote -a marcadores-deportivos  
heroku: Press any key to open up the browser to login or q to exit:  
Opening browser to https://cli-auth.heroku.com/auth/cli/browser/9aa97b62-ff13-4bf8-8107-e67bafe8d9c2?requestor=SFMyNTY.g2gDbQAAAAlxODYuODQuOTEuOTBuBgAQ6jL8hAFIAAFRgA.91  
wqyINzVlJdcS94pd1jsVuGTRpZXzbJcbIVRZuZAg  
Logging in... done  
set git remote heroku to https://git.heroku.com/marcadores-deportivos.git  
D:\heroku>
```



```
Administrator: Node.js command prompt - heroku logs --tail
remote: ----> Installing dependencies
remote:   Installing node modules
remote:
remote:     added 232 packages, and audited 233 packages in 3s
remote:
remote:       15 packages are looking for funding
remote:         run "npm fund" for details
remote:
remote:     found 0 vulnerabilities
remote:
remote: ----> Build
remote:
remote: ----> Caching build
remote:   - npm cache
remote:
remote: ----> Pruning devDependencies
remote:
remote:   up to date, audited 233 packages in 633ms
remote:
remote:     15 packages are looking for funding
remote:       run "npm fund" for details
remote:
remote:     found 0 vulnerabilities
remote:
remote: ----> Build succeeded!
remote: ----> Discovering process types
remote:   Profile declares types → (none)
remote:   Default types for buildpack → web
remote:
remote: ----> Compressing...
remote:   Done: 46.3M
remote: ----> Launching...
remote:   Released v3
remote:   https://marcadores-deportivos.herokuapp.com/ deployed to Heroku
remote:
remote: Verifying deploy... done.
To https://git.heroku.com/marcadores-deportivos.git
 * [new branch]      master -> master

D:\heroku\heroku open
» Warning: heroku update available from 7.53.0 to 7.67.1.

D:\heroku\heroku logs --tail
» Warning: heroku update available from 7.53.0 to 7.67.1.
2022-12-10T03:31:05.399481+00:00 app[api]: Release v1 created by user lefcclis@unal.edu.co
2022-12-10T03:31:05.399481+00:00 app[api]: Initial release by user lefcclis@unal.edu.co
```

<https://git.heroku.com/marcadores-deportivos.git>

The screenshot shows the Heroku dashboard for the 'marcadores-deportivos' application. The interface includes:

- Config Vars:** A section titled 'Config Vars' with a note: 'Config vars change the way your app behaves. In addition to creating your own, some add-ons come with their own.' It displays a table with one row: MON_DBURI (value: mongodb+srv://mariacamilaea:ciclo4desarroll). An 'Add' button is available.
- Buildpacks:** A section titled 'Buildpacks' with a note: 'Buildpacks are scripts that are run when your app is deployed. They are used to install dependencies for your app and configure your environment.' It lists 'heroku/nodejs' and an 'Add buildpack' button.
- SSL Certificates:** A section titled 'SSL Certificates' with a note: 'SSL Certificates provide end-to-end...' and a 'Configure SSL' button.



```
Administrator: Node.js command prompt - heroku logs --tail  
d="186.84.91.96" dyno=web.1 connect=0ms service=0ms status=404 bytes=415 protocol=https  
2022-12-10T13:38:43.048793+00:00 heroku[web.1]: Restarting  
2022-12-10T13:38:43.065289+00:00 heroku[web.1]: State changed from up to starting  
2022-12-10T13:38:43.086790+00:00 heroku[web.1]: Starting app processes with $TERM  
2022-12-10T13:38:44.059666+00:00 heroku[web.1]: Process exited with status 143  
2022-12-10T13:38:42.826791+00:00 app[web.1]: Release v4 created by user mariacamilaee@hotmail.com  
2022-12-10T13:38:42.826791+00:00 app[web.1]: Set MONGODB config vars by user mariacamilaee@hotmail.com  
2022-12-10T13:38:46.073122+00:00 heroku[web.1]: Starting process with command `npm start`  
2022-12-10T13:38:47.077452+00:00 app[web.1]:  
2022-12-10T13:38:47.077501+00:00 app[web.1]: > herokug5@1.0.0 start  
2022-12-10T13:38:47.077502+00:00 app[web.1]: > node app.js  
2022-12-10T13:38:48.229945+00:00 heroku[web.1]: State changed from starting to up  
2022-12-10T13:38:48.099066+00:00 app[web.1]: (node:22) [MONGOOSE] DeprecationWarning: Mongoose: the 'strictQuery' option will be switched back to 'false' by default in Mongoose 7. Use 'mongoose.set('strictQuery', false);' if you want to prepare for this change. Or use 'mongoose.set('strictQuery', true);' to suppress this warning.  
2022-12-10T13:38:48.099071+00:00 app[web.1]: (Use 'node --trace-deprecation ...' to show where the warning was created)  
2022-12-10T13:38:48.099659+00:00 app[web.1]: Conectado en el servidor: http://localhost:1527  
2022-12-10T13:38:48.253906+00:00 app[web.1]: La conexión fue realizada ✓ con éxito a la bd:✓
```

The screenshot shows the Heroku dashboard interface. At the top, there's a header with tabs for 'Your Repositories' and 'Nueva pestaña'. Below the header, the 'Salesforce Platform' logo is visible. The main area features the 'HEROKU' logo and a search bar with the placeholder 'Jump to Favorites, Apps, Pipelines, Spaces...'. A 'Disable Automatic Deployes' button is also present.

Manual deploy

Deploy the current state of a branch to this app.

Deploy a GitHub branch

This will deploy the current state of the branch you specify below. [Learn more](#).

Choose a branch to deploy

A dropdown menu is set to 'main' with a 'Deploy Branch' button next to it. Below the dropdown, several deployment steps are listed with green checkmarks:

- Receive code from GitHub
- Build main | `base99e0`
- Release phase
- Deploy to Heroku

Your app was successfully deployed.

[View](#)

At the bottom of the page, there are links for 'heroku.com', 'Blogs', 'Careers', 'Documentation', 'Support', 'Terms of Service', 'Privacy', 'Cookies', and the copyright notice '© 2022 Salesforce.com'.



```
JS app.js > ...
JS app.js > ...
1 import express from 'express';
2 import {db} from './mongodb.js';
3 import cors from 'cors';
4 import {router} from './routes/routes.js'
5
6 const app = express();
7 app.use(cors());
8 app.use(express.json());
9 app.use('/usuarios',router);
10
11
12 router.get('/', (req,res) => {
13   res.send("🚀 Deploy en Heroku 🚀")
14 }
15
16 var PORT = process.env.PORT || 8000;
17 app.listen(PORT, ()=> {
18   console.log(`Conectado en el servidor: http://localhost:${PORT}`)
19 })
```

Welcome to Heroku
Now that your account has been set up, here's how to get started.

Show next steps

Filter apps and pipelines

marcadores-deportivos

heroku-22 · United States




[←](#) [→](#) [C](#) marcadores-deportivos.herokuapp.com

🚀 😎 Deploy en Heroku 🚀

Link (Eventos): <https://marcadores-deportivos.herokuapp.com/eventos>



Link (Usuarios): <https://marcadores-deportivos.herokuapp.com/usuarios>



```
[{"emailVerified":false,"_id":"637305fdb0ac8d54723b20f3","createdAt":"2022-11-15T03:22:37.598Z","updatedAt":"2022-11-15T03:22:37.598Z"}, {""emailVerified":false,"_id":"637311e403a9b62cc623f220","nomuser":"Juan","password":"123calodi","correo":"juandv@gmail.com","createdAt":"2022-11-15T04:13:24.256Z","updatedAt":"2022-11-15T04:13:24.256Z"}, {""emailVerified":false,"_id":"637312b483a9b62cc623f226","nomuser":"Gabriela","password":"gabbcdfshfd1","correo":"gabypdhggv@gmail.com","createdAt":"2022-11-15T04:16:52.138Z","updatedAt":"2022-11-15T04:16:52.138Z"}, {""emailVerified":false,"_id":"6373134803a9b62cc623f22a","nomuser":"Cris Mateous","password":"mateoush1","correo":"crismateous4@gmail.com","createdAt":"2022-11-15T04:19:20.827Z","updatedAt":"2022-11-15T04:19:20.827Z"}, {""_id":"6386a705b2f2d7923e364757","nomuser":"Maria Camila Esquivel","password":"$2b$12$vcKKRCT8xCXj1CXUxR3x.aH1zCdcbaQTfIsopIblLXoI2","correo":"mariacamilaes2@gmail.com","emailVerified":false,"createdAt":"2022-11-30T00:42:45.256Z","updatedAt":"2022-11-30T00:42:45.256Z"}, {""_id":"6386bbbcb748d10baacb99","nomuser":"Maria Camila Esquivel","password":"$2b$12$9qJyxlB1x6L83miQV037/eeS827t4aNwlOpI2tDthHNx05bsQHn","correo":"mariacamila233@gmail.com","emailVerified":false,"createdAt":"2022-11-30T02:11:08.544Z","updatedAt":"2022-11-30T02:11:08.544Z"}, {""_id":"6387a8879150add61304f730","nomuser":"Maria Camila Esquivel","password":"$2b$12$Ouqfbis94sPbKBCuyP9uXzNw4jANVC9cBxMfUzbR2oibeOXNm","correo":"mariacamilaea@hotmail.com","emailVerified":false,"createdAt":"2022-11-30T19:01:27.815Z"}, {""_id":"6387b0dfae8bf6b38ce826c7","nomuser":"Maria Camila Esquivel","password":"$2b$12$Wd/F7k5PJ4Q6b5/gjgqMuFspQ3nolM0U2QK9xs2ppHHw84o8dPq","correo":"mariacc@gmail.com","emailVerified":false,"createdAt":"2022-11-30T19:37:06.124Z"}, {""_id":"6387e578205a0ddac2a7240e","nomuser":"maria camila","password":"$2b$12$bAvt54g.dP8TOCPt1sMfTzu3V1TcckaTlnHfN/TwX7h48hLnzLpx6","correo":"mariacamila123333@hotmail.com","emailVerified":false,"createdAt":"2022-11-30T23:21:29.325Z"}, {""_id":"6388ba9d79fab69abb65c364c","nomuser":"Maria Camila ","password":"$2b$12$KiVi3F1VTQoqSrp9Vu0QOK2r9ERRArJhByohxuqRKYfmmIYiuq","correo":"mariacamilaes12@gmail.com","emailVerified":false,"createdAt":"2022-12-03T19:56:07.494Z"}, {""_id":"6388bc5eala80627ad543a249","nomuser":"camilo alvarez","password":"$2b$12$pvs6P2sLEnu8aQBg2km./hNsGg45KHkp5tmtFyqkoCE55Fe0C6","correo":"alvarez@hotmail.com","emailVerified":false,"createdAt":"2022-12-03T21:55:54.537Z"}, {""_id":"638bcd3dia80627ad543a255","nomuser":"gabriela alba","password":"$2b$12$Nrqtckwskvpkvksv15AZENC.2.q7s7l69DHISmuB0KLH3G6yKL96K56","correo":"gabrielaalba@hotmail.com","emailVerified":false,"createdAt":"2022-12-03T22:27:09.401Z"}, {""_id":"6388bcd1la80627ad543a259","nomuser":"Rocha Monto","password":"$2b$12$NYRe81c8Uz5AEqh0weBReekCNa4cejh1OpzKm0jOXKyb87zWys05","correo":"rocha123@hotmail.com","emailVerified":false,"createdAt":"2022-12-03T22:29:16.601Z"}, {""_id":"6388cddea1a80627ad543a25b","nomuser":"Lu Stalla Alvarez","password":"$2b$12$RPaxPb4ijULc.uYMN25j4.F2hVfiHYsb4xDloRH3lMpDW3mlQnC7u","correo":"lucero@hotmail.com","emailVerified":false,"createdAt":"2022-12-03T22:30:02.368Z"}, {""_id":"638bce11a80627ad543a25d","nomuser":"Lucero Gambo","password":"$2b$12$cukke1pA2zfQXbDq/psr.Q53KVFBUsbDaxZNghF3ig5zwe7yr0XwI","correo":"lucerog@hotmail.com","emailVerified":false,"createdAt":"2022-12-03T22:30:41.899Z"}, {""_id":"638bd414ade0f937c8a0f65","nomuser":"Vanesa Cortes","password":"$2b$12$hcq7v76hleoB60Rd4RgudeeoSwbkp2pz22i/qE4z5gkNdNW6QK","correo":"cvanesa@gmail.com","emailVerified":false,"createdAt":"2022-12-03T22:56:26.960Z"}, {""_id":"6392062b8edd27758c10005f","nomuser":"Natasha Valencia","password":"$2b$12$kl18SRh1155XRR6frD5rB.NgjEh2Ug05cpLlRr.iIom7pwkrRN3q","correo":"natashavalen@hotmail.com","emailVerified":false,"createdAt":"2022-12-08T15:43:42.116Z"}, {""_id":"63923a631267f56a9d06eb05","nomuser":"Thomas Val","password":"$2b$12$1/Nshvrsls77lUMPAUHU.Ek2NcgHjdgD0U.V9dLmhC02HJu83","correo":"thomasvalen@hotmail.com","emailVerified":false,"createdAt":"2022-12-08T19:26:27.565Z"}, {""_id":"63923b01267f56a9d06eb0c","nomuser":"cher Adams","password":"$2b$12$6R/HFgfVYQ54J5vonyNUPO58ujm5lmf.EE2FQOR9h1KE8B05kW1C","correo":"cheradams@hotmail.com","emailVerified":false,"createdAt":"2022-12-08T19:31:12.810Z"}, {""_id":"63923cab1267f56a9d06eb16","nomuser":"Rafael Velez","password":"$2b$12$uIL8k5Ybf4mv06LN.8Q5us14dqj.v9rlz0WvHAGXN8Ce/93656","correo":"rafaelvelez@hotmail.com","emailVerified":false,"createdAt":"2022-12-08T19:36:11.727Z"}, {""_id":"6392401e1267f56a9d06eb1a","nomuser":"Maria Camila","password":"$2b$12$T1UhYStD3/AbiPf5JDQpD.7HijNECKFJ1hNiiP4bmUOaWuzHrY6","correo":"mariacamila@gmail.com","emailVerified":false,"createdAt":"2022-12-08T19:50:54.860Z"}, {""updatedAt":"2022-12-08T19:50:54.860Z"}]
```



Marcadores Deportivos - Qatar x +

localhost:3000

No sincronizando ...

Bienvenido

Marcadores Deportivos - Qatar 2022

MUNDIAL DE FUTBOL (QATAR) LOGIN CREAR (LOGIN UP) MARCADORES DEPORTIVOS ▾

USUARIOS HELP

Marcadores Deportivos - Qatar x +

localhost:3000/users

No sincronizando ...

Bienvenido

Marcadores Deportivos - Qatar 2022

MUNDIAL DE FUTBOL (QATAR) LOGIN CREAR (LOGIN UP) MARCADORES DEPORTIVOS ▾

USUARIOS HELP

Nombre Correo Password

create

edit Eliminar



camilo alvarez	alvarezc@hotmail.com	\$2b\$12\$PtvS6P2sLEnw8a6QBgZkm./hMsGq4SKHhKp5tm tFYqkoCE55Fe0C6	editar	Eliminar
gabriela alba	gabrielaalba@hotmail.com	\$2b\$12\$MrqtkwSkvpVksVl5AZEMC.2.q7s7I69DHISmUB0KIH3G6yKL96K56	editar	Eliminar
Rocha Monte	rocha123@hotmail.com	\$2b\$12\$NYRe8lc8Uz5AEqh0weBReeKCNa4cejhl0PzKmGjOXKyb87zWys05e	editar	Eliminar
Luz Stella Alvarez	lucero@hotmail.com	\$2b\$12\$RPaxPb4ljWlc.uYMU2Sj4.F2hVflHysb4xDNoRH3IMpDW3mWqnC7u	editar	Eliminar
Lucero Gambo	lucerog@hotmail.com	\$2b\$12\$cuMkeIpAZJfTQxbDq/q5R.QS3KVFBUs8DAxZMGhF3igSzwe7yrOxW	editar	Eliminar
Vanesa Cortes	cvanesa@gmail.com	\$2b\$12\$hcq7qV76hleoCB6ORd4RgudeeDsMwbKpZpz2zi/qE4zSgKNdMV6QK	editar	Eliminar
Natasha Valencia	natashavalen@hotmail.com	\$2b\$12\$kZIBSRh1155XRRGfrD5rB.NgjEh2Ug05CplIRr.iIom7pwkruRW3q	editar	Eliminar
Thomas Val	thomasvalen@hotmail.com	\$2b\$12\$i/Nshrvrs877uLUAPAUhU.Ek2NcegHjdGD0U.v9PdLmQhC02MuJy8S	editar	Eliminar
Cher Adams	cheradams@hotmail.com	\$2b\$12\$6R/HFgfVYQ54J5vonYNUPOS8Ujm5Wmf.EE2FQOR9bHlk6BBo5kw1C	editar	Eliminar
Rafael Velez	rafaelvelez@hotmail.com	\$2b\$12\$ull8kSYbbF4mv06LN.8QSusl4dqj.v9nl20NvHAGXM8nCe/9J6S6	editar	Eliminar
Maria Camila	mariacamila@gmail.com	\$2b\$12\$T1UhYSfd3/AbiPfsJDQpD.7MljNECKFjhM1i/Bp4muEOaWuzHrY6	editar	Eliminar
Belen Torres	belentorres@gmail.com	\$2b\$12\$Zfk.Qp1tPztL5V/0JE.BceZKaOQXjpxqUa5lvYTUpRGbm gHY.5my	editar	Eliminar

POST https://app-g51gh.herokuapp.com/reguser

Params Headers (10) Body Pre-request Script Tests Settings Cookies Beautify

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```

1
2   "nomuser": "Carolina Pinzón",
3   "correo": "carolinapinzon@gmail.com",
4   "password": "123456"
5
6
    
```

Body Cookies Headers (9) Test Results Status: 200 OK Time: 839 ms Size: 550 B Save Response

Pretty Raw Preview Visualize JSON

```

1
2   "nomuser": "Carolina Pinzón",
3   "password": "$2b$12$3HYM885c6h1Re7CY3F3wuLa0JACPfLoisLt9RDbZxtv80NSYnnCC",
4   "correo": "carolinapinzon@gmail.com",
5   "emailVerified": false,
6   "_id": "630ff60faf5099ec1dmb72c1",
7   "createdAt": "2022-12-07T02:10:23.056Z",
8   "updatedAt": "2022-12-07T02:10:23.056Z"
9
    
```



Marcadores Deportivos - Qatar

localhost:3000/shevento

No sincronizando

Marcadores Deportivos - Qatar 2022

Bienvenido

MUNDIAL DE FUTBOL (QATAR)

LOGIN CREAR (LOGIN UP) MARCADORES DEPORTIVOS

USUARIOS HELP

Fecha	Equipo 1	Equipo 2	Marcador E1	Marcador E2	Tipo Evento	
localhost:3000/shevento#						





MUNDIAL DE FUTBOL (QATAR) LOGIN CREAR (LOGIN UP) MARCADORES DEPORTIVOS ▾

USUARIOS HELP

Editar Eventos Deportivos

Fecha 2022-12-03T05:00:00.00

Equipo1 Paises Bajos

Equipo2 Estados Unidos

Marcador E1 3

Marcador E2 1

Tipo Evento Futbol



MUNDIAL DE FUTBOL (QATAR) LOGIN CREAR (LOGIN UP) MARCADORES DEPORTIVOS ▾

USUARIOS HELP

Editar Eventos Deportivos

Fecha 2022-12-03T05:00:00.00

Equipo1 Paises Bajos

Equipo2 Croacia

Marcador E1 3

Marcador E2 2

Tipo Evento Futbol



Marcadores Deportivos - Qatar

localhost:3000/shevento

2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Croacia	3	2	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		
2022-12-03T05:00:00.000Z	Paises Bajos	Estados Unidos	3	1	Futbol		

Salesforce Platform

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

Personal > marcadores-deportivos

GitHub mariacamilaea@herokuapp.com main

Overview Resources Deploy Metrics Activity Access Settings

Metrics (last 24hrs) All Metrics

Latest activity All Activity

Installed add-ons \$0.00/month Configure Add-ons

Heroku marked free databases for deletion


As of November 28th, 2022, free Heroku Postgres and Heroku Data for Redis® plans are no longer available. If Heroku deleted your free database and you want to recover your data, contact Support as soon as possible.

Support Learn more

Esperando m.stripe.com... app



<https://marcadores-deportivos.herokuapp.com/usuarios>



🚀 😊 Deploy en Heroku 🚀 🚀

The screenshot shows the Heroku dashboard at dashboard.heroku.com/apps. The main header includes the Salesforce Platform logo, the Heroku logo, and a search bar labeled "Jump to Favorites, Apps, Pipelines, Spaces...". A "Personal" dropdown and a "New" button are also visible. The central area features a purple background with a sunburst graphic and the text "Welcome to Heroku" followed by "Now that your account has been set up, here's how to get started.". Below this is a "Show next steps" button and a "Filter apps and pipelines" search bar. A specific app named "marcadores-deportivos" is listed, showing its status as "Node.js · heroku-22 · United States". The bottom navigation bar includes links for heroku.com, Blogs, Careers, Documentation, Support, Terms of Service, Privacy, Cookies, and a copyright notice for © 2022 Salesforce.com.



← → C dashboard.heroku.com/apps/marcadores-deportivos/settings

Salesforce Platform

HEROKU Jump to Favorites, Apps, Pipelines, Spaces...

Region United States
Stack heroku-22
Framework Node.js
Slug size 46.3 MiB of 500 MiB
GitHub repo [mariacamilaea/herokumarcadoresdeportivos](#)
Heroku git URL <https://git.heroku.com/marcadores-deportivos.git>

Config Vars

Config Vars Hide Config Vars

JWTPRIVATEKEY AhglxhJ068zLD0gulSyIumKRQh486PAXX3wQis; MON_DBURI mongodb+srv://mariacamilaea:ciclo4desar...

KEY VALUE Add

usuarios / <http://localhost:8000/usuarios/shuser>

GET https://app-g51gh.herokuapp.com/shuser

Params Authorization Headers (10) Body Pre-request Script Tests Settings

Type Bearer Token Heads up! These parameters hold sensitive data. To keep this data secure while working in a collaborative environment, we recommend using variables. Learn more about [variables](#).

The authorization header will be automatically generated when you send the request. Learn more about [authorization](#).

Token eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ...

Body Cookies Headers (9) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
  "emailVerified": false,
  "_id": "63742cad39chbb127c4fe8164",
  "nameUser": "Sandra María lopez",
  "password": "$2b$10$SlvV0.06.PT0ym1e/06h.2Ta4csCAIoFe2zAf0F3VMERg9d75.g",
  "correo": "dramaria@hotmail.com",
  "createdAt": "2022-11-16T00:19:44.959Z",
  "updatedAt": "2022-11-16T00:19:44.959Z"
}
```

Status: 200 OK Time: 407 ms Size: 10.82 KB Save Response



Home Workspaces API Network Explore Search Postman Invite Help Upgrade

My Workspace New Import Overview POST http://localhost:8000/usuarios/login No Environment

New Collection Tiendabarrio

POST http://localhost:8000/usuarios/login

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies

Type Bearer To... Token Token

The authorization header will be automatically generated when you send the request. Learn more about authorization ↗

Body Cookies Headers (8) Test Results Status: 200 OK Time: 984 ms Size: 418 B Save Response

Pretty Raw Preview Visualize JSON

```
1   "token": {  
2     "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpYXQiOjE2NzAyOTM3MjMsImV4cCI6MTY3MDI5NTUyM30.  
3       9hmR3wiadfsywIQIRgBRQLuvv5HUx4djeYzhSwGL1U"  
4   }  
5 }
```

Online Find and Replace Console Cookies Capture requests Runner Trash

Evidencia GitLab o GitHub

Evidencia de la realización de alguna actualización (commit), donde se visualice la actualización y el historial de actualizaciones (Versión)

Link de Github (Heroku): <https://github.com/mariacamilaea/herokumarcadoresdeportivos>



mariacamilaea / herokumarcadoresdeportivos (Public)

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

main 1 branch 0 tags Go to file Add file < Code About

No description, website, or topics provided.

0 stars 1 watching 0 forks

Commits (26 commits)

Author	Commit Message	Time Ago
mariacamilaea	actualizacion	f954460 2 hours ago
	Midlwares	heroku 4 hours ago
	configs	heroku 4 hours ago
	controllers	heroku 4 hours ago
	models	heroku 4 hours ago
	routes	heroku 4 hours ago
	vcorreo	heroku 4 hours ago
	app.js	actualizacion 2 hours ago
	mongodb.js	heroku 4 hours ago
	package-lock.json	heroku 4 hours ago
	package.json	heroku 4 hours ago

Add a README

Help people interested in this repository understand your project by adding a README.

Search or jump to... Pull requests Issues Codespaces Marketplace Explore

mariacamilaea / herokumarcadoresdeportivos (Public)

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

main Commits on Dec 10, 2022

actualizacion	mariacamilaea committed 2 hours ago	Verified	f954460	<>
app.js	mariacamilaea committed 2 hours ago	Verified	b6a79e7	<>
Delete app.js	mariacamilaea committed 2 hours ago	Verified	50b4683	<>
heroku	mariacamilaea committed 4 hours ago	Verified	d4568b1	<>
Delete app.js	mariacamilaea committed 4 hours ago	Verified	4077c23	<>
Delete estacorreobien.js	mariacamilaea committed 4 hours ago	Verified	f1619a3	<>
Delete mongodb.js	mariacamilaea committed 4 hours ago	Verified	f02cf08	<>



Link de Github (Frontend): <https://github.com/lefcelis/Frontend-Marcadores-Deportivos>

Screenshot of the GitHub repository page for 'Frontend-Marcadores-Deportivos'.

Code tab selected. Main branch: main. 2 branches, 0 tags.

Commits:

- 78bda7d 2 minutes ago (16 commits)
- frontend.modificaciones (8 hours ago)
- frontend.nuevo (2 days ago)
- src (5 days ago)
- 12 days ago (2 minutes ago)
- frontendproyecto (12 days ago)
- frontend (6 days ago)
- frontend (6 days ago)
- Frontend.nuevo (5 days ago)
- frontendproyecto (12 days ago)
- node_modules.rar (12 days ago)
- frontend.modificaciones (2 days ago)

About: Frontend del proyecto: Marcadores Deportivos de la Copa Mundial de la FIFA Catar 2022.

Readme: No releases published. Create a new release.

Packages: No packages published. Publish your first package.

Commits on Dec 10, 2022:

- src (Verified) 78bda7d
- Delete src directory (Verified) 9362c40
- Sprint_3 (Verified) 3f89078
- Delete Acta_Reunión Sprint 3.docx.pdf (Verified) 4b05453

Commits on Dec 8, 2022:

- frontend.modificaciones (Verified) 4e535c5

Commits on Dec 5, 2022:



Link Github (Backend): <https://github.com/lefcelis/Backend-Marcadores-Deportivos>

The screenshot shows the GitHub repository page for 'Backend-Marcadores-Deportivos'. The repository is public and has 1 branch and 0 tags. The main branch has 23 commits. The commits list includes actions like deleting middleware directories, updating Acta_Sprint2, and modifying various files like config, controllers, and models. The repository has 1 watching and 0 forks. It also includes sections for About, Releases, and Packages.

Commit	File	Date
mariacamilaea Delete middleware directory	Delete middleware directory	2 days ago
Acta_Sprint2	Delete Acta_Reunión Sprint 2.docx.pdf	18 days ago
Midwares	Delete autenticacion.js	2 days ago
Sprint1	Sprint	19 days ago
configs	Backend modificado	5 days ago
controllers	backend.actualizado	2 days ago
models	Backend modificado	5 days ago
node_modules	Se agrega Backend del proyecto	20 days ago
routes	backend.actualizado	2 days ago
vcorreo	Backend modificado	5 days ago
.dockerignore	Se agrega el contenido de la carpeta DockerG51	26 days ago
.gitignore	Se modifica Controllers para Eventos y Usuarios	21 days ago

Evidencia JIRA (Seguimiento del proyecto)

Como evidencia del seguimiento del proyecto con la metodología ágil SCRUM, utilizando el software JIRA, se debe presentar capturas de pantalla donde se visualice la ejecución de los Sprint con las historias de usuario relacionadas con los procesos del Sprint.

Link Jira: <https://g52c3.atlassian.net/jira/software/projects/GRUPO51/boards/3/backlog>



Jira Software Tu trabajo Proyectos Filtros Paneles Personas Aplicaciones Crear Buscar

MarcadoresDeportivos Proyecto de software

PLANIFICACIÓN Hoja de ruta

Backlog

DESARROLLO Código

Páginas de proyectos Añadir acceso rápido Configuración del pro...

Estás en un proyecto gestionado por el equipo Más información

Proyectos / MarcadoresDeportivos Backlog

Backlog Sprint 4 3 dic – 13 dic (6 incidencias) Completar sprint ...

GRUPO51-48 URL Funcional FINALIZADA ✓

GRUPO51-43 Evidencia de la configuración de la Aplicación FINALIZADA ✓

GRUPO51-44 Evidencia sobre el despliegue de la Aplicación FINALIZADA ✓

GRUPO51-45 Evidencias en Github y Jira (Repositorio y Se... FINALIZADA ✓

GRUPO51-46 Subir evidencia del Sprint 4 FINALIZADA ✓

GRUPO51-47 Evidencias de las reuniones de eq... FINALIZADA ✓

+ Crear incidencia

Backlog (0 incidencias) Crear sprint

Evidencias de las reuniones de equipo

Añadir epic / GRUPO51-47

Finalizada ✓ Lista

Descripción Añadir una descripción...

Archivos adjuntos (1) Añadir un comentario...

Consejo de expertos: pulsa M para comentar

Insights

Jira Software Tu trabajo Proyectos Filtros Paneles Personas Aplicaciones Crear Buscar

MarcadoresDeportivos Proyecto de software

PLANIFICACIÓN Hoja de ruta

Backlog

DESARROLLO Código

Páginas de proyectos Añadir acceso rápido Configuración del pro...

Estás en un proyecto gestionado por el equipo Más información

Proyectos / MarcadoresDeportivos Backlog

Backlog Sprint 4 3 dic – 13 dic (6 incidencias) Completar sprint ...

GRUPO51-48 URL Funcional FINALIZADA ✓

GRUPO51-43 Evidencia de la configuración de la Aplicación FINALIZADA ✓ LC

GRUPO51-44 Evidencia sobre el despliegue de la Aplicación FINALIZADA ✓ LC

GRUPO51-45 Evidencias en Github y Jira (Repositorio y Seguimiento del proyecto) FINALIZADA ✓

GRUPO51-46 Subir evidencia del Sprint 4 FINALIZADA ✓

GRUPO51-47 Evidencias de las reuniones de equipo FINALIZADA ✓

+ Crear incidencia

Backlog (0 incidencias)

Quickstart



Jira Software Tu trabajo Proyectos Filtros Paneles Personas Aplicaciones Crear Buscar

MarcadoresDeportivos Proyecto de software

PLANIFICACIÓN

- Hoja de ruta
- Backlog
- Tablero**

DESARROLLO

- Código
- Páginas de proyectos
- Añadir acceso rápido
- Configuración del pro...

Estás en un proyecto gestionado por el equipo
Más información

Proyectos / MarcadoresDeportivos All sprints

SEARCH LC Sprint AGRUPAR POR Responsable Insights

POR HACER EN CURSO LISTO 28 INCIDENCIAS +

María Camila Esquivel Álvarez 12 incidencias

Documentación Sprint 1 GRUPO51-16 ✓

Épicas e historias de usuario GRUPO51-17 ✓

Acta de la Reunión GRUPO51-18 ✓

Evidencia Jira (Seguimiento proyecto) GRUPO51-31 ✓

Quickstart

Jira Software Tu trabajo Proyectos Filtros Paneles Personas Aplicaciones Crear Buscar

MarcadoresDeportivos Proyecto de software

PLANIFICACIÓN

- Hoja de ruta**
- Backlog
- Tablero

DESARROLLO

- Código
- Páginas de proyectos
- Añadir acceso rápido
- Configuración del pro...

Estás en un proyecto gestionado por el equipo
Más información

Proyectos / MarcadoresDeportivos Hoja de ruta

Dar feedback Compartir Exportar

Categoría de esta... OCT NOV DIC

Sprints Tablero Sprint 1 Tab... Tab... Tab... Tablero Sprint 4

+ Crear Epic

Hoy Semanas Meses Trimestre Quickstart



Evidencias de las Reuniones de Equipo

Como evidencia de las reuniones que efectúa el equipo del proyecto, presentar capturas de pantalla de las reuniones efectuadas y si lo consideran pertinente algunas actas de las reuniones.

Reunión SCRUM. Ciclo 4 Misión TIC

10 de Diciembre de 2022, 05:00pm

Información para unirse a Google Meet

Enlace a la videollamada: <https://meet.google.com/suz-dwxx-qxg>

